Test Report issued under the responsibility of:

TÜVRheinland®

TEST REPORT
IEC 62368-1
Audio/video, information and communication technology equipment
Part 1: Safety requirements

Report Number. ..... :	CN2539BT 001
Date of issue ..... :	2025-12-17
Total number of pages ..... :	52 (excluding report attachments, see page 3)
Name of CB Testing Laboratory preparing the Report ..... :	TÜV Rheinland (Shanghai) Co., Ltd.
Applicant's name ..... :	Zhejiang MRDVS Technology Co.,Ltd.
Address ..... :	7-902, China Artificial Intelligence Town, No.1818-2 Wenyi West Road, Hangzhou, Zhejiang, P.R. China
Test specification:	
Standard ..... :	IEC 62368-1:2023
Test procedure ..... :	CB Scheme
Non-standard test method ..... :	N/A
TRF template used ..... :	IECEE OD-2020-F1:2024, Ed.1.7
Test Report Form No. ..... :	IEC62368_1F
Test Report Form(s) Originator .... :	UL Solutions (US)
Master TRF ..... :	Dated 2025-06-13

Copyright © 2025 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes if the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description ..... :	S10Ultra-Lite Solid-State Lidar		
Trademark(s) ..... :	MRDVS		
Manufacturer ..... :	Same as applicant		
Model/Type reference ..... :	LXPS-SA7A0-8CE-940A		
Ratings ..... :	24VDC, 3A		
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):			
☒	**CB Testing Laboratory:**	TÜV Rheinland (Shanghai) Co., Ltd.	
Testing location/ address.....:		No.177, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China Workshop14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi Town, Taicang City, Jiangsu Province, China	
Tested by (name, function, signature).....:		Chong Tan (for IEC 62368-1:2023) / Junjie Mao (for IEC 60825-1:2014)/ Project engineer	Chong Tan Junjie Mao
Approved by (name, function, signature)...:		James Zhang / Technical Expert	James Zhang
☐	**Testing procedure: CTF Stage 1:**	N/A	
Testing location/ address.....:			
Tested by (name, function, signature).....:			
Approved by (name, function, signature)...:			
☐	**Testing procedure: CTF Stage 2:**	N/A	
Testing location/ address.....:			
Tested by (name + signature).....:			
Witnessed by (name, function, signature) .:			
Approved by (name, function, signature)...:			
☐	**Testing procedure: CTF Stage 3:**	N/A	
☐	**Testing procedure: CTF Stage 4:**	N/A	
Testing location/ address.....:			
Tested by (name, function, signature).....:			
Witnessed by (name, function, signature) .:			
Approved by (name, function, signature)...:			
Supervised by (name, function, signature) :			

List of Attachments (including a total number of pages in each attachment):

-Attachment: IEC 62368-1 National differences (44 pages)

-Attachment: IEC 60825-1 test report (19 pages)

-Attachment: IEC 60825-1 National differences (17 pages)

-Attachment: Photo Documentation (9 pages)

Note: Total number of pages in each attachment is indicated in individual attachment.

Summary of testing:

Tests performed (name of test, test clause and date test performed):	**Testing location:**
• All applicable tests as described in the compliance checklist were performed at model LXPS-SA7A0-8CE-940A. See the measurement section for details. • The test samples are pre-production samples without serial numbers. • The manufacturer specified maximum operating temperature is 75°C.	IEC 62368-1:2023 test on: Workshop14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi Town, Taicang City, Jiangsu Province, China IEC 60825-1:2014 test on: No.177, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China

Summary of compliance with National Differences

- IECEE Member countries that are also CENELEC members

  Compliance with Group Differences evaluated ☒ **yes** ☐ **No** ☐ N/A

- IECEE Member countries with published National Differences which were evaluated:

  EU Group Differences, EU Special National Conditions, CA, US, JP

  Explanation of used codes: CA=Canada, US=United States of America, JP=Japan

- IECEE Member countries that did not publish any National Differences:

  N/A

Use of uncertainty of measurement for decisions on conformity (decision rule) :

☒ No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").


☐ Other: … (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

Information on uncertainty of measurement:
The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.
IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.


Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

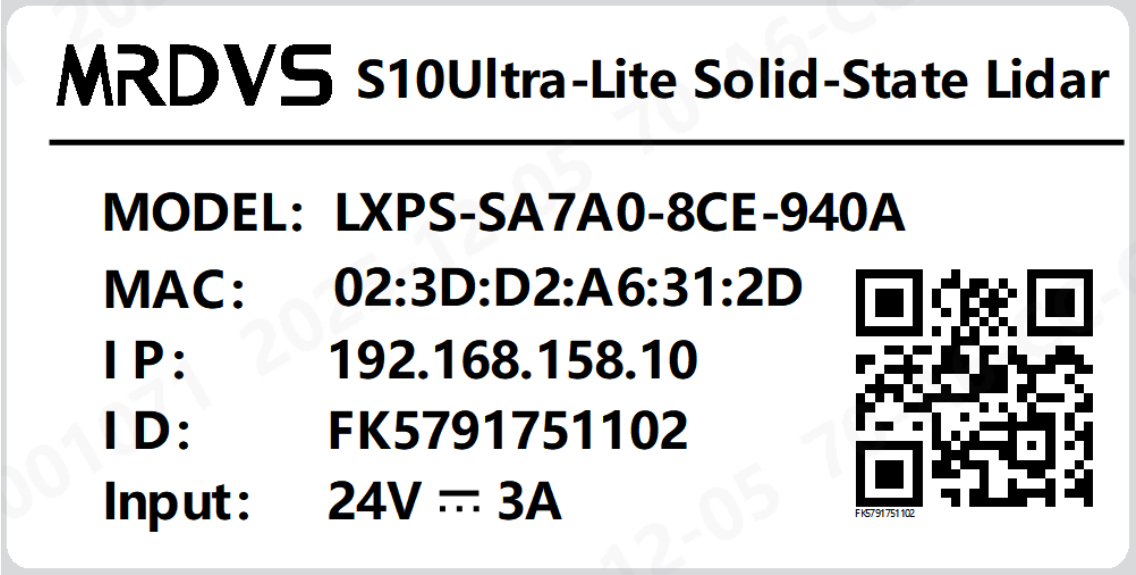

<Laser warning label>

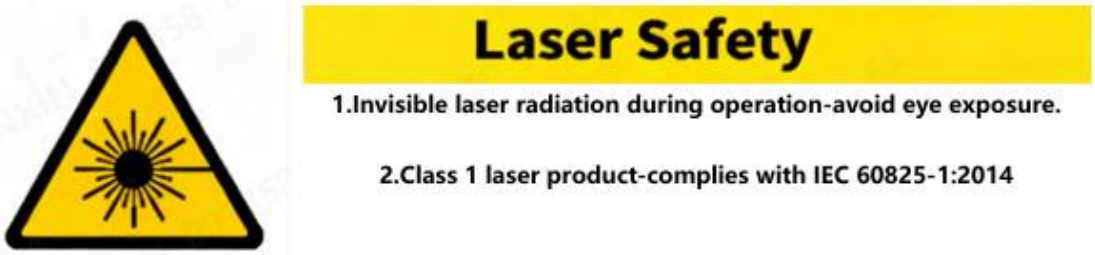

Note:

1. As declared by the applicant, the importer's name, registered trade name or registered trade mark and the postal address will be marked on the products before being place on the market. The contact details shall be in a language easily understood by end-users and market surveillance authorities.

Test item particulars:	
Product group ..... :	☐ end product ☒ built-in component
Classification of use by ..... :	☐ Ordinary person ☐ Children likely present ☒ Instructed person ☒ Skilled person
Supply connection..... :	☐ AC mains ☐ DC mains ☒ not mains connected: ☒ ES1 ☐ ES2 ☐ ES3
Supply tolerance ..... :	☐ +10%/-10% ☐ +20%/-15% ☐ + %/ - % ☒ None
Supply connection – type ..... :	☐ pluggable equipment type A - ☐ non-detachable supply cord ☐ appliance coupler ☐ direct plug-in ☐ pluggable equipment type B - ☐ non-detachable supply cord ☐ appliance coupler ☐ permanent connection ☐ mating connector ☒ other: not directly connected to the mains
Considered current rating of protective device... :	☐ A; Location: ☐ building ☐ equipment ☒ N/A
Equipment mobility..... :	☐ Movable ☐ hand-held ☐ transportable ☐ direct plug-in ☐ stationary ☒ for building-in ☐ wall/ceiling-mounted ☐ SRME/rack-mounted ☐ other:
Overvoltage category (OVC) ..... :	☐ OVC I ☐ OVC II ☐ OVC III ☐ OVC IV ☒ other: not directly connected to the mains
Class of equipment ..... :	☐ Class I ☐ Class II ☐ Class II with functional earthing ☒ Class III ☐ Not classified ☐
Special installation location ..... :	☒ N/A ☐ restricted access area ☐ outdoor location ☐
Pollution degree (PD) ..... :	☐ PD 1 ☒ PD 2 ☐ PD 3
Manufacturer's specified T_{ma}..... :	75 °C ☐ Outdoor: minimum °C
IP protection class ..... :	☒ IPX0 ☐ IP___
Power systems ..... :	☐ TN ☐ TT ☐ IT - V_{L-L} ☒ not AC mains
Altitude during operation (m) ..... :	☐ 2000 m or less ☒ 5000 m or less
Altitude of test laboratory (m) ..... :	☒ 2000 m or less ☐ m
Mass of equipment (kg) ..... :	0.42 kg

Possible test case verdicts:

- test case does not apply to the test object.....: N/A

- test object does meet the requirement.....: P (Pass)

- test object does not meet the requirement.....: F (Fail)

Testing.....:

Date of receipt of test item .....: 2025-11-24

Date (s) of performance of tests.....: 2025-12-02 to 2025-12-04

General remarks:

"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided ..... :	☐ **Yes** ☒ **Not applicable**

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies).....: Zhejiang MRDVS Technology Co., Ltd.
1st Floor, No. 5 Building, Phase II of High-end ManufacturinIndustrial Park, No. 1177 Xin'an Road, High-tech Zone, Wuxing District, Huzhou, Zhejiang, P.R. China

General product information and other remarks:

Product Description
The product covered by this report is a lidar camera, generally used with information technology equipment.
The EUT is powered by external DC power source. The external power source shall be isolated from the mains by double or reinforced insulation, and its output shall be complied with LPS or PS2 circuit.
The product is classified as Class 1 laser product.

Additional application considerations
All components or sub-assemblies suitability of use has been checked according to subclause 4.1.1 and 4.1.2

OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS				
Clause	**Possible Hazard**			
5	Electrically-caused injury			
Class and Energy Source (e.g. ES3: Primary circuit)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
ES1: input	Instructed or skilled	--	--	--
6	Electrically-caused fire			
Class and Energy Source (e.g. PS2: 100 Watt circuit)	Material part (e.g. Printed board)	Safeguards		
		B	1st S	2nd S
PS2: input	Instructed or skilled	Comply with 6.4.5	--	--
7	Injury caused by hazardous substances			
Class and Energy Source (e.g. Ozone)	Body Part (e.g., Skilled)	Safeguards		
		B	S	R
--	--	--	--	--
8	Mechanically-caused injury			
Class and Energy Source (e.g. MS3: Plastic fan blades)	Body Part (e.g. Ordinary)	Safeguards		
		B	S	R
MS1: Sharp edges and corners	Instructed or skilled	--	--	--
MS1: Mass of equipment	Instructed or skilled	--	--	--
9	Thermal burn			
Class and Energy Source (e.g. TS1: Keyboard caps)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
TS1: All accessible parts	Instructed or skilled	For built-in component, it should also be evaluated in end product.	--	--
10	Radiation			
Class and Energy Source (e.g. RS1: PMP sound output)	Body Part (e.g., Ordinary)	Safeguards		
		B	S	R
RS1: Class 1 laser product	Instructed or skilled	Complied with IEC 60825-1	--	--
Supplementary Information: "B" – Basic Safeguard; "S" – Supplementary Safeguard; "R" – Reinforced Safeguard				

ENERGY SOURCE DIAGRAM
Optional. Manufacturers are to provide the energy sources diagram identify declared energy sources and identifying the demarcations are between power sources. Recommend diagram be provided included in power supply and multipart systems. Insert diagram below. Example diagram designs are; Block diagrams; image(s) with layered data; mechanical drawings
See above table 'OVERVIEW OF ENERGY SOURCES AND SAFEGUARDS' ☒ **ES** ☒ **PS** ☒ **MS** ☒ **TS** ☒ **RS**

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4	**GENERAL REQUIREMENTS**		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components	Components which are certified to IEC and/or national standards are used correctly within their ratings. Components not covered by IEC standards are tested under the conditions present in the equipment	P
4.1.3	Equipment design and construction		P
4.1.4	Specified ambient temperature for outdoor use (°C) ..... :		N/A
4.1.5	Constructions and components not specifically covered		N/A
4.1.8	Liquids, refrigerants and liquid filled components (LFCs)	(See Clause G.15)	N/A
4.1.15	Markings and instructions	(See Annex F)	P
4.4.3	Safeguard robustness		P
4.4.3.1	General		P
4.4.3.2	Steady force tests	(See Clause T.3, T.4, T.5)	P
4.4.3.3	Drop tests	(See Clause T.7)	N/A
4.4.3.4	Impact tests	(See Clause T.6)	P
4.4.3.5	Internal accessible safeguard tests	(See Clause T.3)	N/A
4.4.3.6	Glass impact tests	(See Clause T.9)	N/A
4.4.3.7	Glass fixation test		N/A
	Glass impact test (1J)	(See Clause T.9)	N/A
	Push/pull test (10 N)		N/A
4.4.3.8	Thermoplastic material tests	(See Clause T.8)	N/A
4.4.3.9	Air comprising a safeguard		N/A
4.4.3.10	Accessibility, glass, safeguard effectiveness		N/A
4.4.4	Displacement of a safeguard by an insulating liquid		N/A
4.4.5	Safety interlocks	(See Annex K)	N/A
4.5	**Explosion**		P
4.5.1	General		P
4.5.2	No explosion during normal/abnormal operating conditions	(See Clause B.2)	P
	No harm by explosion during single fault conditions	(See Clause B.4)	P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.6	**Fixing of conductors and conductive parts**		N/A
	Fix conductors and conductive parts not to defeat a safeguard		N/A
	Compliance is checked by test ..... :	(See Clause T.2)	N/A
4.7	**Equipment for direct insertion into mains socket–outlets**		N/A
4.7.2	Mains plug part complies with relevant standard ... :		N/A
4.7.3	Torque (Nm) ..... :		N/A
4.8	**Equipment containing coin or button cell batteries**		N/A
4.8.1	General		N/A
4.8.2	Instructional safeguard ..... :		N/A
4.8.3	Coin or button cell battery compartment, door or cover construction		N/A
	Open torque test		N/A
4.8.4.2	Stress relief test	(See Clause T.8)	N/A
4.8.4.3	Battery replacement test		N/A
4.8.4.4	Drop test	(See Clause T.7)	N/A
4.8.4.5	Impact test	(See Clause T.6)	N/A
4.8.4.6	Crush test		N/A
4.8.5	Compliance		N/A
	30N force test with test probe		N/A
	20N force test with test hook		N/A
4.9	**Likelihood of fire or shock due to entry of conductive object**		N/A
4.10	**Component requirements**		N/A
4.10.1	Disconnect device	(See Annex L)	N/A
4.10.2	Switches and relays	(See Annex G)	N/A
4.10.3	Mains power supply cords	(See Clause G.7)	N/A
4.10.4	Batteries and their protection circuits	(See Annex M)	N/A

5	**ELECTRICALLY-CAUSED INJURY**		P
5.2	**Classification and limits of electrical energy sources**		P
5.2.2	ES1 and ES2 limits		P
5.2.2.2	Steady-state voltage and current limits ..... :	(See appended table 5.2)	P
5.2.2.3	Capacitance limits ..... :	(See appended table 5.2)	N/A
5.2.2.4	Single pulse limits ..... :	(See appended table 5.2)	N/A
5.2.2.5	Limits for repetitive pulses ..... :	(See appended table 5.2)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.6	Ringing signals	(See Annex H)	N/A
5.2.2.7	Audio signals	(See Clause E.1)	N/A
5.3	**Protection against electrical energy sources**		N/A
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		N/A
5.3.1 a)	ES2/ES3 circuits that are not ES2/ES3 mains		N/A
5.3.1 b)	Skilled persons not unintentional contact ES3 bare conductors		N/A
5.3.2.1	Accessibility to electrical energy sources and safeguards		N/A
	Accessibility to outdoor equipment bare parts		N/A
5.3.2.2	Contact requirements		N/A
	Test with test probe from Annex V..... :		—
5.3.2.2 a)	Air gap – electric strength test potential (V)..... :	(See appended table 5.4.9)	N/A
5.3.2.2 b)	Air gap – distance (mm) ..... :		N/A
5.3.2.3	Compliance		N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	**Insulation materials and requirements**		N/A
5.4.1.2	Properties of insulating material		N/A
5.4.1.3	Compliance		N/A
	Non-hygroscopic materials		N/A
5.4.1.4	Maximum operating temperature for insulating materials ..... :	(See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	N/A
5.4.1.5	Pollution degrees..... :		—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling test		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage ..... :	(See appended table 5.4.1.8)	N/A
5.4.1.9	Insulating surfaces		N/A
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		N/A
5.4.1.10.2	Vicat test ..... :	(See appended table 5.4.1.10.2)	N/A
5.4.1.10.3	Ball pressure test..... :	(See appended table 5.4.1.10.3)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.4.2	Clearances		N/A
5.4.2.1	General requirements		N/A
	Clearances in circuits connected to AC Mains, Alternative method	(See Annex X)	N/A
5.4.2.2	Procedure 1 for determining clearance		N/A
	Temporary overvoltage ..... :		—
5.4.2.3	Procedure 2 for determining clearance		N/A
5.4.2.3.2.2	AC mains transient voltages ..... :		—
5.4.2.3.2.3	DC mains transient voltages ..... :		—
5.4.2.3.2.4	External circuit transient voltages ..... :		—
5.4.2.3.2.5	Transient voltage determined by measurement..... :		—
5.4.2.3.3	Exceptions of determining required withstand voltage ..... :		N/A
5.4.2.3.4	Determining clearances using required withstand voltage ..... :	(See appended table 5.4.2, 5.4.3)	N/A
5.4.2.4	Determining the adequacy of a clearance using an electric strength test ..... :	(See appended table 5.4.2, 5.4.3)	N/A
5.4.2.5	Multiplication factors for clearances and test voltages..... :		—
5.4.2.6	Clearance measurement..... :	(See appended table 5.4.2, 5.4.3)	N/A
5.4.3	Creepage distances		N/A
5.4.3.1	General		N/A
5.4.3.3	Material group and CTI..... :		—
5.4.3.4	Creepage distances measurement..... :	(See appended table 5.4.2, 5.4.3)	N/A
5.4.4	Solid insulation		N/A
5.4.4.1	General requirements		N/A
5.4.4.2	Minimum distance through insulation ..... :	(See appended table 5.4.4.2)	N/A
5.4.4.3	Insulating compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Insulating compound forming cemented joints		N/A
5.4.4.6	Thin sheet material		N/A
5.4.4.6.1	General requirements		N/A
5.4.4.6.2	Separable thin sheet material	(See appended table 5.4.9)	N/A
	Number of layers (pcs) ..... :		N/A
5.4.4.6.3	Non-separable thin sheet material		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Number of layers (pcs) ..... :		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material ..... :	(See appended table 5.4.9)	N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz, E_P, K_R, d, V_{PW} (V) ..... :	(See appended table 5.4.4.9)	N/A
	Alternative by electric strength test, tested voltage (V), K_R ..... :	(See appended tables 5.4.4.9 and 5.4.9)	N/A
5.4.5	Antenna terminal insulation		N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
5.4.5.3	Insulation resistance (MΩ) ..... :		N/A
	Electric strength test ..... :	(See appended table 5.4.9)	N/A
5.4.6	Insulation of internal wire as part of supplementary safeguard		N/A
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning		N/A
	Relative humidity (%), temperature (°C), duration (h) ..... :		—
5.4.9	Electric strength test	(See appended table 5.4.9)	N/A
5.4.10	Safeguards against transient voltages from external circuits		N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test ..... :		N/A
5.4.10.2.3	Steady-state test..... :	(See appended table 5.4.9)	N/A
5.4.10.3	Verification for insulation breakdown..... :		N/A
5.4.11	Separation between external circuits and earth		N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Surge suppressors bridge separation between external circuit and earth		N/A
	Rated operating voltage U_{op} (V)..... :		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Nominal voltage U_{peak} (V)..... :		—
	Max increase due to variation ΔU_{sp} ..... :		—
	Max increase due to ageing ΔU_{sa} ..... :		—
5.4.11.3	Test method and compliance ..... :	(See appended table 5.4.9)	N/A
	Test voltage (V) of additional test..... :		—
	Measured current (mA) of additional test ..... :		N/A
5.4.12	Insulating liquid		N/A
5.4.12.1	General requirements		N/A
5.4.12.2	Electric strength of an insulating liquid ..... :	(See appended table 5.4.9)	N/A
5.4.12.3	Compatibility of an insulating liquid		N/A
	Thermal classification of IEC 60085..... :		—
5.4.12.4	Container for insulating liquid		N/A
5.5	**Components as safeguards**		N/A
5.5.1	General		N/A
5.5.2	Capacitors and RC units		N/A
5.5.2.1	General requirement		N/A
5.5.2.2	Capacitor discharge after disconnection of a connector..... :	(See appended table 5.5.2.2)	N/A
5.5.3	Transformers	(See Clause G.5.3)	N/A
5.5.4	Optocouplers	(See Clause 5.4 or Clause G.12)	N/A
5.5.5	Relays	(See Clause 5.4)	N/A
5.5.6	Resistors	(See Clause G.10)	N/A
	Application type of resistors ..... :		—
5.5.7	Surge suppressors	(See Clause G.8)	N/A
	GDT……..:		N/A
5.5.8	Insulation between the mains and an external circuit consisting of a coaxial cable ..... :		N/A
	Insulation resistance (MΩ) ..... :		N/A
	Electric strength test..... :	(See appended table 5.4.9)	N/A
5.5.9	Safeguards for socket-outlets in outdoor equipment		N/A
	RCD rated residual operating current (mA)..... :		—
5.6	**Protective conductor**		N/A
5.6.2	Requirements for protective conductors		N/A
5.6.2.1	General requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirements for protective earthing conductors		N/A
	Protective earthing conductor size (mm^2) ..... :		—
	Protective earthing conductor serving as a reinforced safeguard		N/A
	Protective earthing conductor serving as a double safeguard		N/A
5.6.4	Requirements for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm^2). ..... :		—
5.6.4.2	Protective current rating (A) ..... :		—
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Terminal size for connecting protective earthing conductors (mm)..... :		N/A
	Terminal size for connecting protective bonding conductors (mm)..... :		N/A
	Relevant IEC standard ..... :		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective bonding system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test method..... :	(See appended table 5.6.6)	N/A
5.6.6.3	Resistance (Ω) or voltage drop ..... :	(See appended table 5.6.6)	N/A
5.6.7	Reliable connection of a protective earthing conductor		N/A
5.6.8	Functional earthing		N/A
	Conductor size (mm^2) ..... :		N/A
	Class II with functional earthing marking ..... :		N/A
	Appliance inlet cl & cr (mm)..... :		N/A
5.7	**Prospective touch voltage, touch current and protective conductor current**		N/A
5.7.2	Measuring devices and networks		N/A
5.7.2.1	Measurement of touch current		N/A
5.7.2.2	Measurement of voltage		N/A
5.7.3	Equipment set-up, supply connections and earth connections		N/A
5.7.4	Unearthed accessible parts..... :	(See appended table 5.7.4)	N/A
5.7.5	Earthed accessible conductive parts..... :	(See appended table 5.7.5)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.7.6	Requirements when touch current exceeds ES2 limits		N/A
	Protective conductor current (mA)..... :		N/A
	Instructional Safeguard ..... :		N/A
5.7.7	Prospective touch voltage and touch current associated with external circuits		N/A
5.7.7.1	Touch current from coaxial cables		N/A
5.7.7.2	Prospective touch voltage and touch current associated with paired conductor cables		N/A
5.7.8	Summation of touch currents from external circuits		N/A
	a) Equipment connected to an earthed external circuit, current (mA) ..... :		N/A
	b) Equipment connected to an unearthed external circuit, current (mA) ..... :		N/A
5.8	**Backfeed safeguard in battery backed up supplies**		N/A
	Mains terminal ES ..... :	(See appended table 5.8)	N/A
	Air gap (mm)..... :	(See appended table 5.4.2, 5.4.3)	N/A
6	**ELECTRICALLY- CAUSED FIRE**		P
6.2	**Classification of power sources and potential ignition sources**		P
6.2.2	Power source circuit classifications ..... :	(See appended table 6.2.2)	P
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS ..... :	(See appended table 6.2.3.1)	N/A
6.2.3.2	Resistive PIS ..... :	(See appended table 6.2.3.2)	P
6.3	**Safeguards against fire under normal operating and abnormal operating conditions**		P
6.3.1	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials ..... :	(See appended table 5.4.1.4, 9.3, B.1.5 and B.2.6)	P
	Combustible materials not inside a fire enclosure.... :		N/A
6.4	**Safeguards against fire under single fault conditions**		P
6.4.1	Safeguard method..... :	The method “control fire spread” used	—
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits		N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	Supplementary safeguards		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.3.2	Single fault conditions ..... :	(See appended table B.4)	N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		N/A
6.4.5	Control of fire spread in PS2 circuits	- Printed boards made of V-0 class material. - Metal enclosure used.	P
6.4.5.2	Supplementary safeguards		N/A
6.4.6	Control of fire spread in PS3 circuits		N/A
6.4.7	Separation of combustible materials from a PIS		N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers		P
6.4.8.2	Fire enclosure and fire barrier material properties		P
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure	Metal enclosure used.	P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings	No such openings.	P
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top openings and properties		N/A
	Openings dimensions (mm) ..... :		N/A
	Flammability tests for the top of a fire enclosure	(See Clause S.2)	N/A
6.4.8.3.4	Bottom openings and properties		N/A
	Openings dimensions (mm) ..... :		N/A
	Flammability tests for the bottom of a fire enclosure	(See Clause S.3)	N/A
	Instructional Safeguard ..... :		N/A
6.4.8.3.5	Side openings and properties		N/A
	Openings dimensions (mm) ..... :		N/A
6.4.8.3.6	Integrity of a fire enclosure, condition met: a), b) or c)..... :		N/A
6.4.8.4	Separation of a PIS from a fire enclosure and a fire barrier distance (mm) or flammability rating..... :		N/A
6.4.9	Flammability of insulating liquid		N/A
	Auto ignition temperature (°C)..... :		N/A
	Flashpoint temperature (°C)..... :		N/A
6.5	**Internal and external wiring**		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.5.1	General requirements		N/A
6.5.2	Requirements for interconnection to building wiring ..... :		N/A
6.5.3	Internal wiring size (mm^2) for socket-outlets ..... :		N/A
6.6	**Safeguards against fire due to the connection to additional equipment**		P
7	**INJURY CAUSED BY HAZARDOUS SUBSTANCES**		N/A
7.2	**Reduction of exposure to hazardous substances**		N/A
7.3	**Ozone exposure**		N/A
7.4	**Use of personal safeguards or personal protective equipment (PPE)**		N/A
	Personal safeguards and instructions ..... :		—
7.5	**Use of instructional safeguards and instructions**		N/A
	Instructional safeguard (ISO 7010) ..... :		—
8	**MECHANICALLY-CAUSED INJURY**		P
8.2	**Mechanical energy source classifications**		P
8.3	**Safeguards against mechanical energy sources**		P
8.4	**Safeguards against parts with sharp edges and corners**		P
8.4.1	Requirements		P
	Instructional Safeguard ..... :		P
8.4.2	Compliance criteria	No sharp edges and corners.	P
8.5	**Safeguards against moving parts**		N/A
8.5.1	Requirements	No moving part	N/A
	Fingers, jewellery, clothing, hair, etc., contact with MS2 or MS3 parts		N/A
	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
	A manually activated stopping device for moving MS3		N/A
	Moving MS3 parts only accessible to skilled person		N/A
8.5.2	Instructional safeguard ..... :		N/A
8.5.4	Special categories of equipment containing moving parts		N/A
8.5.4.1	General		N/A
8.5.4.2	Equipment containing work cells with MS3 parts		N/A
8.5.4.2.1	Protection of persons in the work cell		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.5.4.2.2	Access protection override		N/A
8.5.4.2.2.1	Override system		N/A
8.5.4.2.2.2	Visual indicator		N/A
8.5.4.2.3	Emergency stop system		N/A
	Maximum stopping distance from the point of activation (m) ..... :		N/A
	Space between end point and nearest fixed mechanical part (mm)..... :		N/A
8.5.4.2.4	Endurance requirements		N/A
	Mechanical system subjected to 100 000 cycles of operation		N/A
	- Mechanical function check and visual inspection		N/A
	- Cable assembly..... :		N/A
8.5.4.3	Equipment having electromechanical device for destruction of media		N/A
8.5.4.3.1	Equipment safeguards		N/A
8.5.4.3.2	Instructional safeguards against moving parts ..... :		N/A
8.5.4.3.3	Disconnection from the supply		N/A
8.5.4.3.4	Cut type and test force (N) ..... :		N/A
8.5.4.3.5	Compliance		N/A
8.5.5	High pressure lamps		N/A
	Explosion test ..... :		N/A
8.5.5.3	Glass particles dimensions (mm)..... :		N/A
8.6	**Stability of equipment**		N/A
8.6.1	Requirements	No stability requirements for MS1 equipment with mass ≤ 7 kg	N/A
	Instructional safeguard for MS2 and MS3 television sets..... :		N/A
8.6.2	Static stability		N/A
8.6.2.2	Static stability test..... :		N/A
8.6.2.3	Downward force test		N/A
8.6.3	Relocation stability		N/A
	Wheels diameter (mm)..... :		—
	Tilt test		N/A
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.7	**Equipment mounted to wall, ceiling or other structure**		N/A
8.7.1	Requirements		N/A
	Mount means type ..... :		N/A
8.7.2	Test methods		N/A
	Test 1, additional downwards force (N) ..... :		N/A
	Horizontal force to a wall or another structure		N/A
	Test 2, number of attachment points and test force (N) ..... :		N/A
	Test 3, nominal diameter (mm) and applied torque (Nm) ..... :		N/A
8.8	**Handles strength**		N/A
8.8.1	General		N/A
8.8.2	Handle strength test		N/A
	Number of handles ..... :		—
	Weight applied (kg)..... :		—
8.9	**Wheels or casters attachment requirements**		N/A
8.9.2	Pull test		N/A
8.10	**Carts, stands and similar carriers**		N/A
8.10.1	General		N/A
8.10.2	Marking and instructions ..... :		N/A
8.10.3	Cart, stand or carrier loading test		N/A
	Loading force applied (N)..... :		N/A
8.10.4	Cart, stand or carrier impact test	(See Clause T.6)	N/A
	Loading force applied (N) on each supporting surface ..... :		N/A
8.10.5	Mechanical stability		N/A
	Force applied (N)..... :		N/A
8.10.6	Thermoplastic temperature stability	(See Clause T.8)	N/A
8.11	**Mounting means for slide-rail mounted equipment (SRME)**		N/A
8.11.1	General		N/A
8.11.2	Requirements		N/A
	Instructional Safeguard ..... :		N/A
8.11.3	Mechanical strength test		N/A
8.11.3.1	Downward force test, force applied (N) ..... :		N/A
8.11.3.2	Lateral push force test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.11.3.3	Integrity of slide rail end stops		N/A
8.11.4	Compliance criteria		N/A
8.12	**Telescoping or rod antennas**		N/A
	No sharp edges or points		N/A
	Button/ball diameter (mm)..... :		N/A
9	**THERMAL BURN INJURY**		P
9.2	**Thermal energy source classifications**		P
9.3	**Touch temperature limits**		P
9.3.1	Touch temperatures of accessible parts..... :	All accessible surfaces are classified as TS1 (See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	P
9.3.2	Test method and compliance		P
9.4	**Safeguards against thermal energy sources**		N/A
9.5	**Requirements for safeguards**		N/A
9.5.1	Equipment safeguard		N/A
9.5.2	Instructional safeguard..... :		N/A
9.6	**Requirements for wireless power transmitters**		N/A
9.6.1	General		N/A
9.6.2	Specification of the foreign objects		N/A
9.6.3	Test method and compliance criteria..... :	(See appended table 9.6)	N/A
10	**RADIATION**		P
10.2	**Radiation energy source classifications**		P
10.2.1	General classification		P
	Lasers..... :	Class 1 laser product.	—
	Lamps and lamp systems..... :		—
	Image projectors..... :		—
	X-Ray..... :		—
	Personal music player ..... :		—
10.3	**Safeguards against laser radiation**		P
	The standard(s) equipment containing laser(s) comply..... :	Comply with IEC 60825-1.	P
10.4	**Safeguards against optical radiation from lamps and lamp systems (including LED types)**		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
10.4.1	General requirements		N/A
	Instructional safeguard provided for accessible radiation level needs to exceed		N/A
	Risk group marking and location ..... :		N/A
	Information for safe operation and installation		N/A
10.4.2	Requirements for equipment safeguards		N/A
	UV radiation exposure..... :	(See Annex C)	N/A
10.4.3	Instructional safeguard ..... :		N/A
10.5	**Safeguards against X-radiation**		N/A
10.5.1	Requirements		N/A
	Instructional safeguard for skilled persons..... :		N/A
10.5.3	Maximum radiation (pA/kg) ..... :	(See appended tables B.3 & B.4)	N/A
10.6	**Safeguards against acoustic energy sources**		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output $L_{Aeq,T}$, dB(A) ..... :		N/A
	Unweighted RMS output voltage (mV) ..... :		N/A
	Digital output signal (dBFS) ..... :		N/A
10.6.3	Requirements for dose-based systems		N/A
10.6.3.1	General requirements		N/A
10.6.3.2	Dose-based warning and automatic decrease		N/A
10.6.3.3	Exposure-based warning and requirements		N/A
	30 s integrated exposure level (MEL30)..... :		N/A
	Warning for MEL ≥ 100 dB(A)..... :		N/A
10.6.4	Measurement methods		N/A
10.6.5	Protection of persons		N/A
	Instructional safeguards ..... :		N/A
10.6.6	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.6.1	Corded listening devices with analogue input		N/A
	Listening device input voltage (mV) ..... :		N/A
10.6.6.2	Corded listening devices with digital input		N/A
	Max. acoustic output $L_{Aeq,T}$, dB(A) ..... :		N/A
10.6.6.3	Cordless listening devices		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Max. acoustic output $L_{Aeq,T}$, dB(A) ..... :		N/A

B	**NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS**		P
B.1	**General**		P
B.1.5	Temperature measurement conditions	(See appended table 5.4.1.4, 9.3, B.1.5, B.2.6)	P
B.1.6	Specific output conditions		N/A
B.2	**Normal operating conditions**		P
B.2.1	General requirements..... :	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment containing an audio amplifiers ..... :	(See Annex E)	N/A
B.2.3	Supply voltage and tolerances		N/A
B.2.5	Input test..... :	(See appended table B.2.5) (See Clause E.3 for audio amplifier)	P
B.2.6.4	Equipment intended for building-in or rack-mounting		N/A
B.3	**Simulated abnormal operating conditions**		N/A
B.3.1	General		N/A
B.3.2	Covering of ventilation openings	(See appended table B.3)	N/A
	Instructional safeguard ..... :		N/A
B.3.3	DC mains polarity test		N/A
B.3.4	Setting of voltage selector		N/A
B.3.5	Maximum load at output terminals		N/A
B.3.6	Reverse battery polarity		N/A
B.3.7	Audio amplifier abnormal operating conditions	(See Clause E.3.2)	N/A
B.3.8	Safeguards functional during and after abnormal operating conditions ..... :	(See appended table B.3, B.4)	N/A
B.4	**Simulated single fault conditions**		P
B.4.1	General	(See appended table B.3, B.4)	P
B.4.2	Temperature controlling device		N/A
B.4.3	Blocked motor test		N/A
B.4.4	Functional insulation	(See appended table B.3, B.4)	P
B.4.4.1	Short circuit of clearances for functional insulation		P

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
B.4.4.2	Short circuit of creepage distances for functional insulation		P
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short-circuit and interruption of electrodes in tubes and semiconductors		P
B.4.6	Short circuit or disconnection of passive components		N/A
B.4.7	Continuous operation of components		N/A
B.4.8	Compliance criteria during and after single fault conditions ..... :	(See appended table B.3, B.4)	P
B.4.9	Battery charging and discharging under single fault conditions	(See Annex M)	N/A
C	**UV RADIATION**		N/A
C.1	**Protection of materials in equipment from UV radiation**		N/A
C.1.2	Requirements		N/A
C.1.3	Test method and compliance criteria		N/A
C.2	**UV light conditioning test**		N/A
C.2.1	Test apparatus..... :		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure test		N/A
C.2.4	Xenon-arc light-exposure test		N/A
D	**TEST GENERATORS**		N/A
D.1	**Impulse test generators**		N/A
D.2	**Antenna interface test generator**		N/A
D.3	**Electronic pulse generator**		N/A
E	**TEST CONDITIONS FOR EQUIPMENT INTENDED TO AMPLIFY AUDIO SIGNALS**		N/A
E.1	**Electrical energy source classification for audio signals**		N/A
	Maximum non-clipped output power (W) ..... :		—
	Rated load impedance (Ω) ..... :		—
	Open-circuit output voltage (V)..... :		—
	Instructional safeguard ..... :		—
E.2	**Audio signals used during test**		N/A
E.2.1	Pink noise test signal		N/A
E.2.2	Sine-wave signal		N/A
E.3	**Operating conditions of equipment containing an audio amplifier**		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
E.3.1	Normal operating conditions	(See appended table B.2.5, E.3.1)	N/A
E.3.2	Abnormal operating conditions	(See appended table B.3, B.4)	N/A
E.3.3	Audio equipment temperature measurement conditions……:		N/A
F	**EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS**		P
F.1	**General**		P
	Language ..... :	English	—
F.2	**Letter symbols and graphical symbols**		P
F.2.1	Letter symbols according to IEC 60027-1		N/A
F.2.2	Graphic symbols according to IEC, ISO or manufacturer specific		P
F.3	**Equipment markings**		P
F.3.1	Equipment marking locations	The equipment marking is provided and is readily visible in operator access area	P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification ..... :	See copy of marking plate.	P
F.3.2.2	Model identification ..... :	See copy of marking plate.	P
F.3.3	Equipment rating markings		P
F.3.3.1	Equipment with direct connection to mains		N/A
F.3.3.2	Equipment without direct connection to mains		P
F.3.3.3	Nature of the supply voltage..... :	See copy of marking plate.	P
F.3.3.4	Rated voltage ..... :	See copy of marking plate.	P
F.3.3.5	Rated frequency ..... :		N/A
F.3.3.6	Rated current or rated power ..... :	See copy of marking plate.	P
F.3.3.7	Equipment with multiple supply connections		N/A
F.3.4	Voltage setting device		N/A
F.3.5	Markings on terminals and operating devices		N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings :		N/A
F.3.5.2	Switch position identification marking..... :		N/A
F.3.5.3	Replacement fuse identification and rating markings ..... :		N/A
	Instructional safeguards for neutral fuse ..... :		N/A
F.3.5.4	Replacement battery identification marking ..... :	(See Clause M.10)	N/A
F.3.5.5	Neutral conductor terminal		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.5.6	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		N/A
F.3.6.1	Class I equipment		N/A
F.3.6.1.1	Protective earthing conductor terminal..... :		N/A
F.3.6.1.2	Protective bonding conductor terminals ..... :		N/A
F.3.6.2	Equipment class marking ..... :		N/A
F.3.6.3	Functional earthing terminal marking ..... :		N/A
F.3.7	Equipment IP rating marking..... :		N/A
F.3.8	External power supply unit output marking ..... :		N/A
F.3.9	Durability, legibility and permanence of markings		P
F.3.10	Test for permanence of markings		P
F.4	**Instructions**		P
	– Information prior to installation and initial use		P
	– Equipment for use in locations where children not likely to be present	This equipment is not suitable for use in locations where children are likely to be present.	P
	– Instructions for installation and interconnection		P
	– Equipment intended for use only in restricted access area		N/A
	– Equipment intended to be fastened in place		N/A
	– Instructions for audio equipment terminals		N/A
	– Protective earthing used as a safeguard		N/A
	– Protective conductor current exceeding ES2 limits		N/A
	– Graphic symbols used on equipment	Not used as instructional safeguard	N/A
	– Permanently connected equipment not provided with all-pole mains switch		N/A
	– Replaceable components or modules providing safeguard function		N/A
	– Equipment containing insulating liquid		N/A
	– Installation instructions for outdoor equipment		N/A
F.5	Instructional safeguards		P
G	**COMPONENTS**		P
G.1	**Switches**		N/A
G.1.1	General		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.1.3	Test method and compliance criteria		N/A
G.2	**Relays**		N/A
G.2.1	Requirements and compliance criteria		N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supplying power to other equipment		N/A
G.2.4	Test method and compliance criteria		N/A
G.3	**Protective devices**		N/A
G.3.1	Thermal cut-offs		N/A
	Thermal cut-outs separately approved according to IEC 60730-1 with conditions indicated in a) & b)		N/A
	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Test method and compliance criteria		N/A
G.3.2	Thermal links		N/A
G.3.2.1	a) Thermal links tested separately according to IEC 60691 with specifics		N/A
	b) Thermal links tested as part of the equipment		N/A
G.3.2.2	Test method and compliance criteria		N/A
G.3.3	PTC thermistors		N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.4		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions..... :	(See appended table B.3, B.4)	N/A
G.4	**Connectors**		N/A
G.4.1	Spacings		N/A
G.4.2	Mains connectors configuration..... :		N/A
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
G.5	**Wound components**		N/A
G.5.1	Wire insulation in wound components		N/A
G.5.1.2	Protection against mechanical stress		N/A
G.5.2	Endurance test		N/A
G.5.2.1	General test requirements		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.5.2.2	Heat run test		N/A
	Test time (days per cycle) ..... :		—
	Test temperature (°C)..... :		—
G.5.2.3	Wound components supplied from the mains		N/A
G.5.2.4	Compliance criteria		N/A
G.5.3	Transformers		N/A
G.5.3.1	General		N/A
	Compliance method..... :		N/A
G.5.3.2	Insulation		N/A
	Protection from displacement of windings..... :		—
G.5.3.3	Transformer overload tests		N/A
G.5.3.3.1	Test conditions		N/A
	Position ..... :		N/A
	Method of protection..... :		N/A
G.5.3.3.2	Winding temperatures		N/A
G.5.3.3.3	Winding temperatures - alternative test method		N/A
G.5.3.4	Transformers using FIW		N/A
G.5.3.4.1	General		N/A
	FIW wire nominal diameter..... :		—
G.5.3.4.2	Transformers with basic insulation only		N/A
G.5.3.4.3	Transformers with double insulation or reinforced insulation ..... :		N/A
G.5.3.4.4	Transformers with FIW wound on metal or ferrite core		N/A
G.5.3.4.5	Thermal cycling test and compliance		N/A
G.5.3.4.6	Partial discharge test		N/A
G.5.4	Motors		N/A
G.5.4.1	General requirements		N/A
G.5.4.2	Motor overload test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days) ..... :		—
	Electric strength test..... :	(See appended table 5.4.9)	N/A
G.5.4.5	Running overload test for DC motors		N/A
G.5.4.5.2	Tested in the unit		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Electric strength test ..... :	(See appended table 5.4.9)	N/A
G.5.4.5.3	Alternative method		N/A
	Electric strength test ..... :	(See appended table 5.4.9)	N/A
G.5.4.6	Locked-rotor overload test for DC motors		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature (°C) ..... :		N/A
	Electric strength test ..... :	(See appended table 5.4.9)	N/A
G.5.4.6.3	Alternative method		N/A
	Electric strength test ..... :	(See appended table 5.4.9)	N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage (V) ..... :		—
G.6	**Wire Insulation**		N/A
G.6.1	General		N/A
G.6.2	Enamelled winding wire insulation		N/A
G.7	**Mains power supply cords and interconnection cables**		N/A
G.7.1	General requirements		N/A
	Type ..... :		—
G.7.2	Cross sectional area (mm^2 or AWG) ..... :		N/A
G.7.3	Cord anchorages and strain relief		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N) ..... :		N/A
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm) ..... :		N/A
G.7.3.2.4	Strain relief and cord anchorage material		N/A
G.7.4	Cord Entry		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Test method and compliance criteria		N/A
	Overall diameter or minor overall dimension, *D* (mm) ..... :		—
	Radius of curvature after test (mm) ..... :		—
G.7.6	Supply wiring space		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.6.1	General requirements		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Requirements		N/A
G.7.6.2.2	Test with 8 mm strand		N/A
G.8	**Varistors**		N/A
G.8.1	General requirements		N/A
G.8.2	Safeguards against fire		N/A
G.8.2.1	General		N/A
G.8.2.2	Varistor overload test		N/A
G.8.2.3	Temporary overvoltage test		N/A
G.9	**Integrated circuit (IC) current limiters**		N/A
G.9.1	Requirements		N/A
	IC limiter output current (max. 5A) ..... :		—
	Manufacturers' defined drift ..... :		—
G.9.2	Test Program		N/A
G.9.3	Compliance criteria		N/A
G.10	**Resistors**		N/A
G.10.1	General		N/A
G.10.2	Conditioning		N/A
G.10.3	Resistor test		N/A
	Changes of resistance (%) ..... :		N/A
	Measured current with the lowest resistance value :		N/A
G.10.4	Voltage surge test		N/A
	Changes of resistance (%) ..... :		N/A
G.10.5	Impulse test		N/A
	Changes of resistance (%) ..... :		N/A
G.10.6	Overload test		N/A
	Changes of resistance (%) ..... :		N/A
G.11	**Capacitors and RC units**		N/A
G.11.1	General requirements		N/A
G.11.2	Conditioning of capacitors and RC units		N/A
G.11.3	Rules for selecting capacitors		N/A
G.12	**Optocouplers**		N/A
	Optocouplers comply with IEC 60747-5-5 with specifics		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Type test voltage $V_{ini,a}$ ..... :		—
	Routine test voltage, $V_{ini,b}$ ..... :		—
G.13	**Printed boards**		P
G.13.1	General requirements		P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation ..... :		N/A
	Number of insulation layers (pcs) ..... :		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2	Test method and compliance criteria		N/A
G.14	**Coating on components terminals**		N/A
G.14.1	Requirements ..... :	(See Clause G.13)	N/A
G.15	**Pressurized liquid filled components or LFC assemblies**		N/A
G.15.1	Requirements		N/A
G.15.2	Test methods and compliance criteria for self-contained LFC		N/A
G.15.2.1	Hydrostatic pressure test, applied test pressure .... :		N/A
G.15.2.2	Creep resistance test		N/A
G.15.2.3	Tubing and fittings compatibility test, the change of tensile strength (%)..... :		N/A
G.15.2.4	Vibration test		N/A
G.15.2.5	Thermal cycling test, test temperature (°C)..... :		N/A
G.15.2.6	Force test		N/A
G.15.2.7	Compliance criteria		N/A
G.15.3	Test methods and compliance for a modular LFC		N/A
G.15.3.2	Hydrostatic pressure test, applied test pressure .... :		N/A
G.15.3.3	Creep resistance test		N/A
G.15.3.4	Tubing and fittings compatibility test, the change of tensile strength (%)..... :		N/A
G.15.3.5	Thermal cycle test, test temperature (°C) ..... :		N/A
G.15.3.6	Force test		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
G.15.3.7	Compliance criteria		N/A
G.16	**IC including capacitor discharge function (ICX)**		N/A
G.16.1	Condition for fault tested is not required		N/A
	ICX with associated circuitry tested in equipment		N/A
	ICX tested separately		N/A
G.16.2	Tests		N/A
	Smallest capacitance and smallest resistance specified by ICX manufacturer for impulse test..... :		—
	Mains voltage that impulses to be superimposed on..... :		—
	Largest capacitance and smallest resistance for ICX tested by itself for 10000 cycles test ..... :		—
G.16.3	Capacitor discharge test..... :	(See appended table 5.5.2.2)	N/A
H	**CRITERIA FOR TELEPHONE RINGING SIGNALS**		N/A
H.1	**General**		N/A
H.2	**Method A**		N/A
H.3	**Method B**		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz) ..... :		—
H.3.1.2	Voltage (V) ..... :		—
H.3.1.3	Cadence; time (s) and voltage (V) ..... :		—
H.3.1.4	Single fault condition current (mA): ..... :		—
H.3.2	Tripping device and monitoring voltage		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V) ..... :		N/A
J	**INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION**		N/A
J.1	**General**		N/A
	Winding wire insulation..... :		—
	Solid round winding wire, diameter (mm)..... :		N/A
	Solid square and rectangular (flatwise bending) winding wire, cross-sectional area (mm^2)..... :		N/A
J.2/J.3	Tests and Manufacturing	(See separate test report)	—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
K	**SAFETY INTERLOCKS**		N/A
K.1	**General requirements**		N/A
	Instructional safeguard ..... :		N/A
K.2	**Components of safety interlock safeguard mechanism**		N/A
K.3	**Inadvertent change of operating mode**		N/A
K.4	**Interlock safeguard override**		N/A
K.5	**Fail-safe**		N/A
K.5.1	Under single fault condition		N/A
K.6	**Mechanically operated safety interlocks**		N/A
K.6.1	Endurance requirement		N/A
K.7	**Interlock circuit isolation**		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements		N/A
	In circuit connected to mains, separation distance for contact gaps (mm)..... :		N/A
	In circuit isolated from mains, separation distance for contact gaps (mm)..... :		N/A
	Electric strength test before and after the test of K.7.2 ..... :	(See appended table 5.4.9)	N/A
K.7.2	Overload test, Current (A) ..... :		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test	(See appended table 5.4.9)	N/A
L	**DISCONNECT DEVICES**		N/A
L.1	**General requirements**		N/A
L.2	**Permanently connected equipment**		N/A
	Instructions for permanently connected equipment		N/A
L.3	**Parts that remain energized**		N/A
L.4	**Single-phase equipment**		N/A
	Instructions for single pole disconnect device		N/A
L.5	**Three-phase equipment**		N/A
L.6	**Switches as disconnect devices**		N/A
L.7	**Plugs as disconnect devices**		N/A
	Instructions for pluggable equipment		—
L.8	**Multiple power sources**		N/A
	Instructional safeguard ..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M	**EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS**		N/A
M.1	**General requirements**		N/A
M.2	**Safety of batteries and their cells**		N/A
M.2.1	Batteries and their cells comply with relevant IEC standards..... :	See appended table 4.1.2	N/A
M.3	**Protection circuits for batteries provided within the equipment**		N/A
M.3.1	Requirements		N/A
M.3.2	Test method		N/A
	Overcharging of a rechargeable battery		N/A
	Excessive discharging		N/A
	Unintentional charging of a non-rechargeable battery		N/A
	Reverse charging of a rechargeable battery		N/A
M.3.3	Compliance criteria	(See appended table M.3)	N/A
M.4	**Additional safeguards for equipment containing a secondary lithium battery**		N/A
M.4.1	General		N/A
	IEC 62133-2 batteries used for sub-system power powering application..... :		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Requirements		N/A
M.4.2.2	Test		N/A
M.4.2.2.1	General		N/A
M.4.2.2.2	Abnormal operating conditions		N/A
M.4.2.2.3	Single fault conditions		N/A
M.4.2.3	Compliance criteria..... :	(See appended table M.4.2)	N/A
M.4.3	Fire enclosure..... :		N/A
M.4.4	Drop test of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation and procedure for the drop test		N/A
M.4.4.3	Drop, Voltage on reference and dropped batteries (V); voltage difference during 24 h period (%): ..... :		N/A
M.4.4.4	Check of the charge/discharge function		N/A
M.4.4.5	Charge / discharge cycle test		N/A
M.4.4.6	Compliance criteria		N/A
M.5	**Risk of burn due to short-circuit during carrying**		N/A
M.5.1	Requirement		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
M.5.2	Test method and compliance criteria		N/A
M.6	**Safeguards against short-circuits**		N/A
M.6.1	External and internal faults		N/A
M.6.2	Compliance criteria		N/A
M.7	**Risk of explosion from lead acid and NiCd batteries**		N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
	Calculated hydrogen generation rate ..... :		N/A
M.7.2	Test method and compliance criteria		N/A
	Minimum air flow rate, Q (m^3/h)..... :		N/A
M.7.3	Ventilation tests		N/A
M.7.3.1	General		N/A
M.7.3.2	Ventilation test – alternative 1		N/A
	Hydrogen gas concentration (%)..... :		N/A
M.7.3.3	Ventilation test – alternative 2		N/A
	Obtained hydrogen generation rate..... :		N/A
M.7.3.4	Ventilation test – alternative 3		N/A
	Hydrogen gas concentration (%)..... :		N/A
M.7.4	Marking..... :		N/A
M.8	**Protection against internal ignition from external spark sources of rechargeable batteries with aqueous electrolyte**		N/A
M.8.1	General		N/A
M.8.2	Test method		N/A
M.8.2.1	General		N/A
M.8.2.2	Estimation of hypothetical volume V_Z (m^3/s) ..... :		—
M.8.2.3	Correction factors ..... :		—
M.8.2.4	Calculation of distance d (mm) ..... :		—
M.9	**Preventing electrolyte spillage**		N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	**Instructions to prevent reasonably foreseeable misuse**		N/A
	Instructional safeguard ..... :		N/A
N	**ELECTROCHEMICAL POTENTIALS**		N/A
	Material(s) used..... :		—

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
O	**MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES**		N/A
	Value of *X* (mm)..... :		—
P	**SAFEGUARDS AGAINST CONDUCTIVE OBJECTS**		N/A
P.1	**General**		N/A
P.2	**Safeguards against entry or consequences of entry of a foreign object**		N/A
P.2.1	General		N/A
	Location and Dimensions (mm) ..... :		—
P.2.2	Safeguard requirements		N/A
	The ES3 and PS3 keep-out volume in Figure P.4 not applicable to transportable equipment		N/A
	Transportable equipment with metalized plastic parts..... :		N/A
P.2.3	Consequence of entry test ..... :		N/A
P.3	**Safeguards against spillage of internal liquids**		N/A
P.3.1	General		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Compliance criteria		N/A
P.4	**Metallized coatings and adhesives securing parts**		N/A
P.4.1	General		N/A
P.4.2	Tests		N/A
	Conditioning, T_C (°C) ..... :		—
	Duration (weeks) ..... :		—
Q	**CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING**		N/A
Q.1	**Limited power sources**		N/A
Q.1.1	Requirements		N/A
	a) Inherently limited output		N/A
	b) Impedance limited output		N/A
	c) Regulating network limited output		N/A
	d) Overcurrent protective device limited output		N/A
	e) IC current limiter complying with G.9		N/A
Q.1.2	Test method and compliance criteria ..... :	(See appended table Q.1)	N/A
	Current rating of overcurrent protective device (A) :		N/A
Q.2	**Test for external circuits – paired conductor cable**		N/A
	Maximum output current (A) ..... :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Current limiting method ..... :		—
R	**LIMITED SHORT CIRCUIT TEST**		N/A
R.1	**General**		N/A
R.2	**Test setup**		N/A
	Overcurrent protective device for test ..... :		—
R.3	**Test method**		N/A
	Cord/cable used for test ..... :		—
R.4	**Compliance criteria**		N/A
S	**TESTS FOR RESISTANCE TO HEAT AND FIRE**		N/A
S.1	**Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W**		N/A
	Samples, material ..... :		—
	Wall thickness (mm) ..... :		—
	Conditioning (°C) ..... :		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	**Flammability test for fire enclosure and fire barrier integrity**		N/A
	Samples, material ..... :		—
	Wall thickness (mm) ..... :		—
	Conditioning (°C) ..... :		—
	- Material did not show any additional holes for combustible materials		N/A
	- Cheesecloth did not ignite for top openings		N/A
S.3	**Flammability test for the bottom of a fire enclosure**		N/A
S.3.1	Mounting of samples		N/A
S.3.2	Test method and compliance criteria		N/A
	Mounting of samples ..... :		—
	Wall thickness (mm) ..... :		—
	Cheesecloth did not ignite		N/A
S.4	**Flammability classification of materials**		N/A
S.5	**Flammability test for fire enclosure materials of equipment with a steady state power exceeding 4 000 W**		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Samples, material ..... :		—
	Wall thickness (mm) ..... :		—
	Conditioning (°C) ..... :		—
S.6	**Grille covering material, cloth, and reticulated foam**		N/A
	Samples, material ..... :		—
	Measured distance from the centre of the fuel tablet (mm)……:		N/A
T	**MECHANICAL STRENGTH TESTS**		P
T.1	**General**		P
T.2	**Steady force test, 10 N ..... :**		N/A
T.3	**Steady force test, 30 N ..... :**		N/A
T.4	**Steady force test, 100 N ..... :**		N/A
T.5	**Steady force test, 250 N ..... :**	(See appended table T.2, T.3, T.4, T.5)	P
T.6	**Enclosure impact test**	(See appended table T.6, T.9)	P
	Fall test		P
	Swing test		P
T.7	**Drop test ..... :**	(See appended table T.7)	N/A
T.8	**Stress relief test..... :**	(See appended table T.8)	N/A
T.9	**Glass Impact Test..... :**	(See appended table T.6, T.9)	N/A
T.10	**Glass fragmentation test**		N/A
	Number of particles counted ..... :		N/A
T.11	**Test for telescoping or rod antennas**		N/A
	Torque value (Nm) ..... :		N/A
U	**MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFFECTS OF IMPLOSION**		N/A
U.1	**General**		N/A
	Instructional safeguard **..... :**		N/A
U.2	**Test method and compliance for non-intrinsically protected CRTs**		N/A
U.3	**Protective screen**		N/A
V	**DETERMINATION OF ACCESSIBLE PARTS**		N/A
V.1	**Accessible parts of equipment**		N/A
V.1.1	General		N/A
V.1.2	Surfaces and openings tested with jointed test probes		N/A
V.1.3	Openings tested with straight unjointed test probes		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
V.1.4	Plugs, jacks, connectors tested with blunt probe		N/A
V.1.5	Slot openings tested with wedge probe		N/A
V.1.6	Terminals tested with rigid test wire		N/A
V.2	**Accessible part criterion**		N/A
X	**ALTERNATIVE METHOD FOR DETERMINING CLEARANCES FOR INSULATION IN CIRCUITS CONNECTED TO AN AC MAINS NOT EXCEEDING 420 V PEAK (300 V RMS)**		N/A
	Clearance..... :	(See appended table X)	N/A
Y	**CONSTRUCTION REQUIREMENTS FOR OUTDOOR ENCLOSURES**		N/A
Y.1	**General**		N/A
Y.2	**Resistance to UV radiation**		N/A
Y.3	**Resistance to corrosion**		N/A
Y.3.1	Metallic parts of outdoor enclosures are resistant to effects of water-borne contaminants by ..... :		N/A
Y.3.2	Test apparatus		N/A
Y.3.3	Water – saturated sulphur dioxide atmosphere		N/A
Y.3.4	Test procedure..... :		N/A
Y.3.5	Compliance criteria		N/A
Y.4	**Gaskets**		N/A
Y.4.1	General		N/A
Y.4.2	Gasket tests		N/A
Y.4.3	Tensile strength and elongation tests, changes of tensile strength and elongation..... :		N/A
	Alternative test methods..... :		N/A
Y.4.4	Compression test		N/A
Y.4.5	Oil resistance, change of swell / shrink (%)..... :		N/A
Y.4.6	Securing means	(See Clause P.4)	N/A
Y.5	**Protection of equipment within an outdoor enclosure**		N/A
Y.5.1	General		N/A
Y.5.2	Protection from moisture		N/A
	Relevant tests of IEC 60529 or Y.5.3..... :		N/A
Y.5.3	Water spray test		N/A
Y.5.4	Protection from plants and vermin		N/A
Y.5.5	Protection from excessive dust		N/A
Y.5.5.1	General		N/A
	Relevant tests of IEC 60529 or Y.5.5.2 or Y.5.5.3 . :		N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Y.5.5.2	IP5X equipment		N/A
Y.5.5.3	IP6X equipment		N/A
Y.6	**Mechanical strength of enclosures**		N/A
Y.6.1	General		N/A
Y.6.2	Impact test ..... :	(See appended table T.6, T.9)	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.2	TABLE: Classification of electrical energy sources						P
Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters				ES Class
			U (V)	I (mA)	Type[1)]	Additional Info [2)]	
24 Vdc	EUT Input	Normal	24 Vdc	--	SS	--	ES1
		Abnormal	--	--	--	--	
		Single fault – SC See appended table B.4	24 Vdc	--	SS	--	
Supplementary information:							
1) Type: Steady state (SS), Capacitance (CP), Single pulse (SP), Repetitive pulses (RP), etc. 2) Additional Info: Frequency, Pulse duration, Pulse off time, Capacitance value, etc.							

5.4.1.8	TABLE: Working voltage measurement			N/A
Location	Peak voltage (V)	RMS voltage (V)	Frequency (Hz)	Comments
Supplementary information:				

5.4.1.10.2	TABLE: Vicat softening temperature of thermoplastics		N/A
Method ..... :	ISO 306 / B50		—
Object/ Part No./Material	Manufacturer/trademark	Thickness (mm)	T softening (°C)
Supplementary information:			

5.4.1.10.3	TABLE: Ball pressure test of thermoplastics				N/A
Allowed impression diameter (mm) ..... :	≤ 2 mm				—
Object/Part No./Material	Manufacturer/trademark	Thickness (mm)	Test temperature (°C)	Impression diameter (mm)	

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:				

5.4.2, 5.4.3	**TABLE: Minimum Clearances/Creepage distance**							N/A
Clearance (cl) and creepage distance (cr) at/of/between:	U_p (V)	U_{rms} (V)	Freq [1)] (Hz)	Required cl (mm)	cl (mm)	E.S. [2)] (V)	Required cr (mm)	cr (mm)
Supplementary information:								
1) Only for frequency above 30 kHz 2) Complete Electric Strength voltage (E.S. (V) when 5.4.2.4 applied)								

5.4.4.2	**TABLE: Minimum distance through insulation**			N/A
Distance through insulation (DTI) at/of	Peak voltage (V)	Insulation	Required DTI (mm)	Measured DTI (mm)
Supplementary information:				

5.4.4.9	**TABLE: Solid insulation at frequencies >30 kHz**					N/A
Insulation material	E_P	Frequency (kHz)	K_R	Thickness d (mm)	Insulation	V_{PW} (Vpk)
Supplementary information:						

5.4.9	**TABLE: Electric strength tests**		N/A
Test voltage applied between:	Voltage shape (Surge, Impulse, AC, DC, etc.)	Test voltage (V)	Breakdown Yes / No
Supplementary information:			

5.5.2.2	**TABLE: Stored discharge on capacitors**	N/A

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

Location	Supply voltage (V)	Operating and fault condition [1)]	Switch position	Measured voltage (Vpk)	ES Class
Supplementary information:					
X-capacitors installed for testing: [ ] bleeding resistor rating: [ ] ICX: 1) Normal operating condition (e.g., normal operation), SC= short circuit, OC= open circuit					

5.6.6	**TABLE: Resistance of protective conductors and terminations**			N/A
Location	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)
Supplementary information:				

5.7.4	**TABLE: Unearthed accessible parts**				N/A
Location	Operating and fault conditions	Supply Voltage (V)	Parameters		ES class
			Voltage (V_{rms} or V_{pk})	Current (A_{rms} or A_{pk})	Freq. (Hz)	
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit						

5.7.5	**TABLE: Earthed accessible conductive part**			N/A
Supply voltage (V).....:				—
Phase(s) .....:	[ ] Single Phase; [ ] Three Phase: [ ] Delta [ ] Wye			
Power Distribution System .....:	[ ] TN [ ]TT [ ] IT			
Location	Fault Condition No in IEC 60990 clause 6.2.2	Touch current (mA)	Comment	
Supplementary Information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

5.8	TABLE: Backfeed safeguard in battery backed up supplies					N/A
Location	Supply voltage (V)	Operating and fault condition	Time (s)	Open-circuit voltage (V)	Touch current (A)	ES Class
Supplementary information:						
Abbreviation: SC= short circuit, OC= open circuit						

6.2.2	TABLE: Power source circuit classifications					P
Location	Operating and fault condition	Voltage (V)	Current (A)	Max. Power[1)] (W)	Time (S)	PS class
EUT input	Normal	--	--	--	--	PS2 (declared)
Supplementary information:						
Abbreviation: SC= short circuit; OC= open circuit 1) Measured after 3 s for PS1 and measured after 5 s for PS2 and PS3. 2) Fault condition see appended table B.4. 3) The external power source output shall be complied with LPS or PS2 circuit.						

6.2.3.1	TABLE: Determination of Arcing PIS			N/A
Location	Open circuit voltage after 3 s (Vpk)	Measured r.m.s current (A)	Calculated value	Arcing PIS? Yes / No
Supplementary information:				

6.2.3.2	TABLE: Determination of resistive PIS		P
Location	Operating and fault condition	Dissipate power (W)	Resistive PIS? Yes / No
All components	--	--	Yes
Supplementary information:			
Abbreviation: SC= short circuit; OC= open circuit			

8.5.5	TABLE: High pressure lamp			N/A
Lamp manufacturer	Lamp type	Explosion method	Longest axis of glass particle (mm)	Particle found beyond 1 m Yes / No

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
Supplementary information:			

9.6	TABLE: Temperature measurements for wireless power transmitters	N/A
Supply voltage (V) .....:		—
Max. transmitting power (W).....:		—

Part A [1)]

Foreign objects	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm	
	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)
Steel disc								
Aluminium ring								
Aluminium foil								
Measurement temperature T of part/at:	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm	
	T (°C)	Ambient (°C)	T (°C)	Ambient (°C)	T (°C)	Ambient (°C)	T (°C)	Ambient (°C)

Part B [2)]

Foreign objects	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm	
	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)	Object (°C)	Ambient (°C)
Steel disc								
Aluminium ring								
Aluminium foil								
Measurement temperature T of part/at:	w/o receiver and direct contact		with receiver and direct contact		with receiver and at distance of 2 mm		with receiver and at distance of 5 mm	
	T (°C)	Ambient (°C)	T (°C)	Ambient (°C)	T (°C)	Ambient (°C)	T (°C)	Ambient (°C)

Supplementary information:

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

1) The test is performed by powering up the transmitter and then placing each of the foreign objects specified in 9.6.2 in direct contact with the transmitter.

2) The test is performed by first placing each of the foreign objects specified in 9.6.2 in direct contact with the transmitter and then powering up transmitter.

5.4.1.4, 9.3, B.1.5, B.2.6	**TABLE: Temperature measurements**	P

Supply voltage (V) ..... :	24Vdc	--	—
Ambient temperature during test T_{amb} (°C) .... :	See below	--	—

Maximum measured temperature *T* of part/at:	*T* (°C)				Allowed T_{max} (°C)
PCB near U1 on sensor board	53.4	104.8	--	--	130
PCB near U5	51.8	103.2	--	--	130
PCB near J3	54.5	105.9	--	--	130
PCB near inductor	53.2	104.6	--	--	130
PCB near U16	51.5	102.9	--	--	130
Ambient	23.6	→75.0	--	--	--
Following for accessible touch temperature:					
External metal enclosure near main board	45.7	47.1	--	--	60 [1)]
Plastic of connector	24.3	25.7	--	--	77 [1)]
LES	45.3	46.7	--	--	71 [1)]
Ambient	23.6	→25.0	--	--	--

Temperature T of winding:	t_1 (°C)	R_1 (Ω)	t_2 (°C)	R_2 (Ω)	T (°C)	Allowed T_{max} (°C)	Insulation class
--	--	--	--	--	--	--	--

Supplementary information:

[1)] touch temperature limit under normal operating conditions for TS1 (>1 s and < 10 s.)

Note 1: Tma should be considered as directed by appliable requirement

Note 2: Tma is not included in assessment of Touch Temperatures (Clause 9)

B.2.5	**TABLE: Input test**							P
U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
24Vdc	--	0.40	3.0	9.60	--	F1	0.40	Normal work

Supplementary information:

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

B.2.5, E.3.1	**TABLE: Input test for equipment containing audio amplifiers**	N/A

Operation Condition:	Signal type	Frequency (Hz)	Output loads (Ω)	Load setup
A1	Sine wave input	1000		All channels driven, (maximum) non-clipped output power
A2	Peak response frequency			All channels driven, (maximum) non-clipped output power
B1	Sine wave input	1000		All channels driven, 1/8 non-clipped output power
B2	Peak response frequency			All channels driven, 1/8 non-clipped output power
C	Band-limited pink noise signal	N/A		All channels driven, 1/8 non-clipped output power
D				

Input									Amplifier Output			
Cond.	U (V)	Hz	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Ch.	U (V)	P (W)	Load (Ω)

Supplementary information:

B.3, B.4	**TABLE: Abnormal operating and fault condition tests**						P
Ambient temperature T_{amb} (°C) ..... :						23.1	—
Power source for EUT: Manufacturer, model/type, outputrating .. :						--	—

Component No.	Condition	Supply voltage (V)	Test time	Fuse no.	Fuse current (A)	Observation
R153	SC	24Vdc	5mins	F1	0.40	Unit normal work, No hazard
D49	SC	24Vdc	5mins	F1	0.40	Unit normal work, No hazard
U14 pin1 to pin2	SC	24Vdc	5mins	F1	0.40	Unit normal work, No hazard
U14 pin1 to pin2	SC	24Vdc	5mins	F1	0.40	Unit normal work, No hazard
D15	SC	24Vdc	5mins	F1	0	Unit shutdown immediately, fuse open, No hazard
C203	SC	24Vdc	5mins	F1	0.40	Unit normal work, No hazard

Supplementary information:

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

The most unfavourable test condition was performed
In fault column, where SC = short-circuited.
NH = No hazard; NB = No indication of dielectric breakdown; NC = Cheesecloth remained intact;
NT = Tissue paper remained intact; NCD = No components damage.

M.3	**TABLE: Protection circuits for batteries provided within the equipment**							N/A
Is it possible to install the battery in a reverse polarity position?.....:								—
Equipment Specification	Charging							
	Voltage (V)			Current (A)				
Manufacturer/type	Battery specification							
	Non-rechargeable batteries		Rechargeable batteries					
	Discharging current (A)	Unintentional charging current (A)	Charging			Discharging current (A)	Reverse charging current (A)	
			Voltage (V)	Current (A)				
Note: The tests of M.3.2 are applicable only when above appropriate data is not available.								
Specified battery temperature (°C) .....:								
Component No.	Fault condition	Charge/ discharge mode	Test time	Temp. (°C)	Current (A)	Voltage (V)	Observation	
Supplementary information:								
Abbreviation: SC= short circuit; OC= open circuit NL= no chemical leakage; NS= no spillage of liquid; NE= no explosion; NF= no emission of flame or expulsion of molten metal.								

M.4.2	**TABLE: Charging safeguards for equipment containing a secondary lithium battery**				N/A
Maximum specified charging voltage (V).....:					—
Maximum specified charging current (A) .....:					—
Highest specified charging temperature (°C) .....:					
Lowest specified charging temperature (°C) .....:					
Battery manufacturer/type	Operating and fault condition	Measurement			Observation
		Charging voltage (V)	Charging current (A)	Temp. (°C)	
Supplementary information:					
Abbreviation: SC= short circuit; OC= open circuit; MSCV= maximum specified charging voltage; MSCC=					

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict
maximum specified charging current; HSCT= highest specified charging temperature; LSCT= lowest specified charging temperature			

Q.1	**TABLE: Circuits intended for interconnection with building wiring (LPS)**						N/A
Output Circuit	Condition	U_{oc} (V)	Time (s)	I_{sc} (A)		S (VA)	
				Meas.	Limit	Meas.	Limit
Supplementary Information:							

T.2, T.3, T.4, T.5	**TABLE: Steady force test**					P
Location/Part	Material	Thickness (mm)	Probe	Force (N)	Test Duration (s)	Observation
Enclosure all side	Metal	Min 2.0mm	--	250	5	No crack. No damage
Supplementary information:						

T.6, T.9	**TABLE: Impact test**			P
Location/Part	Material	Thickness (mm)	Height (mm)	Observation
Enclosure all side	Metal	Min 2.0mm	1300	No crack. No damage
Supplementary information:				

T.7	**TABLE: Drop test**			N/A
Location/Part	Material	Thickness (mm)	Height (mm)	Observation
Supplementary information:				

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

T.8	TABLE: Stress relief test					N/A
Location/Part	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation	
Supplementary information:						

X	TABLE: Alternative method for determining minimum clearances distances		N/A
Clearance distanced between:	Peak of working voltage (V)	Required cl (mm)	Measured cl (mm)
Supplementary information:			

IEC 62368-1			
Clause	Requirement + Test	Result - Remark	Verdict

4.1.2	TABLE: Critical components information				P
Object / part No.	**Manufacturer/ trademark**	**Type / model**	**Technical data**	**Standard**	**Mark(s) of conformity[1)]**
Metal enclosure	--	--	Metal, thickness 2.0mm	IEC/EN/UL/CSA 62368-1	Test with appliance
Fuse (F1)	Littelfuse Inc	0452005.MRL	5A/125VDC	EN/IEC 60127-1 EN/IEC 60127-7	Approved by TÜV Rheinland: J 50515033 003
PCB	Shenzhen Zhong Ke Chuang Da Electronic Co Ltd.	ZKCD-2 ZKCD-M ZKCD-1 ZKCD-D	V-0, 130°C	UL 94	UL E514773
Internal wire	HENAN CARVE ELECTRONICS POLYTRON TECHNOLOGIES INC	KW25101701	PVC 105°C 300V 26AWG	UL 817	UL E475592
VCSEL	Hisilicon Optoelectronics Co., Ltd.	OC1910S	Wavelength: 940 nm	IEC 60825-1: 2014	Test with appliance
Supplementary information: 1) Provided evidence ensures the agreed level of compliance. See OD-2039.					

-- End of main test report --

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT TO TEST REPORT

IEC 62368-1:2023
EUROPEAN GROUP DIFFERENCES AND EUROPEAN NATIONAL DIFFERENCES
(Audio/video, information and communication technology equipment Part 1: Safety requirements)

Differences according to .....: EN IEC 62368-1:2024 + A11:2024

TRF template used..... : IECEE OD-2020-F2:2024, Ed. 2

Attachment Form No. .....: EU_GD_IEC62368_1F

Attachment Originator.....: UL Solutions (Demko)

Master Attachment .....: 2025-08-29

Copyright © 2025 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

Clause	Requirement + Test	Result - Remark	Verdict
	CENELEC COMMON MODIFICATIONS		--
	Clause numbers in the cells that are shaded light grey are clause references in EN IEC 62368-1:2024+A11:2024. All other clause numbers in that column, except for those in the paragraph below, refers to IEC 62368-1:2023. Clauses, subclauses, notes, tables, figures and annexes which are additional to those in IEC 62368-1:2023 are prefixed “Z”.		P
	Add the following annexes: Annex ZA (normative) — Normative references to international publications with their corresponding European publications Annex ZB (normative) — Special national conditions Annex ZC (informative) — A-deviations Annex ZD (informative) — IEC and CENELEC code designations for flexible cords		P

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

1	**MODIFICATION to the whole document**		--
	Delete all the "country" notes in the reference document according to the following list: 0.2.1 Note 1 and Note 2; 1 Note 4 and Note 5; 3.3.8.1 Note 2 3.3.8.3 Note 1; 4.1.15 Note; 4.7.3 Note 1 and Note 2 5.4.2.3.2.2 Table 12 Note c; 5.4.2.3.2.4 Note 1 and Note 3; 5.4.2.3.2.4 Table 13 Note 2 5.4.2.5 Note 2; 5.4.5.1 Note; 5.4.10.2.1 Note 5.4.10.2.2 Note; 5.4.10.2.3 Note 5.5.2.1 Note; 5.5.6 Note; 5.6.4.2.1 Note 2 and Note 3 and Note 4 5.6.8 Note 2; 5.7.7.1 Note 1 and Note 2; 8.5.4.2.3 Note 10.2.1 Table 39 Note 3 and Note 4 and Note 5; 10.5.3 Note 2; 10.6.1 Note 3 F.3.3.4 Note 2; F.3.3.6 Note 3; Y.4.1 Note Y.4.5 Note		P
2	**Modification to Clause 1**		--
1	**Add** the following note at the end of Clause 1: "NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2011/65/EU." Add the following paragraph and note after Note 5: "This document is a type test standard. NOTE Z2 Routine tests of complete equipment, sub-assemblies or components are covered by EN 62911."		P

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

3	**Modification to Clause 2**		
2	Add the following references: EN 71-1:2014+A1:2018, Safety of toys - Part 1: Mechanical and physical properties EN 50332-1:2013, Sound system equipment: Headphones and earphones associated with personal music players - Maximum sound pressure level measurement methodology - Part 1: General method for "one package equipment" EN 50332-2:2013, Sound system equipment: Headphones and earphones associated with personal music players - Maximum sound pressure level measurement methodology - Part 2: Matching of sets with headphones if either or both are offered separately, or are offered as one package equipment but with standardised connectors between the two allowing to combine components of different manufacturers or different design EN 50332-3:2017, Sound system equipment: headphones and earphones associated with personal music players - Maximum sound pressure level measurement methodology - Part 3: Measurement method for sound dose management IEC/TR 62471-2, Photobiological safety of lamps and lamp systems - Part 2: Guidance on manufacturing requirements relating to non-laser optical radiation safety		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

4	**Modification to Clause 4**		--
4.Z1	Add the following new subclause 4.Z1 after subclause 4.9: "For compliance with B.3 and B.4 in circuits connected to an AC mains, protective devices shall be provided, subject to the following: - for pluggable equipment type A, the protective devices shall be included as parts of the equipment, with the exception of components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, for which the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet; - for pluggable equipment type B or permanently connected equipment, the protection may be the dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, for example a fuse or circuit breaker, is fully specified in the installation instructions. Where protective devices are required within the equipment, the protective devices within the equipment shall operate before or at the same time the expected building installation protection will operate. For earth faults in single-phase equipment, it is not necessary to provide 2 protective devices. It is expected that the building installation will protect against earth faults. This applies also in countries where an IT power distribution system is used."		N/A
5	**Modification to subclause 4.1.9**		--
4.1.9	Add the following paragraph at the end of this subclause: "Products need to comply with the requirements of this document with appropriate measurement uncertainty. NOTE Z1 See also the RED ADCO position on 'Measurement uncertainty in published harmonized standards'."		P

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

6	**Modification to subclause 5.4.9.1**		--
5.4.9.1	Add the following note after the 5th paragraph: “NOTE Z1 For guidance on the use of high voltage source, see IEC 60060-1, Clause 8 of IEC 60243-1 and IEC 61180.”		N/A
7	**Modification to subclause 5.4.2.3.2.4**		--
5.4.2.3.2.4	Add the following at the end of this subclause: “The requirement for interconnection with external circuit in a HBES/BACS network is in addition given in EN IEC 63044-3:2018.”		N/A
8	**Modification to subclause 5.6.6.2**		--
5.6.6.2	Replace item d) with the following: “d) For equipment powered from a DC mains, if the protective current rating of the circuit under test exceeds 25 A, the test current shall be minimum as required in item a), unless the manufacturer specifies a higher value.”		N/A
9	**Modification to subclause 9.3.1**		--
9.3.1	Replace the second paragraph with the following: “An accessible part that, while in contact with the body, is likely to drop in temperature upon touch can be evaluated under the limits of Annex A of IEC Guide 117:2010 using the test method of 4.5 of IEC Guide 117.”		P

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

10	**Modification to subclause 10.2.1**		--
10.2.1	Add the following to c) and d) in Table 38: "For additional requirements, see 10.5.1."		N/A
11	**Modification to subclause 10.4.1**		--
10.4.1	Replace the second paragraph of 10.4.1 with: "Electronic light effect equipment does not have to comply with the requirements of 10.4. However, 114 IEC/TR 62471-2 shall be considered and proper installation instructions shall be provided." Replace the ninth paragraph of 10.4.1 with: "The following information shall be provided in the user manual for safe operation and installation. This information shall also be provided for safe operation by a skilled person who may be exposed to Risk Group 3 energy levels. Adequate instructions for proper assembly, installation, maintenance and safe use, including clear warnings concerning precautions to avoid possible exposure to hazardous optical radiation; and Advice on safe operating procedures and warnings concerning reasonably foreseeable misuse, malfunctions and hazardous failure modes. Where servicing and maintenance procedures are detailed, they shall include explicit instructions on safe procedures to be followed; and The marking on the equipment shall be reproduced in the user manual. A yellow background is not required in the user manual."		N/A
12	**Modification to subclause 10.4.4**		--
10.4.4	Replace the last paragraph of 10.4.4 with: "Compliance against material degradation from UV radiation is checked by the applicable tests of Annex C."		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

13	**Modification to subclause 10.5.1**		--
10.5.1	Add the following after the first paragraph: “For RS1 compliance is checked by measurement under the following conditions: In addition to the normal operating conditions, all controls adjustable from the outside of the equipment by hand, by any object such as a tool or a coin, and those internal adjustments or pre-sets which are not locked in a reliable manner, are adjusted so as to give maximum radiation whilst maintaining an intelligible picture for 1 h, at the end of which the measurement is made. NOTE Z1 Soldered joints and paint lockings are examples of adequate locking. The dose-rate is determined by means of a radiation monitor with an effective area of 10 cm2, at any point at a distance of 10 cm from the outer surface of the equipment. Moreover, the measurement shall be made under fault conditions causing an increase of the high-voltage, provided an intelligible picture is maintained for 1 h, at the end of which the measurement is made. For RS1, the dose-rate shall not exceed 1 µSv/h taking account of the background level. NOTE Z2 These values appear in Directive 2013/59/Euratom of 5 December 2013.”		N/A
14	**Modification to subclause 10.5.3**		--
10.5.3	Replace the second paragraph of 10.5.3 with: “The amount of radiation is determined by means of a radiation monitor of the ionizing chamber type with an effective area of 1 000 mm2 ± 10 mm2 or by measuring equipment of other types giving equivalent results.”		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

15	**Modification to Clause 10**		--
	Replace 10.6 with the following:		N/A
10.6	**Safeguards against acoustic energy sources**		N/A
10.6.1	**General**		N/A
10.6.1.1	Introduction Safeguard requirements for protection against long-term exposure to excessive sound pressure levels from personal music players closely coupled to the ear are specified below. Requirements for earphones and headphones intended for use with personal music players are also covered. A personal music player is a portable equipment intended for use by an ordinary person, that: - is designed to allow the user to listen to audio or audiovisual content / material; and - uses a listening device, such as headphones or earphones that can be worn in or on or around the ears; and - has a player that can be body worn (of a size suitable to be carried in a clothing pocket) and is intended for the user to walk around with while in continuous use (for example, on a street, in a subway, at an airport, etc.). EXAMPLES Portable CD players, MP3 audio players, mobile phones with MP3 type features, PDAs or similar equipment. Personal music players shall comply with the requirements of either 10.6.2 or 10.6.3. NOTE 1 Protection against acoustic energy sources from telecom applications is referenced to ITU-T P.360. NOTE 2 It is the intention of the Committee to allow the alternative methods for now, but to only use the dose measurement method as given in 10.6.5 in future. Therefore, manufacturers are encouraged to implement 10.6.5 as soon as possible.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Listening devices sold separately shall comply with the requirements of 10.6.6. These requirements are valid for music or video mode only. The requirements do not apply to: - professional equipment; NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores or general public sales channels are considered not to be professional equipment. - hearing aid equipment and other devices for assistive listening; - the following type of analogue personal music players: - long distance radio receiver (for example, a multiband radio receiver or world band radio receiver, an AM radio receiver), and - cassette player/recorder; NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies. - a player while connected to an external amplifier that does not allow the user to walk around while in use; - hearing protection devices (HPD) that comply with EN 352-8 For equipment that is clearly designed or intended primarily for use by children, the limits of the relevant toy standards may apply. The relevant requirements are given in EN 71-1:2014+A1:2018, 4.20 and the related tests methods and measurement distances apply.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

10.6.2	**Classification of devices without the capacity to estimate sound dose**		N/A
10.6.2.1	General This standard is transitioning from short-term based (30 s) requirements to long-term based (40 h) requirements. These clauses remain in effect only for devices that do not comply with sound dose estimation as stipulated in EN 50332-3:2017. For classifying the acoustic output *L*Aeq,*T*, measurements are based on the A-weighted equivalent sound pressure level over a 30 s period. For music where the average sound pressure (long term *L*Aeq,*T*) measured over the duration of the song is lower than the average produced by the programme simulation noise, measurements may be done over the duration of the complete song. In this case, *T* becomes the duration of the song. NOTE Classical music, acoustic music and broadcast typically has an average sound pressure (long term *L*Aeq,*T*) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the content and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song does not exceed the required limit. For example, if the player is set with the programme simulation noise to 85 dB, but the average music level of the song is only 65 dB, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dB.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.2.2	RS1 limits (to be superseded, see 10.6.3.2) RS1 is a class 1 acoustic energy source that does not exceed the following: - for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the *L*Aeq,*T* acoustic output shall be ≤ 85 dB when playing the fixed “programme simulation noise” described in EN 50332-1:2013; - for equipment provided with a standardized connector (for example, a 3,5 mm headphone/earphone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 27 mV (analogue interface) or −25 dBFS (digital interface) when playing the fixed 214 “programme simulation noise” described in EN 50332-1:2013. The RS1 limits will be updated for all devices as per 10.6.3.2.		N/A
10.6.2.3	RS2 limits (to be superseded, see 10.6.3.3) RS2 is a class 2 acoustic energy source that does not exceed the following: - for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or when the combination of player and listening device is known by other means such as setting or automatic detection, the LAeq,T acoustic output shall be ≤ 100 dB(A) when playing the fixed “programme simulation noise” as described in EN 50332-1:2013: - for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 150 mV (analogue interface) or −10 dBFS (digital interface) when playing the fixed “programme simulation noise” as described in EN 50332-1:2013.		N/A
10.6.2.4	RS3 limits RS3 is a class 3 acoustic energy source that exceeds RS2 limits.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

10.6.3	**Classification of devices (new)**		N/A
10.6.3.1	General Previous limits (10.6.2) created abundant false negative and false positive PMP sound level warnings. New limits, compliant with The Commission Decision 2009/490/EC of 23 June 2009, are given below.		N/A
10.6.3.2	RS1 limits (new) RS1 is a class 1 acoustic energy source that does not exceed the following: - for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the LAeq,T acoustic output shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in EN 50332-1:2013; - for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output voltage shall be ≤ 15 mV (analogue interface) or −30 dBFS (digital interface) when playing the fixed “programme simulation noise” described in EN 50332-1:2013.		N/A
10.6.3.3	RS2 limits (new) RS2 is a class 2 acoustic energy source that does not exceed the following: - for equipment provided as a package (player with its listening device), and with a proprietary connector between the player and its listening device, or where the combination of player and listening device is known by other means such as setting or automatic detection, the weekly sound exposure level, as described in EN 50332-3:2017, shall be ≤ 80 dB when playing the fixed “programme simulation noise” described in 249 EN 50332-1:2013; - for equipment provided with a standardized connector (for example, a 3,5 phone jack) that allows connection to a listening device for general use, the unweighted r.m.s. output level, integrated over one week, as described in EN 50332-3:2017, shall be ≤ 15 mV (analogue interface) or −30 dBFS when playing the fixed “programme simulation noise” described in EN 50332-1:2013.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

10.6.4	**Requirements for maximum sound exposure**		N/A
10.6.4.1	Measurement methods All volume controls shall be turned to maximum during tests. Measurements shall be made in accordance with EN 50332-1:2013 or EN 50332-2:2013 as applicable.		N/A
10.6.4.2	Protection of persons Except as given below, protection requirements for parts accessible to ordinary persons, instructed persons and skilled persons are given in 4.3. NOTE 1 Volume control is not considered to be a safeguard. Between RS2 and an ordinary person, the basic safeguard may be replaced by an instructional safeguard in accordance with Clause F.5, except that the instructional safeguard shall be placed on the equipment, or on the packaging, or in the instruction manual. Alternatively, the instructional safeguard may be given through the equipment display during use. The elements of the instructional safeguard shall be as follows: - element 1a: the symbol , IEC 60417-6044 (2011–01) - element 2: “High sound pressure” or equivalent text - element 3: “Hearing damage risk” or equivalent text - element 4: “Do not listen at high volume levels for long periods.” or equivalent text An equipment safeguard shall prevent exposure of an ordinary person to an RS2 source without intentional physical action from the ordinary person and shall automatically return to an output level not exceeding what is specified for an RS1 source when the power is switched off. The equipment shall provide a means to actively inform the user of the increased sound level when the equipment is operated with an output level exceeding RS1 limits. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an output level exceeding RS1 limits. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	NOTE 2 Examples of means include visual or audible signals. Action from the user is always needed. NOTE 3 The 20 h listening time is the accumulative listening time, independent of how often and how long the personal music player has been switched off. A skilled person shall not be unintentionally exposed to RS3.		N/A
10.6.5	**Requirements for dose-based systems**		N/A
10.6.5.1	General requirements Personal music players shall give the warnings as provided below when tested according to EN 50332-3:2017, using the limits from this clause. The manufacturer may offer optional settings to allow the users to modify when and how they wish to receive the notifications and warnings to promote a better user experience without defeating the safeguards. This allows the users to be informed in a method that best meets their physical capabilities and device usage needs. If such optional settings are offered, an administrator (for example, parental restrictions, business/educational administrators, etc.) shall be able to lock any optional settings into a specific configuration. The personal music player shall be supplied with easy to understand explanation to the user of the dose management system, the risks involved, and how to use the system safely. The user shall be made aware that other sources may significantly contribute to their sound exposure, for example work, transportation, concerts, clubs, cinema, car races, etc.		N/A
10.6.5.2	Dose-based warning and requirements When a dose of 100 % CSD is reached, and at least at every 100 % further increase of CSD, the device shall warn the user and require an acknowledgement. In case the user does not acknowledge, the output level shall automatically decrease to a level in compliance with class RS1 limits. The warning shall at least clearly indicate that listening above 100 % CSD leads to the risk of hearing damage or loss.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.5.3	Exposure-based requirements With only dose-based requirements, cause and effect could be far separated in time, defying the purpose of educating users about safe listening practice. In addition to dose-based requirements, a PMP shall therefore also put a limit to the short-term sound level a user can listen at. The exposure-based limiter (EL) shall automatically reduce the sound level not to exceed 100 dB(A) or 150 mV integrated over the past 180 s, based on methodology defined in EN 50332-3:2017. The EL settling time (time from starting level reduction to reaching target output level) shall be 10 s or less. Test of EL functionality is conducted according to EN 50332-3:2017, using the limits from this clause. For equipment provided as a package (player with its listening device), the level integrated over 180 s shall be 100 dB or lower. For equipment provided with a standardized connector, the un-weighted level integrated over 180 s shall be no more than 150 mV for an analogue interface and no more than −10 dBFS for a digital interface. In case the source is known not to be music (or test signal), the EL may be disabled.		N/A
10.6.6	**Requirements for listening devices (headphones, earphones, etc.)**		N/A
10.6.6.1	Corded listening devices with analogue input With 94 dB *L*Aeq acoustic pressure output of the listening device, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximizes the measured acoustic output level, the input voltage of the listening device when playing the fixed “programme simulation noise” as described in EN 50332-1:2013 shall be ≥ 75 mV. NOTE The values of 94 dB and 75 mV correspond with 85 dB and 27 mV in 10.6.2.2. or 100 dB and 150 mV in 10.6.2.3.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
10.6.6.2	Corded listening devices with digital input With any playing device playing the fixed "programme simulation noise" described in EN 50332-1:2013, and with the volume and sound settings in the listening device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output, the *L*Aeq,*T* acoustic output of the listening device shall be ≤ 100 dB with an input signal of −10 dBFS.		N/A
10.6.6.3	Cordless listening devices In cordless mode, with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1:2013; and respecting the cordless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and with volume and sound settings in the receiving device (for example, built-in volume level control, additional sound features like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the above mentioned programme simulation noise, the *L*Aeq,*T* acoustic output of the listening device shall be ≤ 100 dB with an input signal of −10 dBFS.		N/A
10.6.6.4	Measurement method Measurements shall be made in accordance with EN 50332-2:2013 as applicable."		N/A
16	**Modification to subclause G.3.1.2**		--
G.3.1.2	Add the following note after the first paragraph: "NOTE Z1 An IEC 60730 series standard is considered relevant if the component in question falls within its scope."		N/A
17	**Modification to subclause G.7.1**		--
G.7.1	Add the following note at the end of the subclause: "NOTE Z1 The harmonized code designations corresponding to the IEC cable types are given in Annex ZD."		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

18	**Modification to subclause M.2**		--
M.2	Add the following paragraph after the first paragraph: “The size of the battery compartment shall be designed taking into account the battery compartment recommendations of the relevant battery standard. NOTE For general guidance on the design of the battery compartment, see Clause 8 of IEC 62485-4.”		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

19	**Modification to Bibliography**	--
	Add the following references: EN 60060-1, High-voltage test techniques – Part 1: General definitions and test requirements EN 60898-1, Electrical accessories – Circuit-breakers for overcurrent protection for household and similar installations – Part 1: Circuit-breakers for a.c. operation EN 62911, Audio, video and information technology equipment – Routine electrical safety testing in production ADCO RED Position on 'Measurement uncertainty in published harmonized standards' – https:// ec.europa .eu/ docsroom/ documents/ 32381 Add the following notes for the standards indicated: IEC 60060-1 NOTE Harmonized as EN 60060-1. IEC 60130-9 NOTE Harmonized as EN 60130-9. IEC 60204-1 NOTE Harmonized as EN IEC 60204-1. IEC 60204-11 NOTE Harmonized as EN IEC 60204-11. IEC 60243-1 NOTE Harmonized as EN 60243-1. IEC 60269-2 NOTE Harmonized as HD 60269-2. IEC 60309-1 NOTE Harmonized as EN 60309-1. IEC 60364 NOTE some parts harmonized in HD 384/HD 60364 series. IEC 60601-2-4 NOTE Harmonized as EN 60601-2-4. IEC 60664-5:2005 NOTE Harmonized as EN 60664-5:2007. IEC 60721-3-4 NOTE Harmonized as EN IEC 60721-3-4. IEC 61032:1997 NOTE Harmonized as EN 61032:1998 (not modified). IEC 61180 NOTE Harmonized as EN 61180.	P

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	IEC 61508-1	NOTE	Harmonized as EN 61508-1.	P
	IEC 61558-2-1	NOTE	Harmonized as EN 61558-2-1.	
	IEC 61558-2-4	NOTE	Harmonized as EN 61558-2-4.	
	IEC 61558-2-6	NOTE	Harmonized as EN 61558-2-6.	
	IEC 61643-21	NOTE	Harmonized as EN 61643-21.	
	IEC 61643-311	NOTE	Harmonized as EN 61643-311.	
	IEC 61643-321	NOTE	Harmonized as EN 61643-321.	
	IEC 61643-331	NOTE	Harmonized as EN IEC 61643-331.	
	IEC 61140:2016	NOTE	Harmonized as EN 61140:2016.	
	IEC 61439-5:2014	NOTE	Harmonized as EN 61439-5:2015.	
	IEC 61969-3	NOTE	Harmonized as EN 61969-3.	
	IEC 62040:2017	NOTE	Harmonized as EN IEC 62040:2019.	
	IEC 62305-1	NOTE	Harmonized as EN 62305-1.	
	IEC 62368-3	NOTE	Harmonized as EN 62368-3.	
	IEC 62485-4	NOTE	Harmonized as EN IEC 62485-4.	
	ISO 10218-1	NOTE	Harmonized as EN ISO 10218-1.	
	ISO 10218-2	NOTE	Harmonized as EN ISO 10218-2.	
	ISO 13482	NOTE	Harmonized as EN ISO 13482.	
	ISO 13850	NOTE	Harmonized as EN ISO 13850.	

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

20	**Addition of annexes**		--
ZB	**ANNEX ZB, SPECIAL NATIONAL CONDITIONS**		N/A
4.1.15	Finland, Norway and Sweden To the end of the subclause the following is added: Class I pluggable equipment type A intended for connection to other equipment or a network shall, if safety relies on connection to reliable earthing or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment shall be connected to an earthed mains socket-outlet. The marking text in the applicable countries shall be as follows: In Finland: “Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan” In Norway: “Apparatet må tilkoples jordet stikkontakt” In Sweden: “Apparaten skall anslutas till jordat uttag”		N/A
4.7.3	United Kingdom To the end of the subclause the following is added: The torque test is performed using a socket-outlet complying with BS 1363, and the plug part shall be assessed to the relevant clauses of BS 1363. Also see Annex G.4.2 of this annex.		N/A
5.4.11.1 and Annex G	Finland and Sweden To the end of the subclause the following is added: For separation of the telecommunication network from earth the following is applicable: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	If this insulation forms part of a semiconductor component (e.g. an optocoupler), there is no distance through insulation requirement for the insulation consisting of an insulating compound completely filling the casing, so that clearances and creepage distances do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition - passes the tests and inspection criteria of 5.4.7 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 5.4.9 shall be performed using 1,5 kV), and - is subject to routine testing for electric strength during manufacturing, using a test voltage of 1,5 kV. It is permitted to bridge this insulation with a capacitor complying with EN 60384-14, subclass Y2. A capacitor classified Y3 according to EN 60384-14, may bridge this insulation under the following conditions: - the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in 5.4.10; - the additional testing shall be performed on all the test specimens as described in EN 60384-14; - the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.		N/A
5.5.2.1	Norway After the 3rd paragraph the following is added: Due to the IT power distribution system used, capacitors are required to be rated for the applicable line-to-line voltage (230 V).		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.6	Finland, Norway and Sweden To the end of the subclause the following is added: Resistors used as basic safeguard or bridging basic insulation in class I pluggable equipment type A shall comply with G.10.1 and the test of G.10.3.		N/A
5.6.4.2.1	Ireland and United Kingdom After the indent for pluggable equipment type A, the following is added: - the protective current rating is taken to be 13 A, this being the largest rating of fuse used in the mains plug.		N/A
5.6.4.2.1	France After the indent for pluggable equipment type A, the following is added: - in certain cases, the protective current rating of the circuit supplied from the mains is taken as 20 A instead of 16 A. *Justification:* In France, according to NF C15-100 standard, in certain cases, the maximum rated current of the protective device circuit-breaker is 20 A.		N/A
5.6.5.1	Ireland and United Kingdom To the second paragraph the following is added: The range of conductor sizes of flexible cords to be accepted by terminals for equipment with a rated current over 10 A and up to and including 13 A is: 1,25 mm2 to 1,5 mm2 in cross-sectional area.		N/A
5.6.8	Norway To the end of the subclause the following is added: Equipment connected with an earthed mains plug is classified as class I equipment. See the Norway marking requirement in 4.1.15. The symbol IEC 60417-6092, as specified in F.3.6.2, is accepted.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

5.7.7.1	Norway and Sweden To the end of the subclause the following is added: The screen of the television distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation needs to be isolated from the screen of a cable distribution system. It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by a retailer, for example. The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in: “Apparatus connected to the protective earthing of the building installation through the mains connection or through other apparatus with a connection to protective earthing – and to a television distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a television distribution system therefore has to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)” NOTE In Norway, due to regulation for CATV-installations, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV RMS, 50 Hz or 60 Hz, for 1 min. Translation to Norwegian (the Swedish text will also be accepted in Norway): “Apparater som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et koaksialbasert kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av apparater til kabel-TV nett installeres en galvanisk isolator mellom apparatet og kabel-TV nettet.”		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	Translation to Swedish: ”Apparater som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av apparaten till kabel-TV nät galvanisk isolator finnas mellan apparaten och kabel-TV nätet.”.		N/A
8.5.4.2.3	United Kingdom Add the following after the 2nd dash bullet in 3rd paragraph: An emergency stop system complying with the requirements of EN IEC 60204-1 and EN ISO 13850 is required where there is a risk of personal injury.		N/A
B.3.1 and B.4	Ireland and United Kingdom The following is applicable: To protect against excessive currents and short-circuits in the primary circuit of direct plug-in equipment, tests according to Annexes B.3.1 and B.4 shall be conducted using an external miniature circuit breaker complying with EN 60898-1, Type B, rated 32A. If the equipment does not pass these tests, suitable protective devices shall be included as an integral part of the direct plug-in equipment, until the requirements of Annexes B.3.1 and B.4 are met		N/A
G.4.2	United Kingdom To the end of the subclause the following is added: The plug part of direct plug-in equipment shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16, and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.1	United Kingdom To the first paragraph the following is added: Equipment which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord shall be fitted with a 'standard plug' in accordance with the Plugs and Sockets etc. (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768, unless exempted by those regulations. NOTE "Standard plug" is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.		N/A
G.7.1	Ireland To the first paragraph the following is added: Apparatus which is fitted with a flexible cable or cord shall be provided with a plug in accordance with Statutory Instrument 525: 1997, "13 A Plugs and Conversion Adapters for Domestic Use Regulations: 1997. S.I. 525 provides for the recognition of a standard of another Member State which is equivalent to the relevant Irish Standard		N/A
G.7.2	Ireland and United Kingdom To the first paragraph the following is added: A power supply cord with a conductor of 1,25 mm^2 is allowed for equipment which is rated over 10 A and up to and including 13 A.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ZC	**ANNEX ZC, NATIONAL DEVIATIONS**		**--**
10.5.2	Germany The following requirement applies: For the operation of any cathode ray tube intended for the display of visual images operating at an acceleration voltage exceeding 40 kV, authorization is required, or application of type approval (Bauartzulassung) and marking. *Justification*: German ministerial decree against ionizing radiation (Röntgenverordnung), in force since 2002-07-01, implementing the European Directive 96/29/EURATOM. NOTE Contact address: Physikalisch-Technische Bundesanstalt, Bundesallee 100, D-38116 Braunschweig, Tel.: Int+49–531–592–6320, Internet: http://www.ptb.de		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ZD	**IEC and CENELEC CODE DESIGNATIONS FOR FLEXIBLE CORDS**	--
		N/A

Type of flexible cord	Code designations	
	IEC	CENELEC
PVC insulated cords		
Flat twin tinsel cord	60227 IEC 41	H03VH-Y
Light polyvinyl chloride sheathed flexible cord	60227 IEC 52	H03VV-F H03VVH2-F
Ordinary polyvinyl chloride sheathed flexible cord	60227 IEC 53	H05VV-F H05VVH2-F
Rubber insulated cords		
Braided cord	60245 IEC 51	H03RT-F
Ordinary tough rubber sheathed flexible cord	60245 IEC 53	H05RR-F
Ordinary polychloroprene sheathed flexible cord	60245 IEC 57	H05RN-F
Heavy polychloroprene sheathed flexible cord	60245 IEC 66	H07RN-F
Cords having high flexibility		
Rubber insulated and sheathed cord	60245 IEC 86	H03RR-H
Rubber insulated, crosslinked PVC sheathed cord	60245 IEC 87	H03RV4-H
Crosslinked PVC insulated and sheathed cord	60245 IEC 88	H03V4V4-H
Cords insulated and sheathed with halogen-free thermoplastic compounds		
Light halogen-free thermoplastic insulated and sheathed flexible cords		H03Z1Z1-F H03Z1Z1H2-F
Ordinary halogen-free thermoplastic insulated and sheathed flexible cords		H05Z1Z1-F H05Z1Z1H2-F

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT to TRF IEC62368_1F

ATTACHMENT TO TEST REPORT
IEC62368-1:2023
SWITZERLAND NATIONAL DIFFERENCES
(Safety requirements for Audio/video, information and communication technology equipment
Part 1: General requirements)

Differences according to ..... : SN EN IEC 62368-1:2024+A11:2024

TRF template used: ..... : IECEE OD-2020-F3:2024, Ed. 1.3

Attachment Form No. ..... : CH_ND_IEC62368_1F

Attachment Originator..... : EMC-TESTCENTER AG

Master Attachment ..... : Dated 2025-06-20

Copyright © 2024 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

Clause	Requirement + Test	Result - Remark	Verdict
	National Differences		N/A
4.10.3	Supply cords of portable electrical appliances having a rated current not exceeding 10 A is provided with a plug complying with IEC 60884-1 (Ed. 3.2) and one of the following dimension sheets of SN 441011 series:		N/A
	- Standard sheet 2015-2 (SN 441011-2-1:2024) Plug Type 15: 3L + N + PE, 250/400 V, 10 A		N/A
	- Standard sheet 2011-2 Plug Type 11: L + N, 250 V, 10 A		N/A
	- Standard sheet 2012-2 Plug Type 12: L + N + PE, 250 V, 10 A		N/A
	Supply cords of portable electrical appliances having a rated current not exceeding 16 A is provided with a plug complying with IEC 60884-1 (Ed. 3.2) and one of the following dimension sheets of SN 441011 series:		N/A
	- Standard sheet 2025-2 Plug Type 25: 3L + N + PE, 250/400 V, 16 A		N/A
	- Standard sheet 2021-2 Plug Type 21: L + N, 250 V, 16 A		N/A
	- Standard sheet 2023-2 Plug Type 23: L + N + PE, 250 V, 16 A		N/A
	NOTE 16 A plugs are not often used in Swiss domestic installation system		—

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

Clause	Requirement + Test	Result - Remark	Verdict
	Non removable adapters to Swiss plugs: Non removable adapters are fixed to the original plug and cannot be removed without damage the plug. These adapters can be used for products intended for sale in Switzerland. The following restrictions have to be considered:		N/A
	- power rating 10 A/ 16 A		N/A
	- earth pin corresponds with the protection class		N/A
	- assembly note has to be attached to the equipment		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT to TRF IEC62368_1F
ATTACHMENT TO TEST REPORT **IEC 62368-1:2023** **CANADA and US NATIONAL DIFFERENCES** (**Audio/Video, information and communication technology equipment – Part 1:Safety requirements**)
Differences according to ..... : CSA UL 62368-1:2025 issued July 31, 2025
TRF template used: ..... : IECEE OD-2020-F3:2024, Ed. 1.3
Attachment Form No. ..... : CA_US_ND_IEC62368_1F **Attachment Originator**..... : UL Solutions (US) **Master Attachment** ..... : Dated 2025-08-25
Copyright © 2025 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.

Clause	Requirement + Test	Result - Remark	Verdict
	National Differences		P
1 (1DV.1) (1.3)	All equipment is to be designed to allow installation in accordance with the National Electrical Code (NEC), ANSI/NFPA 70, the Canadian Electrical Code (CE Code), Part 1, CAN/CSA C22.1, and when applicable, the National Electrical Safety Code, IEEE C2. Also, for such equipment marked or otherwise identified, installation is allowed per the Standard for the Protection of Information Technology Equipment, ANSI/NFPA 75.		P
1 (1DV.2.1)	This standard includes additional requirements for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities. See Annex DVB.		N/A
1 (1DV.2.2)	This standard includes additional requirements for equipment intended for mounting under cabinets. See Annex DVC.		N/A
1 (1DV.2.3)	IEC 62368-3 clause 5 for DC power transfer at ES1 or ES2 voltage levels is considered informative. IEC 62368-3 clause 6 for remote power feeding telecommunication (RFT) circuits is considered normative (see ITU K.50). Alternatively, equipment with RFT circuits are given in either UL 2391 or CSA C22.2 No. 60950-21/UL 60950-21. RFT-C circuits are not permitted unless the RFT-C circuit complies with RFT-V limits (≤ 200V per conductor to earth).		N/A
1(1DV2.4)	This standard does not cover Modular Data Centers (MDCs), only the information and communication technology equipment contained within.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
1 (1DV.2.5)	For industrial Additive Manufacturing Equipment (industrial 3D printers), refer to UL 2011, CSA C22.2 No. 301.		N/A
1 (1DV.3)	For protection against direct lightning strikes, reference is made to NFPA 780 and CAN/CSA-B72 for additional requirements.		N/A
1 (1DV.4)	For Battery Backup Systems in separate cabinets, refer to ANSI/CAN/UL 1973.		N/A
	For Stationary Standby Batteries covered in Article 480 of the NEC, refer to UL 1989.		N/A
	For Energy Storage Systems (ESS) covered in Article 706 of the NEC, refer to ANSI/CAN/UL 9540.		N/A
1 (DV.5)	Additional requirements apply to some forms of power distribution equipment, including sub-assemblies.		N/A
1 (1DV.6)	Fault-Managed (Class 4) Power Systems covered in Article 726 of the NEC are required to comply with UL 1400-1.		N/A
4.1 (4.1.8)	For equipment using refrigerants, refer to CSA C22.2 No. 60335-2-40/UL 60335-2-40, CSA C22.2 No. 61010-2-011, and UL 61010-2-011.		N/A
4.1 (4.1.17)	For lengths exceeding 3.05 m, external interconnecting cable assemblies are required to be a suitable cable type (e.g., DP, CL2) specified in the NEC.		N/A
	For lengths 3.05 m or less, external interconnecting cable assemblies that are not types specified in the NEC generally are required to have special construction features and identification markings.		N/A
4.6 (4.6.2)	Wire-wrap terminals have special construction and performance requirements.		N/A
4.8 (4.8.1, 4.8.5)	Equipment likely to be accessible to children with coin or button cell batteries is required to comply with UL 4200A. This requirement applies whether the coin or button cell battery is replaceable or non-replaceable. This requirement does not apply to professional equipment. Note: additional UL 4200A TRF attachment is appended to end of this ND TRF.		N/A
5.4.2.3.2 (5.4.2.3.2.1)	Surge Arrestors and Transient Voltage Surge Suppressors installed external to the equipment are required to comply with the appropriate NEC and CE Code requirements.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.5.9	Receptacles rated 125-V, single phase, 15- or 20-A accessible to either ordinary, instructed, or skilled persons are required to be provided with GFCI Protection for Personnel if the equipment containing the receptacles is installed outdoors. The protection devices are required to comply with UL 943, and CAN/CSA C22.2 No.144.		N/A
5.6.3	Protective earthing conductors comply with the minimum conductor sizes in Table G.7, except as required by Table G.7ADV.1 for cord connected equipment, or Annex DVH for permanently connected equipment.		N/A
5.7.8 (5.7.8.1, 5.7.9.1)	Equipment intended to receive telecommunication ringing signals is required to comply with a special touch current measurement tests.		N/A
6.5.1	PS3 wiring outside a fire enclosure is required to comply with single fault testing in B.4, or be current limited per one of the permitted methods.		N/A
Annex F (F.3.3.9)	Output terminals provided for supply of other equipment, except mains supply, are required to be marked with a maximum rating or reference to equipment permitted to be connected.		N/A
Annex F (F.3.7)	Outdoor Enclosures are required to be classified and marked in accordance with UL 50 or 50E, or CAN/CSA C22.2 No. 94.1 or 94.2.		N/A
Annex G (G.7)	Permanent connection of equipment to the mains supply by a power supply cord is not permitted, except for certain equipment, such as ATMs.		N/A
	Power supply cords are required to have attachment plugs rated not less than 125 percent of the rated current of the equipment.		N/A
	Flexible power supply cords are required to be compatible with Article 400 of the NEC and associated requirements of the CE Code.		N/A
	Minimum cord length is required to be 1.5 m, with certain constructions such as external power supplies allowed to consider both input and output cord lengths into the requirement. Power supply cords are required to be no longer than 4.5 m in length if used in ITE Rooms.		N/A
	Power supply cords for outdoor equipment are required to be suitable outdoor use type as required by Article 400.4 of the NEC and Rule 4-012 of the CE Code, i.e., marked “W.”		N/A
Annex H.2	Continuous ringing signals under normal operating conditions up to 16 mA only are permitted if the equipment is subjected to special installation and performance restrictions.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex H.4	For circuits with other than ringing signals and with voltages exceeding 42.4 Vpeak or 60 Vd.c., the maximum acceptable current through a 2000 ohm resistor (or greater) connected across the voltage source with other loads disconnected is 7.1 mA peak or 30 mA d.c. under normal operating conditions.		N/A
Annex Q (Q.3)	Equipment with paired conductor and/or coax communications cables/wiring connected to building wiring are required to have special voltage, current, power and marking requirements.		N/A
Annex DVA (1)	Equipment that is designed such that it may be powered from a separate electrical service, is required to meet applicable requirements for service equipment for control and protection of services and their installation and complies with Article 230 of the National Electrical Code (NEC), NFPA 70 and Section 6 of the Canadian Electrical Code, Part I, CSA C22.1.		N/A
	Equipment intended for use in spaces used for environmental air (plenums) are subjected to special flammability requirements for heat and visible smoke release.		N/A
	For ITE room applications, automated information storage systems with combustible media greater than 0.76 m^3 (27 cu ft) are required to have a provision for connection of either automatic sprinklers or a gaseous agent extinguishing system with an extended discharge.		N/A
	Consumer products designed or intended primarily for children 12 years of age or younger are subject to additional requirements in accordance with U.S. and Canadian Regulations.		N/A
	Baby monitors are required to additionally comply with ASTM F2951, Consumer Safety Specification for Baby Monitors.		N/A
	Storage batteries and battery management equipment, other than associated with lead-acid batteries, and including battery backup systems that are not an integral part of stationary AV and ICT equipment, such as provided in separate cabinets, are required to be certified (listed) to the appropriate standard(s) for such storage batteries and equipment.		N/A
	Non-Industrial Additive Manufacturing Equipment (non-Industrial 3D Printers) have special limitations in accordance with NFPA 1 and the International Code Council (ICC) International Fire Code (IFC).		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Network Connected Life Safety Equipment AV/ICT equipment used in life safety applications shall incorporate cybersecurity safeguards establishing its ability to withstand unauthorized updates and malicious attacks while continuing to perform its intended safety functionality.		N/A
Annex DVA (4.8)	See 4.8.		N/A
Annex DVA (5.6)	For Pluggable Equipment Type A, the protection in the installation is assumed to be 20A.		N/A
Annex DVA (6.3)	The maximum quantity of flammable liquid stored in equipment is required to comply with NFPA 30.		N/A
Annex DVA (6.4.8)	For ITE room applications, enclosures with combustible material measuring greater than 0.9 m^2 (10 sq ft) or a single dimension greater than 1.8 m (6 ft) are required to have a flame spread rating of 50 or less. For equipment with the same dimensions for other applications, an external surface that is not a fire enclosure requires a minimum flammability classification of V-1.		N/A
Annex DVA (10.3)	Equipment with lasers is required to meet the U.S. Code of Federal Regulations 21 CFR 1040 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (10.5)	Equipment that produces ionizing radiation is required to comply with the U.S. Code of Federal Regulations, 21 CFR 1020 (and the Canadian Radiation Emitting Devices Act, REDR C1370).		N/A
Annex DVA (F.3.3.4)	Equipment for use on a.c. mains supply systems with a neutral and more than one phase conductor (e.g. 120/240 V, 3-wire) require a special marking format for electrical ratings. Additional considerations apply for voltage ratings that exceed the attachment cap rating or that are lower than the “Normal Operating Condition” in Table 2 of CAN/CSA C22.2 No. 235.”		N/A
Annex DVA (F.3.3.6)	Equipment identified for ITE (computer) room installation is required to be marked with the rated current.		N/A
Annex DVA (G.1)	Vertically-mounted disconnect switches and circuit breakers are required to have the "on" position indicated by the handle in the up position, where mounted in an enclosure, vertically mounted disconnect switches and circuit breakers with vertical operating means extending outside the enclosure are required to indicate in a location visible when accessing the external operating means whether the switch or circuit breaker is in the open (off) or closed (on) position.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVA (G.3.4)	Suitable NEC/CE Code branch circuit protection rated at the maximum circuit rating is required for all standard supply outlets and receptacles (such as supplied in power distribution units) if the supply branch circuit protection is not suitable.		N/A
	Where a fuse is used to provide Class 2 or Class 3 current limiting, it is not operator-accessible unless it is non- interchangeable.		N/A
Annex DVA (G.4.2)	Equipment with isolated ground (earthing) receptacles is required to comply with NEC 250.146(D) and CE Code 10-400 and 10-614.		N/A
Annex DVA (G.4.3)	Interconnection of units by conductors supplied by a limited power source, or a Class 2 circuit defined in the NEC/CE Code may have field wiring connections other than specified in DVH.3, such as wire-wrap and crimp-on types, if the limited power source and Class 2 circuits are separated from all other circuits by barriers, routing or fixing.		N/A
Annex DVA (G.5.3)	Power distribution transformers distributing power at 100 volts or more, and rated 10 kVA or more, require special transformer overcurrent protection.		N/A
Annex DVA (G.5.4)	Motor control devices are required for cord-connected equipment with a mains-connected motor if the equipment is rated more than 12 A, or if the equipment has a nominal voltage rating greater than 120 V, or if the motor is rated more than 1/3 hp (locked rotor current over 43 A).		N/A
Annex DVA (G.7)	Flexible cords used outdoors are required to have the suffix “W” marked on the flexible cord.		N/A
Annex DVA (G.8)	Safety circuits for personnel protection that are subject to damage from surge events shall have surge protection installed within or immediately adjacent to the control panel.		N/A
Annex DVA (M)	For ITE room applications, equipment with battery systems capable of supplying 750 VA for five minutes are required to have a battery disconnect means that may be connected to the ITE room remote power-off circuit.		N/A
Annex DVA (Q)	If applicable per NEC 725.60(C) and CE Code 16-350, some limited power sources supplied from AV/ICT equipment are required to have a label indicating the maximum voltage and rated current output for per conductor for each connection point. Where multiple connection points have the same rating, a single label is permitted to be used.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Wiring terminals intended to supply Class 2 outputs in accordance with the NEC or CE Code Part 1are required to be marked with the voltage rating and “Class 2” or equivalent. The marking is located adjacent to the terminals and visible during wiring.		N/A
	Applicable parts of Chapter 8 of the NEC, and Rules 54 and 60 of the CE Code, may be applicable to ITE installed outdoors with connections to communication systems.		N/A
Annex DVB (1)	Additional requirements apply for equipment used for entertainment purposes intended for installation in general patient care areas of health care facilities.		N/A
Annex DVC (1)	Additional requirements apply for equipment intended for mounting under kitchen cabinets.		N/A
Annex DVE (4.1.1)	Some equipment, components, sub-assemblies and materials associated with the risk of fire, electric shock, or personal injury are required to have component or material ratings in accordance with the applicable national (U.S. and Canadian) component or material requirements. These equipment and components include: appliance couplers, attachment plugs, battery backup systems, circuit breakers, communication circuit accessories, connectors (used for current interruption of non-LPS circuits), direct plug-in equipment, electrochemical capacitor modules (energy storage modules with ultracapacitors), enclosures (outdoor), flexible cords and cables, fuses (branch circuit), ground-fault current interrupters, interconnecting cables, modular data centres, power supply cords, some power distribution equipment, printed wiring, protectors for communications circuits, receptacles, surge protective devices, vehicle battery adapters, wire connectors, and wire and cables.		P
Annex DVH	Equipment for permanent connection to the mains supply is subjected to additional requirements.		N/A
Annex DVH (DVH.1)	Wiring methods (terminals, leads, etc.) used for the connection of the equipment to the mains are required to be in accordance with the NEC/CE Code.		N/A
Annex DVH (DVH.2.1)	For safe and reliable connection to a mains, permanently connected equipment is to be provided.		N/A
Annex DVH (DVH.2.2)	Additional considerations are applicable for D.C. mains.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVH (DVH.3.2.1)	Terminals for permanent wiring, including protective earthing terminals, are required to be suitable for U.S./Canadian wire gauge sizes, rated 125 percent of the equipment rating, and be specially marked when specified.		N/A
Annex DVH (DVH.3.2.3)	Wire binding screws are not permitted to attach conductors larger than 10 AWG (5.3 mm^2).		N/A
Annex DVH (DVH.3.2.4)	All associated mains supply terminals are to be located in proximity to each other and to the main protective earthing terminal, if any.		N/A
Annex DVH (DVH.3.2.5)	Terminals are required to be located, guarded or insulated so that, should a strand of a conductor escape when the conductor is fitted, there is no likelihood of accidental contact between such a strand and accessible conductive parts or unearthed conductive parts separated from accessible conductive parts by supplementary insulation only.		N/A
Annex DVH (DVH.3.3)	When field connection to an external circuit is via wires (example, free conductors), the wires are required to be not smaller than 18 AWG (0.82 mm^2) and the free length of the wire inside an outlet box or wiring compartment is required to be 150 mm or more.		N/A
Annex DVH (DVH.3.4)	Size of protective earthing conductors and terminals are required to comply with specified national conditions.		N/A
Annex DVH (DVH.4)	Permanently connected equipment is required to have a suitable wiring compartment and wire bending space.		N/A
Annex DVH (DVH.4.1)	Wire bending space are required to comply with specified national conditions.		N/A
Annex DVH (DVH.4.2)	Volume of wiring compartment is required to comply with specified national conditions.		N/A
Annex DVH (DVH.4.3)	Separation of circuits is required to comply with specified national conditions.		N/A
Annex DVH (DVH.5)	Equipment markings and instructional safeguards are required to comply with specified national conditions.		N/A
Annex DVH (DVH.5.1)	Identification of protective earthing terminal required to comply with specified national conditions.		N/A
Annex DVH (DVH.5.2)	Identification of terminal for earthed conductor (neutral) is required to comply with specified national conditions.		N/A
Annex DVH (DVH.5.3)	Identification of terminals for aluminium conductors is required to comply with specified national conditions.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
Annex DVH (DVH.5.4)	Wire temperature ratings are required to comply with specified national conditions.		N/A
Annex DVH (DVH 5.5)	Equipment connected to a centralized d.c. power system, and having one pole of the DC mains input terminal connected to the main protective earthing terminal in the equipment, is required to comply with special earthing, wiring, marking and installation instruction requirements.		N/A
Annex DVI (6.7)	Equipment intended for connection to telecommunication network outside plant cable is required to be protected against overvoltage from power line crosses.		N/A
Annex DVJ (10.6.1)	Equipment connected to a telecommunication and cable distribution networks and supplied with an earphone intended to be held against, or in the ear is required to comply with special acoustic pressure requirements.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

ATTACHMENT to TRF IEC62368_1F			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT **IEC 62368-1:2023** **JAPAN NATIONAL DIFFERENCES** Audio/video, information and communication technology equipment – Part 1: Safety requirements			
Differences according to .....: J62368-1(2023)			
TRF template used: ..... : IECEE OD-2020-F3:2022, Ed. 1.2			
Attachment Form No. .....: JP_ND_IEC62368_1F **Attachment Originator**.....: UL Solutions (JP) **Master Attachment** .....: Dated 2023-10-19			
Copyright © 2023 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
J62368-1(2023) is an adoption of IEC 62368-1:2018 with national conditions that deviate from it. However, the NCB will accept use of IEC 62368-1:2023 for the purpose of demonstration of compliance with J62368-1(2023) only for the products out of scope of the Electrical Appliance and Materials Safety Acts (also known as PSE), provided that the following National Differences are addressed.			
	National Differences		P
4.1.2	Where the component, or a characteristic of a component, is a safeguard or a part of a safeguard, components shall comply with the requirements of this document or, where specified in a requirements clause, with the safety aspects of the relevant JIS component standards or IEC component standards, or components shall have properties equivalent to or better than these.		P
5.6.1	Mains socket-outlet and interconnection coupler shall comply with Clause G.4.2A if they are incorporated as part of the equipment.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.6.2.1	Connection for protective conductor of class 0I equipment provided with instructional safeguard in accordance with Clause F.3.6.1A is considered to make earlier and break later than supply connection. Mains plug having a lead wire for protective earthing connection of class 0I equipment shall comply with all of the following: – Not to be used for equipment having a rated voltage of 150 V or more – Clip is not used for the earthing connection of the lead wire. – The lead wire for earthing is at least 10 cm long If class 0I equipment provides an independent main protective earthing terminal and is intended to be installed by ordinary person, earthing wire shall be provided in the package of the equipment.		N/A
5.6.2.2	Internal earthing conductor of the cord set that is covered by the sheath of mains cord and is formed together with mains plug and appliance connector need not be green-and-yellow.		N/A
5.6.3	In case of class 0I equipment using power supply cord having two conductors (no earthing conductor), the conductor of protective earthing lead wire shall comply with either of the following: – use of annealed copper wire with 1.6 mm diameter or corrosion-inhibiting metal wire having size and strength that are equivalent to or more than the above copper wire – single core cord or single core cab tire cable with 1.25 mm^2 or more cross-sectional area		N/A
5.7.3	For class 0I equipment that is provided with mains socket-outlet in the configuration as specified in JIS C 8282 series, JIS C 8300 or JIS C 8303, or that is provided with mains appliance outlet as specified in JIS C 8283 series for the purpose of interconnection, the measurement is conducted on the system of the interconnected equipment having a single connection to the mains.		N/A
5.7.5	In case of class 0I equipment, touch current shall not exceed 1.41 mA peak or for sinusoidal wave, 1.0 mA r.m.s. when measured using the network specified in Figure 4 of IEC 60990:2016.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.4.3.2	A fuse complying with JIC C 6575 series or a fuse having equivalent characteristics shall open within 1 s. A fuse having time/current characteristics other than those specified in IEC 60127 shall be tested with the characteristics taken into account. In case of Class A fuse of JIS C 6575, replace “2.1 times” by “1.35 times” and in case of Class B fuse of JIS C 6575, replace “2.1 times” by “1.6 times”.		N/A
8.5.4.3.1	Only three-phase stationary equipment rated more than AC 200 V can be considered as being for use in locations where children are not likely to be present, when complying with Clause F.4.		N/A
8.5.4.3.2	For equipment installed where children may be present, an instructional safeguard shall be provided by easily understandable wording in accordance with Clause F.5, except that element 3 is optional.		N/A
8.5.4.3.4	The media destruction device is tested according to Clause V.1.2 with applicable jointed test probes to the opening. And then the wedge probe per Figure V.4 shall not contact any moving part.		N/A
8.5.4.3.5	The wedge probe of Figure V.4 and applicable jointed test probes specified in Clause V.1.2 shall not contact any moving part. Instructional safeguard shall not be used instead of equipment safeguard for preventing access to hazardous moving parts.		N/A
F.3.5.1	When the mains socket-outlet is configured in accordance with JIS C 8282 series, JIS C 8300 or JIS C 8303, the assigned current or power shall be marked. If the voltage of the socket-outlet is the same as the mains voltage, the voltage need not be marked. Instructional safeguard of Class 0I equipment shall be provided with an instructional safeguard in accordance with Clause F.5 when a mains socket-outlet as specified in JIS C 8282 series, JIS C 8300 or JIS C 8303 to which class I equipment can be connected is provided in accordance with Clause G.4.2A except for the cases where the socket-outlet is accessible only to skilled persons.		N/A
F.3.5.3	If the fuse is necessary for the safeguard function, the symbols indicating pre-arcing time-current characteristic shall be included.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
F.3.6.1A	Marking for class 0I equipment The requirements of Clauses F.3.6.1.1 and F.3.6.1.2 shall be applied to class 0I equipment. For class 0I equipment, a marking of instructions shall be provided regarding the earthing connection. In addition to the above, for class 0I equipment, an instruction to connect earthing before and disconnect earthing after the connection of supply conductors shall be marked on the visible place of the main body or shall be in the text of an accompanying document.		N/A
F.3.6.2	Symbols, IEC 60417-5172 (2003-02) or IEC 60417-6092 (2011-10), shall not be used for class I equipment or class 0I equipment.		N/A
F.3.8A	Attention marking for aging deterioration of CRT television Year of manufacture, standard usage period by design according to JIS C 9921-5 and cautionary statement for possible risks of aging deterioration when used beyond the specified period shall be marked on CRT television except for industrial use CRT television.		N/A
F.4	For audio equipment with terminals classified as ES3 in accordance with Table E.1, and for other equipment with terminals marked in accordance with F.3.6.1 and F.3.6.1A, the instructions shall require that the external wiring connected to these terminals shall be installed by a skilled person, or shall be connected by means of ready-made leads or cords that are constructed in a way that would prevent contact with any ES3 circuit. For class 0I equipment provided with independent main protective earthing terminal, where the cord for the protective earthing connection is not provided in the package of the equipment, if the protective earthing connection is made by instructed person or skilled person, the suitable installation instruction for the protective earthing connection shall be provided.		N/A
G.3.2.1	The thermal link when tested as a separate component, shall comply with the requirements of JIS C 6691 or have properties equivalent to or better than that.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.3.4	Except for devices covered by Clause G.3.5, overcurrent protective devices used as a safeguard shall comply with the applicable JIS or IEC standard in accordance with 4.1.2 or shall have equivalent or better properties. Such a protective device shall have adequate breaking (rupturing) capacity to interrupt the maximum fault current (including short-circuit current) that can flow.		N/A
G.4.1	This requirement does not apply to connectors covered in Clauses G.4.2 and G.4.2A.		N/A
G.4.2	Mains connectors, mains plugs and socket-outlets shall comply with JIS C 8283 series, JIS C 8285, IEC 60309 series, JIS C 8282 series, JIS C 8300, JIS C 8303, or have equivalent or better properties. A power supply cord set provided with appliance connector that can fit appliance inlet complying with JIS C 8283-1 shall comply with JIS C 8286. Construction shall prevent mechanical stress not to transmit to the soldering part of appliance inlet terminal. When an equipment is rated not more than 125 V and all of the following are met, Type C14 and C18 appliance inlet complying with JIS C 8283-3 can be considered as rated 15 A. – The temperature of appliance inlet does not exceed the value specified in JIS C 8283-1 under the most unfavourable normal operating condition as specified in Clause B.2.1. – "Use only designated cord set attached in this equipment" or equivalent text is described in the operating instruction. If the cord set is not provided in the package of the equipment, suitable information regarding to the cord set is described in the operating instruction.		N/A
G.4.2A	Mains socket-outlet and interconnection coupler provided with the class II, class I and class 0I equipment respectively		N/A
G.7.1	A mains supply cord need not include the protective earthing conductor for class 0I equipment provided with independent protective earthing conductor.		N/A
G.7.2 Table G.7	Cross-sectional area of equipment rated up to and including 3 A shall be 0.75 mm^2.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

IEC62368_1F - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
G.7.6.1 Table G.9	The cross-sectional area of mains cords according to JIS C 3010 may comply with relevant Japanese wiring regulation. For cables other than those complying with JIS C 3662 series or JIS C 3663 series, the terminals shall be suitable for the size of the intended cables.		N/A

Disclaimer: This document is controlled and has been released electronically.
Only the version on the IECEE Website is the current document version.

Attachment

Test Report issued under the responsibility of:

TÜVRheinland®

TEST REPORT
IEC 60825-1
Safety of laser products -
Part 1: Equipment classification and requirements

Report Number. ..... :	CN2539BT 001
Date of issue ..... :	See main report
Total number of pages ..... :	19
Name of Testing Laboratory preparing the Report ..... :	TÜV Rheinland (Shanghai) Co., Ltd.
Applicant's name ..... :	See main report
Address ..... :	See main report
Test specification:	
Standard ..... :	IEC 60825-1:2014
Test procedure ..... :	CB Scheme
Non-standard test method ..... :	N/A
TRF template used ..... :	IECEE OD-2020-F1:2021, Ed.1.4
Test Report Form No. ..... :	IEC60825_1G
Test Report Form(s) Originator .... :	OVE
Master TRF ..... :	Dated 2021-10-05

Copyright © 2021 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description..... :		S10Ultra-Lite Solid-State Lidar	
Trade Mark(s) ..... :		See main report	
Manufacturer ..... :		See main report	
Model/Type reference..... :		LXPS-SA7A0-8CE-940A	
Ratings..... :		See main report	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):			
☒	**CB Testing Laboratory:**	See main report	
Testing location/ address ..... :		See main report	
Tested by (name, function, signature)..... :		See main report	
Approved by (name, function, signature) .. :		See main report	
☐	**Testing procedure: CTF Stage 1:**	N/A	
Testing location/ address ..... :			
Tested by (name, function, signature)..... :			
Approved by (name, function, signature) .. :			
☐	**Testing procedure: CTF Stage 2:**	N/A	
Testing location/ address ..... :			
Tested by (name + signature)..... :			
Witnessed by (name, function, signature) . :			
Approved by (name, function, signature) .. :			
☐	**Testing procedure: CTF Stage 3:**	N/A	
☐	**Testing procedure: CTF Stage 4:**	N/A	
Testing location/ address ..... :			
Tested by (name, function, signature)..... :			
Witnessed by (name, function, signature) . :			
Approved by (name, function, signature) .. :			
Supervised by (name, function, signature) :			

List of Attachments (including a total number of pages in each attachment):

See main report.

Summary of testing:

Test conclusion: Class 1 laser product.

Tests performed (name of test and test clause):	**Testing location:**
Pre-production samples without serial number. All applicable tests as described in the compliance checklist were performed at model LXPS-SA7A0-8CE-940A. See the measurement section for details. The tests have been performed according to the following sequence: all applicable clauses. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.	See main report.

Summary of compliance with National Differences (List of countries addressed):

EU Group Differences, CA

Explanation of used codes: CA=Canada.

☒ **The product fulfils the requirements of**

EN 60825-1:2014+A11:2021.

CAN/CSA-E60825-1:15

Use of uncertainty of measurement for decisions on conformity (decision rule) :

☒ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

MS-0041609, 2020-02-19, Appendix 7 LASER power

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

<Laser Warning Label>



Laser Safety

1.Invisible laser radiation during operation-avoid eye exposure.

2.Class 1 laser product-complies with IEC 60825-1:2014

See main report for more details on labels.

Test item particulars..... :	See page 2.
Classification of installation and use..... :	Class III
Supply Connection ..... :	See page 2.
Possible test case verdicts:	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
Testing.....:	
Date of receipt of test item .....:	2025-11-26
Date (s) of performance of tests .....:	2025-12-02

General remarks:

"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.
Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

Manufacturer's Declaration per sub-clause 4.2.5 of IECEE 02:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided ..... :	☐ **Yes** ☒ **Not applicable**

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies) ..... : See main report

General product information and other remarks:

Subject model, S10 Ultra Lite is an All-Solid-State LiDAR, consists of two 940nm vcsel chips, which are in scope of this standard.
The two vcsel chips are set to emit at the same power simultaneously, which means the output power of each chip is one half of the measured data.

See main report for more product details.


IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict
4	**CLASSIFICATION PRINCIPLES**		
4.3	Classification rules		---
4.3 a	Radiation of a single wavelength	Single wavelength used.	P
4.3 b	Radiation of multiple wavelengths		N/A
	1) Laser product emits at two or more wavelengths shown as additive in Table 1		N/A
	2) Laser product emits at two or more wavelengths not shown as additive in Table 1		N/A
4.3 c	Radiation from extended sources (see 5.4.3)	See measurement table.	P
4.3 d	Non-uniform, non-circular or multiple apparent source		N/A
4.3 e	Time bases		---
	1) 0,25 s		N/A
	2) 100 s	Select for Class 1 evaluation.	P
	3) 30000 s		N/A
4.3 f	Repetitively pulsed or modulated lasers	See measurement table.	P
	1) Any single pulse	See measurement table.	P
	2) Average power for pulse trains	See measurement table.	P
	3) Pulse duration $t \leq T_i$ ..... : Number of pulses N and C_5 ..... :	See measurement table.	P
	3) Pulse duration $t > T_i$ ..... : Number of pulses N and C_5 ..... :		N/A
4.4	Laser products designed to function as conventional lamps.	Not such laser product.	N/A
	α measured at 200 mm distance from closest point of human access (α > 5 mrad).		N/A
	Un-weighted radiance L measured at 200 mm distance (comparison with $L_T = 1\ MWm^{-2}sr^{-1}/\alpha$) under reasonably foreseeable single fault conditions.		N/A
	Evaluation of emission according to IEC 62471 series (optional): Standard applied (IEC 62471 series)……,…..….: Risk Group…….……..….: Labelling…… ...: Classification of product based on accessible laser radiation (if no laser radiation accessible: Class 1).		N/A

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict
5	**DETERMINATION OF THE ACCESSIBLE EMISSION LEVEL and PRODUCT CLASSIFICATION**		
5.1	Tests		---
	Compliance under reasonably foreseeable single fault conditions.	Single fault condition considered.	P
5.3	Determination of the class of the laser product ... : For Class 1C: vertical safety standard applied with requirements for Class 1C.		N/A
5.4	Measurement geometry		---
5.4.1	General		---
5.4.2	Default (simplified) evaluation		N/A
	Conditions applied ..... :		N/A
	Aperture diameter ..... :		N/A
	Reference point : ..... :		N/A
	Measurement distance ..... : (for each condition)		N/A
5.4.3	Evaluation condition for extended sources		P
	Conditions applied ..... :	Due to the equipment emitted beam with a certain angle of divergence, only Condition 3 applied.	P
	Most restrictive position ..... : (distance from reference point)	Physical location of the emitting chip.	P
	Angular subtense of the apparent source α and C_6: (for each condition)	See measurement table.	P
5.4.3 a	Aperture diameters (for each condition). ..... :	7mm.	P
5.4.3 b	Angle of acceptance (for each condition)……..:		N/A

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict


Measured accessible laser radiation and comparison with AEL:

1. Wavelength:
938.68 nm

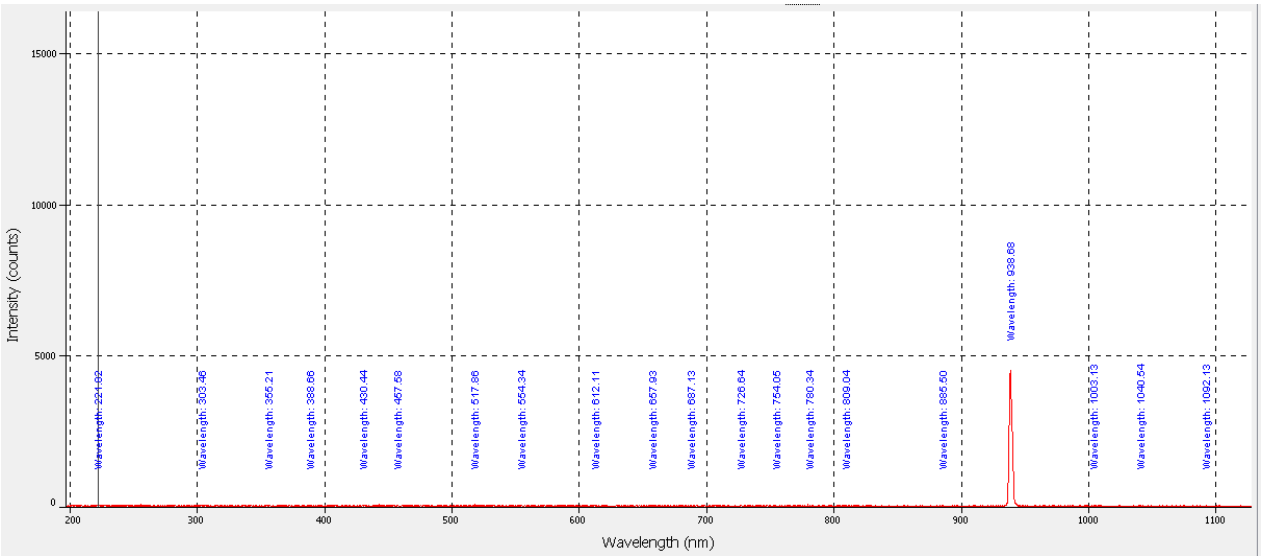


2. Pulse width and emission duration:

The EUT emits pulse packet at the frequency of 10.00 Hz. During the packet, two different pulse trains were emitted.

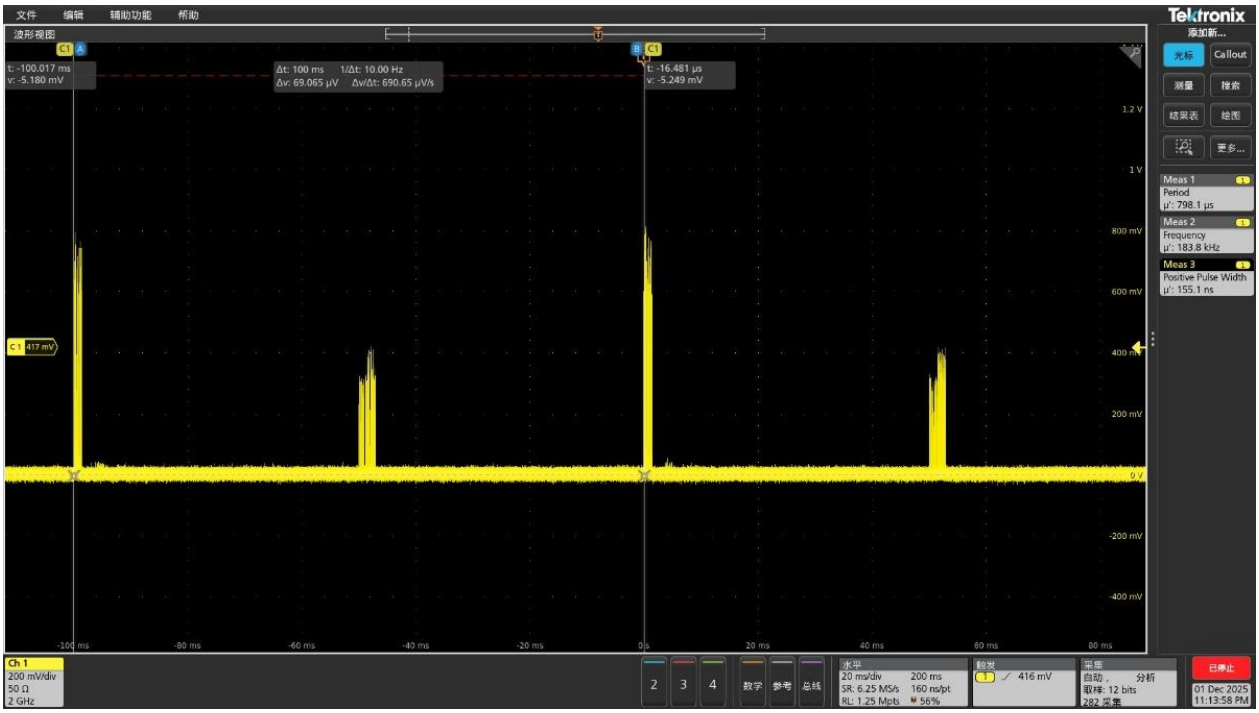


IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict

Train A was emitted at the frequency of 20.00 Hz and consists of two kinds of pulse group with the same width of 1.5 ms.

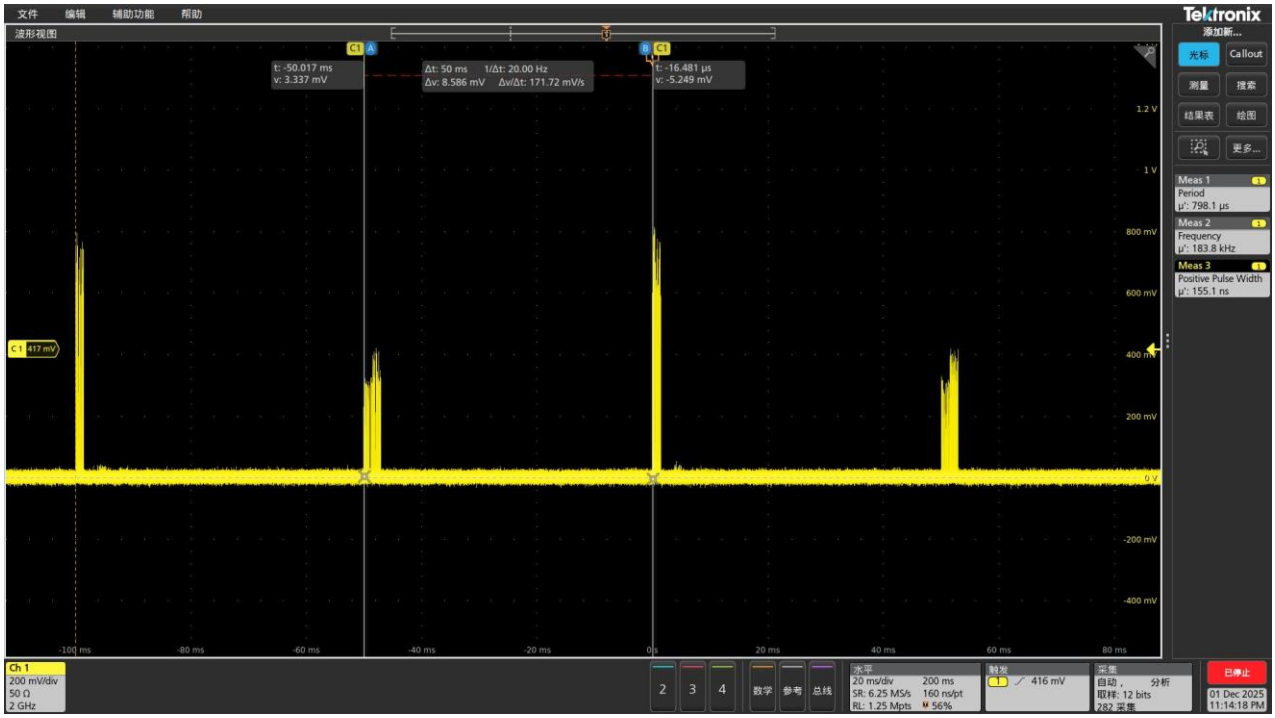


For Group 1, the pulse frequency is 1.366 MHz, the pulse width is 5.633 ns.

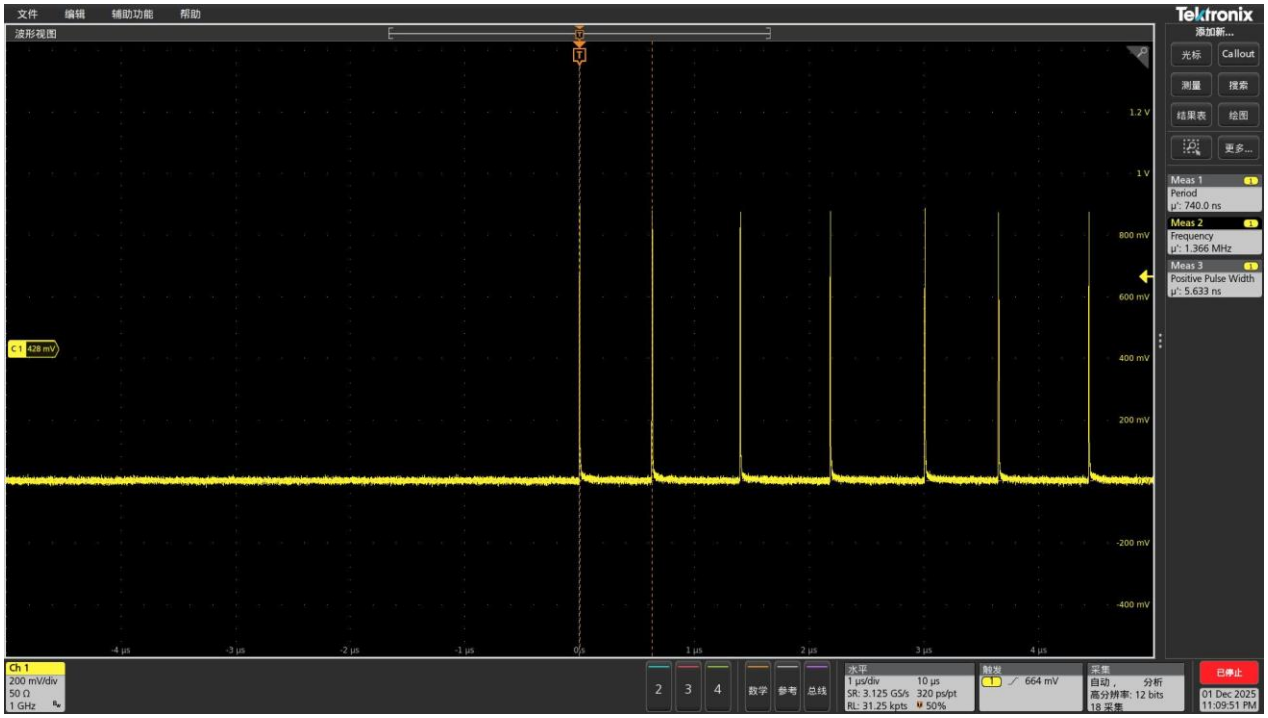

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict

For Group 2, the pulse frequency is 1.346 MHz, the pulse width is 3.215 ns

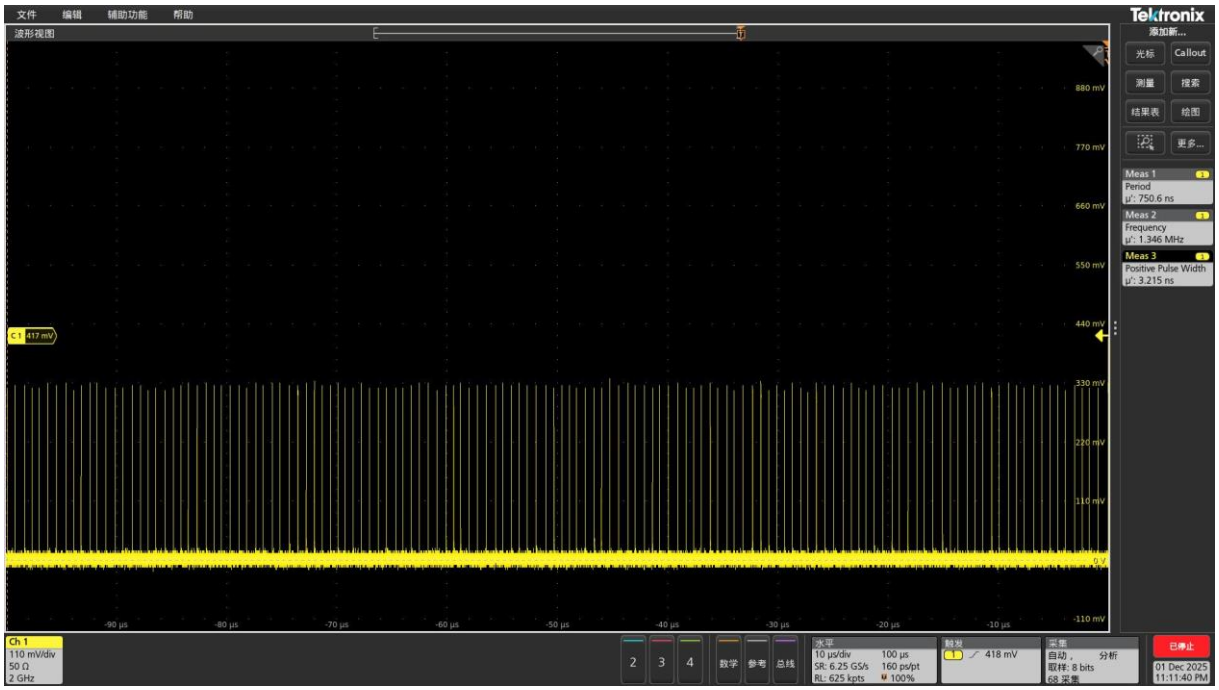

Train B was emitted at the frequency of 20.00 Hz, and width of 1.5 ms. And for each single pulse in Train B, the sequence was equal to Group 1 in Train A on time domain.



IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict

3. Emission Level:

Angular subtense measurement:

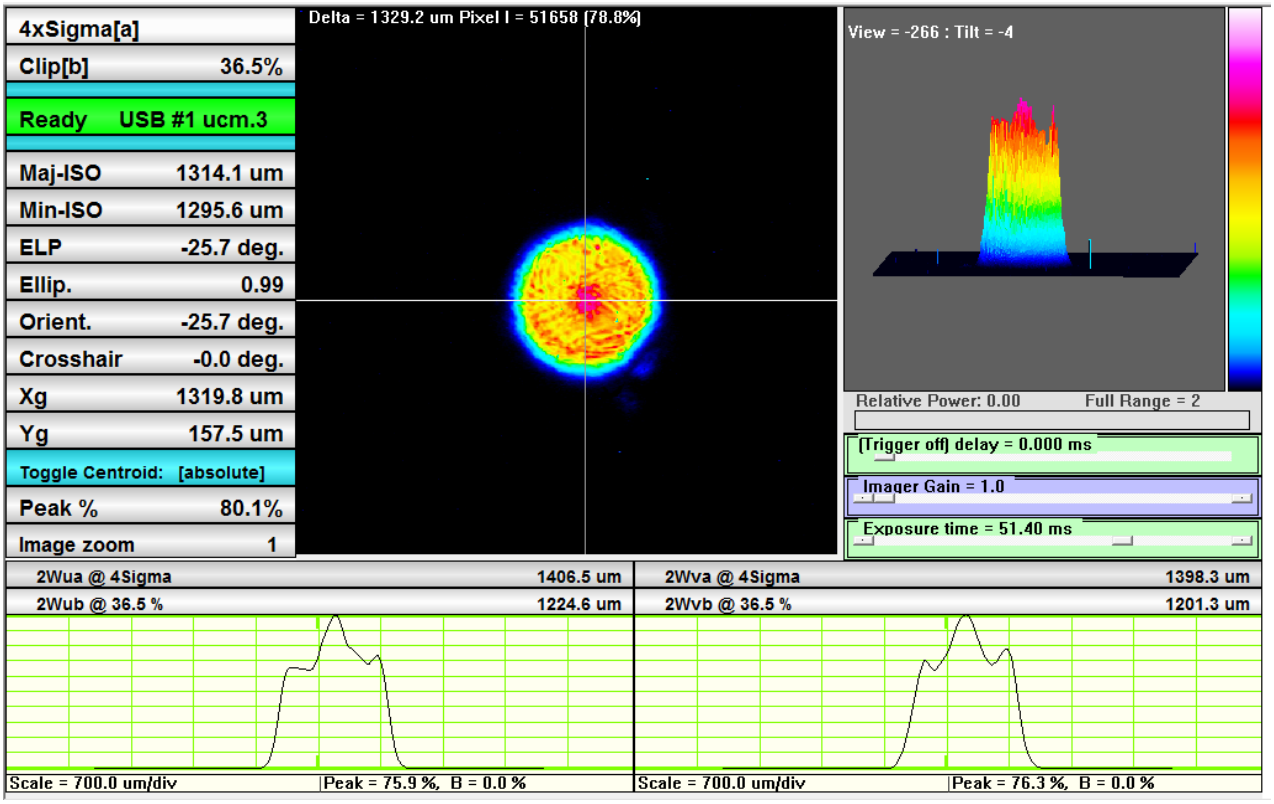


Image size = 1224.6 μm x 1201.3 μm

Image distance = 135.10 mm

α for AEL_{single} = 5 mrad

α for AEL_T = 8.98 mrad

C_6 for AEL_{single} = 3.33

C_6 for AEL_T = 5.99

C_4 = 3.00

T_2 = 11.91 s

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict

For normal condition:

Additional measured and calculated data			
Name	Symbol	Value	Unit
Angular subtense (Alpha) for AEL_{single}	α	5	mrad
Angular subtense (Alpha) for AEL_T	α	8.98	mrad
Packet frequency	F_{packet}	10.00	Hz
Time width for each pulse group	T_{packet}	1.5	ms
Frequency for single pulse in Group 1	f	1.366	MHz
Duration for single pulse in Group 1	t	5.633	ns
Frequency for single pulse in Group 2	f	1.346	MHz
Duration for single pulse in Group 2	t	3.215	ns
Pulse number during T_i	N_{Ti}	6.83	/
Pulse number during 1s	N_{1s}	61170	/
Measurement emission duration	T_2	11.91	s
Pulse number during T_2	N_{T2}	728535	/
Time base for Class 1 evaluation	T	100	s
Pulse number during T	N_T	6117000	/

Condition	Measure Emission Level of Laser	λ (nm)	Accessible Emission Level (thermal)
			Class 1
Condition 3: d=7 mm, r=100 mm	$P_{average}$ = 1.093 mW $E_{single} = P_{average}$ x 0.5 x 1s / N_{1S} = 8.93 nJ	938.68 (peak)	$AEL_{single} = 7.7 \times 10^{-8}\ C_4 C_6$ J = 769.23 nJ $AEL_T = 7 \times 10^{-4}\ C_4\ C_6\ T_2^{-0.25}$ W = 6.77 mW $AEL_T = 7 \times 10^{-4}\ C_4\ C_6\ t^{0.75}$ J = 80.65 mJ $AEL_{s.p.T} = AEL_T / N_{T2}$ = 110.70 nJ $AEL_{ti} = 7 \times 10^{-4}\ t_i^{0.75}\ C_4 C_6$ J = 739.42 nJ $AEL_{s.p.Train} = AEL_{ti} * C_5 / N_{ti}$ = 43.30 nJ C_4 = 3.00 C_5 = 0.4 (for $t \le T_i$, N > 600) C_6 for AEL_{single} = 3.33 C_6 for AEL_T = 5.99
Expanded uncertainty: ± 2.1%			

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict

4. Single fault condition:

Component No.	Abnormal Condition	Power	Observation
Q13/Q1	SC	---	Laser output dropped down, no hazards to laser.
C17/C69	SC	---	Laser output dropped down, no hazards to laser.
R12/R52	SC	1.093 mW - 1.093 mW	Laser output worked normally, no hazards to laser.
C20/C70	SC	1.093 mW - 0	Laser output shut down gradually, no hazards to laser.
Remark : SC=Short-Circuit			

5. Potential hazard to the skin or anterior parts of the eye:

Class 3B AEL = 0.5 W

Measured laser power at 0mm distance with 3.5mm aperture: 45.8 mW max.

Conclusion:

The measured laser power and energy under normal and abnormal condition does not exceed the Class 1 AEL, therefore the product is classified as Class 1 laser product.

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict
6	**ENGINEERING SPECIFICATIONS**		
6.2	Protective housing		---
6.2.1	General		---
	Protective housing prevents access to energy levels in excess of the AEL for Class 1.	Class 1 laser product.	P
	Protective housing prevents access to energy levels equivalent to Class 4 and withstands exposures under reasonably foreseeable single fault conditions.		N/A
	Maintenance of Class 1, 1C, 1M, 2, 2M, or 3R (access to emissions of Class 3B or 4 is prevented).	Class 1 laser product.	P
	Maintenance of Class 3B product (access to emission of Class 4 is prevented).		N/A
6.2.2	Service		P
6.2.3	Removable laser system (laser system complies with requirements of Clauses 6 and 7).	Not removable laser system.	N/A
6.3	Access panels and safety interlocks		---
6.3.1	Panel is intended to be removed during operation (or maintenance) and would give access to higher energy levels (see Table 13).	No access panel and safety interlocks.	N/A
	Accessible emission (after removal of the panel) corresponds to product Class (designated by “X” in Table 13)		N/A
	Emission through the opening if interlocked panel of Class 1, 1C, 1M, 2, or 2M is removed (Emission < AEL of Class 1M or 2M).		N/A
	Emission through the opening if interlocked panel of Class 3R, 3B, or 4 is removed (Emission < AEL of Class 3R).		N/A
	Requirements regarding reasonably foreseeable single fault condition.		N/A
6.3.2	Override mechanism		N/A
	Behaviour of override in operation when the panel is replaced.		N/A
	Visible or audible warning for override mode.		N/A
6.4	Remote interlock connector	Not remote interlock connector.	N/A
6.5	Manual reset		N/A
6.6	Key control		N/A
6.7	Laser radiation emission warning		---
6.7.1	Laser product is a 3R (λ<400 nm; λ>700 nm), 1C, 3B or 4 laser systems.		N/A

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict
6.7.2	Audible or visible warning.		N/A
	Warning is failsafe or redundant.		N/A
	Viewing of the visible warning does not require exposure to emissions > AEL for Class 1M and 2M.		N/A
6.7.3	Operational control and laser aperture are provided with a warning device when they are separated more than 2 m from warning device.		N/A
6.7.4	Visible indication of output aperture if laser emission may be distributed through more than one output.		N/A
6.7.5	Switch for handheld Class 3R device must be depressed for emission (in lieu of emission indicator).		N/A
6.8	Beam stop or attenuator		N/A
6.9	Controls		P
6.10	Viewing optics	No viewing optics used.	N/A
	a) Human access to laser radiation in excess of Class 1M prevented when the shutter is opened or attenuation varied.		N/A
	b) Opening of the shutter or variation of the attenuation prevented when exposure to laser radiation in excess of Class 1M is possible.		N/A
6.11	Scanning safeguard	Not such device.	N/A
6.12	Safeguard for Class 1C products	Not such device.	N/A
	a) Human access to laser radiation in excess of AEL for Class 1 measured under Condition 3 is prevented.		N/A
	b) Human access to laser radiation in excess of AEL for Class 3B measured through 3,5 mm aperture at 5 mm distance from applicator is prevented.		N/A
6.13	Walk-in access		N/A
	a) Means provided so that any person inside the housing can prevent activation of Class 3B or 4 laser hazards.		N/A
	b) A warning device provides adequate warning of emission to any person within the housing.		N/A
	c) Where “walk-in” access during operation is intended or reasonably foreseeable, emission of laser radiation that is equivalent to Class 3B or 4 while someone is present inside the enclosure of Class 1, Class 2 or Class 3R product is prevented by engineering means.		N/A
6.14	Environmental conditions		---
	- climatic conditions		N/A

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- vibration and shock		N/A
6.15	Protection against other hazards		---
6.15.1	Non-optical hazards (product safety standard)	See main report.	N/A
	- electrical hazards;		N/A
	- excessive temperature;		N/A
	- spread of fire from the equipment;		N/A
	- sound and ultrasonics;		N/A
	- harmful substances;		N/A
	- explosion;		N/A
6.15.2	Collateral radiation	No collateral radiation.	N/A
6.16	Power limiting circuit	The power limiting circuit is applied.	P

7	**LABELLING**		
7.1	General		---
	Labels durable, permanently affixed	Provided in the specification.	N/A
	Labels clearly visible	Provided in the specification.	P
	Reading of labels is possible without exposure to laser radiation in excess of AEL for Class 1.	Class 1 laser product.	P
	Colour combination		P
	Labelling impractical due to the size or design of the product.	Provided in the specification.	P
	Warning label – Hazard symbol (Figure 3)		P
7.2 - 7.7	Text on explanatory label or pictogram (laser class, warning text)	Class 1 laser product.	P
7.8	Aperture label		N/A
7.9	Radiation output and standards information		---
	Max output of laser radiation .....:		N/A
	Pulse duration .....:		N/A
	Emitted wavelength(s) .....:	Provided in the specification.	P
	Name and publication date of the standard.....:	Provided in the specification.	P
7.10	Labels for access panels		---
7.10.1 a) – f)	Labels for panels - warning wording used .....:		N/A
7.10.2	Labels for safety interlocked panels - Warning wording used .....:		N/A

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict
7.11	Warning for invisible laser radiation .....:		N/A
7.12	Warning for visible laser radiation .....:		N/A
7.13	Warning for potential hazard to the skin or anterior parts of the eye - warning wording used.....:		N/A

8	**OTHER INFORMATIONAL REQUIREMENTS**		
8.1	Information for the user		---
	a) adequate instructions for assembly, maintenance and safe use and description of the classification limitations, if appropriate.	Specification is provided.	P
	b) additional warning for Class 1M and 2M		N/A
	c) laser beam parameters for radiation above the AEL of Class 1	Class 1 product.	---
	• Wavelength .....:	Provided in the specification.	P
	• Beam divergence .....:		N/A
	• Pulse pattern .....: (pulse duration, repetition rate, …)		N/A
	• Maximum power or energy output .....:		N/A
	d) safety instruction for embedded laser products and other incorporated laser products.		P
	e) MPE and NOHD for Class 3B and 4 laser products; For collimated beam Class 1M and 2M lasers the extended NOHD (ENOHD).		N/A
	f) information for the selection of eye protection.		N/A
	g) reproduction of all required labels and warnings.		P
	h) location of laser apertures		N/A
	i) list of controls, adjustments of procedures for operation and maintenance - and warning statement.		P
	j) information (compatibility requirements) about laser energy source if not incorporated.		N/A
	k) additional warning for Class 1, 1M, 2, 2M, and 3R regarding skin or corneal burns.	Accessible emission not exceeds AEL of Class 3B for a 3.5 mm aperture.	N/A
	l) Information for Class 1C products (e.g. warning that repeated application may pose a risk).		N/A
8.2	Purchasing and service information	Provided in the specification.	P
	a) safety classification of each laser product stated in all descriptive material (e.g. brochures).	Provided in the specification.	P

IEC 60825-1			
Clause	Requirement + Test	Result - Remark	Verdict
	b) adequate instructions for servicing available: • warnings and precautions regarding exposure of laser emission above Class 1 • maintenance schedule • list of controls and procedures that could increase accessible emissions • description of displaceable parts • protective procedures for service personnel • reproduction of labels and hazard warnings	Provided in the specification.	P
9	**ADDITIONAL REQUIREMENTS FOR SPECIFIC LASER PRODUCTS**		
9.1	Applicable other parts of the standard series IEC 60825		---
	IEC 60825-2 (Safety of optical communication systems)	Not specific laser products.	N/A
	IEC 60825-4 (Laser guards)		N/A
	IEC 60825-12 (Safety of free space optical communication systems used for transmission of information)		N/A
9.2	Medical laser products: Class 3B and Class 4 medical laser products comply with IEC 60601-2-22		N/A
9.3	Laser processing machines: Comply with IEC/ISO 11553 series.		N/A
9.4	Electric toys: Comply with IEC 62115		N/A
9.5	Consumer electronic products: Comply with IEC 60950 (IT-equipment) or IEC 60065 (AV equipment)	Evaluated in the main report according to IEC 62368-1.	P

	TABLE: Critical components information				P
Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity[1]
See main report.					
Supplementary information: [1)] Provided evidence ensures the agreed level of compliance. See OD-CB2039.					

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT **IEC 60825-1** **EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES** (**Safety of laser products - Part 1: Equipment classification and requirements**)			
Differences according to.....: EN 60825-1:2014+A11:2021			
TRF template used .....: IECEE OD-2020-F2:2020, Ed. 1.1			
Attachment Form No.....: EU_GD_IEC60825_1G **Attachment Originator** .....: TÜV Rheinland LGA Products GmbH **Master Attachment** .....: Dated 2021-11-05			
Copyright © 2021 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	CENELEC COMMON MODIFICATIONS (EN)		—
1	**Scope and object**		—
	In Clause 1, replace the existing text: "This Part 1 describes the minimum requirements. Compliance with this Part 1 may not be sufficient to achieve the required level of product safety. Laser products may also be required to conform to the applicable performance and testing requirements of other applicable product safety standards. NOTE 3 Other standards may contain additional requirements. For example, a Class 3B or Class 4 laser product may not be suitable for use as a consumer product." Where a laser system forms a part of equipment which is subject to another IEC product safety standard, e.g. for medical equipment (IEC 60601-2-22), IT equipment (IEC 60950 series), audio and video equipment (IEC 60065), audio-video and IT equipment (IEC 62368-1), equipment for use in hazardous atmospheres (IEC 60079), or electric toys (IEC 62115), this Part 1 will apply in accordance with the provisions of IEC Guide 1042 for hazards resulting from laser radiation. If no product safety standard is applicable, then IEC 61010-1 may be applied." *with the following:*		—
	"This Part 1 describes requirements that are considered sufficient to achieve the required level of product safety for general laser products with respect to hazards to the eye and skin posed by laser radiation, provided that consumer laser products comply with EN 506891 (see 9.5 in EN 60825-1:2014/FprAA:2020). Also, as required in 5.3 b) of EN 60825-1, that laser products classified as Class 1C comply with the respective applicable part of either the EN 60601 series or the EN 60335 series that contains requirements for the safe exposure of the skin (note that the exposure of the skin is not necessarily limited to the MPE values of the skin), if applicable, as well as specific requirements for the performance and testing of the safeguard that prevents hazardous emission towards the eye. Depending on the type of the product, laser products such as for example medical lasers, machines or toys can be required to conform to the applicable performance and testing requirements of their relevant product safety standards. NOTE 3 See 3.92 for "general laser product". Where a laser system forms a part of equipment which is subject to another IEC product safety standard, e.g. for medical equipment (IEC 60601-2-22), IT equipment (IEC 60950 series), audio and video equipment (IEC 60065), audio-video and IT equipment (IEC 62368-1), electrical equipment for measurement, control, and laboratory use (IEC 61010-1), equipment for use in hazardous atmospheres (IEC 60079), or electric toys (IEC 62115), this Part 1 will apply in accordance with the provisions of IEC Guide 1042 for hazards		—

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	resulting from laser radiation."		
3	**Terms and definitions** *In Clause 3, add the following terms and their definitions:*		—
3.9.1	**consumer laser product** any product or assembly of components that: (a) is intended for consumers, or likely to be used by consumers under reasonably foreseeable conditions even if not intended for them; and (b) constitutes or incorporates a laser or laser system	Considered	P
3.9.2	**general laser product** laser product that does not fall within the scope of another EN standard that addresses the safety of a specific category of laser products Note 1 to entry: Examples of products where such other EN Standards exist are medical lasers (EN 60601-2-22), electric toys (EN 62115) or laser processing machines (EN ISO 11553-1, EN ISO 11553-2). Note 2 to entry: General laser products are for instance laboratory equipment, laser products for measurements, laser pointers, display lasers and laser illuminated projectors. Note 3 to entry: EN 506891 is not considered as another EN standard that addresses the safety of a specific category of laser products, since it applies to all consumer laser products.“		N/A


IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
4.3	**Classification rules** *In Note 3 of 4.3 c), replace the following text:* "NOTE 3 A source is considered an extended source when the angular subtense of the source is greater than αmin, where αmin = 1,5 mrad. Most laser sources have an angular subtense α less than αmin, and appear as an apparent "point source" (small source) when viewed from within the beam (intra-beam viewing). Indeed a circular laser beam cannot be collimated to a divergence less than 1,5 mrad if it is an extended source, thus any laser where a beam divergence of 1,5 mrad or less is specified cannot be treated as an extended source. For a small source, α is set to αmin = 1,5 mrad and *C*6 = 1." *with:* "NOTE 3 An apparent source is considered an extended source when the angular subtense of the apparent source (i.e. the angular subtense of the image of the source) is greater than αmin, where αmin = 1,5 mrad (note that different accommodation states as well as different positions in the beam have to be considered for the classification of extended sources). Most laser sources have an angular subtense α less than αmin, and appear as an apparent "point source" (small source) when viewed from within the beam (intra-beam viewing). Indeed, if a laser beam is to qualify as an extended source, it cannot be collimated to a divergence less than 1,5 mrad unless it is astigmatic (i.e. could be collimated in one dimension only) or scanning. Thus any non-scanning circularly symmetric laser beam, where a beam divergence of 1,5 mrad or less is specified, cannot be treated as an extended source, since accommodation to infinity for intrabeam viewing of such a source produces a retinal image that subtends an angle of less than 1,5 mrad. Also, more generally, any circular, non-scanning high quality Gaussian beam (TEM00) with a beam quality factor M2 equal or close to unity is associated to a small apparent source, as either the beam waist subtends an angular subtense smaller than 1,5 mrad or the divergence is smaller than 1,5 mrad. For a small source, α is set to αmin = 1,5 mrad and *C*6 = 1. See also definitions 3.7, 3.10, 3.36, 3.42. A frequent mistake is to associate the beam diameter, or the beam profile, at the laser aperture with the apparent source; the laser aperture as such has no special distinctiveness that is related to the apparent source. Examples of designs that might constitute an extended source are: transmissions through a diffusor, transmissions through a diffractive optical element (DOE), partially coherent beams (i.e. beams with low beam quality and therefore higher values of the beam quality factor M2), scanned emission, fibres, and astigmatic beams (since the eye cannot accommodate to both waists at the same time). Measurements of the image of the apparent source are expected to be performed with sufficient accuracy, typically with a laser beam profiler CCD camera. As an alternative to characterizing the angular subtense of the apparent source (note that different accommodation states are expected to be considered, as well as different positions in the beam, see 5.4.3), *C*6 can be set to unity (simplified evaluation, see 5.4.2)."		—

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
5.3	**Determination of the class of the laser product** *In subclause 5.3, replace the existing text of footnote d of Table 3, footnote f of Table 4, footnote d of Table 6 and footnote c of Table 7:* "In the wavelength range between 1 250 nm and 1 400 nm, the upper value of the AEL is limited to the AEL value for Class 3B." *with:* "In the wavelength range between 1 250 nm and 1 400 nm, two additional limitations apply. The value of the AEL in the table above is limited to the AEL value for Class 3B. The accessible emission, determined with the specified aperture stop, is limited by the following values (these limits are derived from the MPE of the skin and are required as an additional limit to protect the anterior parts of the eye). This limitation for the eye is to be treated as additive with the spectral region of 1400 nm to 10^6 nm listed in Table 1. For $t < 10^{-9}$ s: $7{,}9 \times 10^5$ W — Aperture stop diameter: 1 mm For 10^{-9} s ≤ $t < 10^{-7}$ s: $7{,}9 \times 10^{-4}$ J — Aperture stop diameter: 1 mm For 10^{-7} s ≤ $t <$ 0,35 s: $4{,}3 \times 10^{-2}\ t^{0{,}25}$ J — Aperture stop diameter: 1 mm For $t \geq$ 0,35 s: 0,1 W — Aperture stop diameter: 0,35 s ≤ $t <$ 10 s: $1{,}5\ t^{3/8}$ mm $t \geq$ 10 s: 3,5 mm		—

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
6.2.1	**General** *In 6.2.1, replace the existing first paragraph:* "Each laser product shall have a protective housing which, when in place, prevents human access to laser radiation (including errant laser radiation) in excess of the AEL for Class 1, except when human access is necessary for the performance of the function(s) of the product." *with:* "Each laser product shall have a protective housing which, when in place, prevents human access to laser radiation (including errant laser radiation) in excess of the AEL for Class 1, unless human access to laser radiation is necessary for the performance of the function(s) of the product. Where human access to radiation levels above the AEL for Class 1 is necessary, the product shall be in the lowest feasible class commensurate with this function. NOTE Where such human access is necessary only at certain times and not during routine operation of the product (e.g. to allow specific maintenance procedures, which are described in the information for the user, to be undertaken by the user) the protective housing prevents human access to laser radiation in excess of the AEL for Class 1 during routine operation. This requirement for a protective housing does not mean that the product needs to meet all the requirements for, and to be classified as, Class 1. This is because classification as Class 1 cannot be achieved when access to levels of laser radiation of Class 3B or Class 4 is necessary during maintenance procedures."	Considered	P

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
9.5	**Consumer electronic products** *Replace the entire text of subclause 9.5 with the following:* "Consumer laser products shall comply with applicable requirements for laser products of their class as well as with EN 506891. In addition, these products may be subject to specific safety standards such as EN 62368-1 (AV/ICT equipment). Products that are classified as Class 1C need to comply with the requirements of the respective specific vertical standard of the EN 60335 series or the EN 60601 series. NOTE EN 506891 will be made available after the publication of EN 60825-1:2014/FprAA:2020. In the period of time until EN 506891 is published, there are no specific requirements for consumer products. It is noted that some EU member states have issued guidance documents and/or legal requirements that apply to consumer laser products and that are not harmonized amongst EU member states."	Considered	P
ZB	**ANNEX ZB**		—
ZB.1	**General remarks** This informative annex is added to EN 60825-1:2014 in order to publish the content of the IEC Interpretation Sheets IEC 60825-1:2014/ISH1:2017 and IEC 60825-1:2014/ISH2:2017 by CENELEC. The content is published as an annex to EN 60825-1, because the publication type "Interpretation Sheet" is not available at CENELEC level. Because there are no page-number limitations for an annex (contrary to an Interpretation Sheet), the text of the IEC ISH1 and ISH 2 has been somewhat extended in order to increase the readability and clarity.		—
ZB.2	**Subclause 4.3 Classification rules (IEC 60825-1:2014/ISH1:2017)**		—
ZB.2.1	**General remarks** This subclause ZB.2 contains the text of ISH1; some examples were added for clarity. For some complex extended sources or irregular temporal emissions, the application of the rules of 4.3 may require clarification. In this subclause ZB.2, 4.3 (Classification rules) is clarified. NOTE 1 For the purpose of this annex, the abbreviation "AE" is used for "accessible emission". NOTE 2 The clarifications also apply in an equivalent way to MPE analysis, i.e. for Annex A.		—

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB.2.2	**Subclause 4.3 c) (Radiation from extended sources)** When using the default (simplified) evaluation method (5.4.2) for wavelengths ≥ 400 nm and < 1 400 nm, the angle of acceptance may be limited to 100 mrad for determining the accessible emission to be compared against the accessible emission limit, except in the wavelength range 400 nm – 600 nm for durations longer than 100 s where the circular-cone angle of acceptance is not limited. When evaluating the emissions for comparison to the Class 3B AELs, the angle of acceptance is not limited.		N/A
ZB.2.3	**Subclause 4.3 d) (Non-uniform, non-circular or multiple apparent sources)** In 4.3 d), for comparison with the thermal retinal limits, the requirement to vary the angle of acceptance in each dimension might appear to contradict the labelling in Figure 1 and Figure 2 of 5.4.3 where the field stop is labelled as circular.		N/A
ZB.2.4	**Subclause 4.3 f) 3); determination of α** The parameter αmax is a function of emission duration, i.e. αmax(*t*). For an analysis of pulsed emission and extended sources, αmax(*t*) limits both the value of α for the determination of *C*6(α) as well as the angle of acceptance γ for the determination of the accessible emission (see 4.3 c) and d) and subclause ZB.2.3 of this amendment). In this process, αmax(*t*) is determined for the same emission duration *t* that is used to determine AEL(*t*) (i.e. the pulse duration or the pulse group duration for 4.3 f) 3) and the averaging duration for 4.3 f) 2), respectively). However, the parameter α is also used in 4.3 f) 3) in the criteria to determine which *C*5 is applied to AELs.p.train(*t*). For these criteria to determine *C*5, the parameter α is not limited to αmax(*t*) in the same way as for the determination of *C*6 according to 4.3 d). To determine *T*2(α) and in the criteria of 4.3 f) 3) “For α ≤ 5 mrad”, “For 5 mrad < α ≤ αmax”, and, “For α > αmax”, the quantity α is equal to the “long-term” α, i.e. equal to α as determined for a time base of 0,25 s or equal to the value of α of *T*2(α). In the determination of this “long-term” α (applying the method specified in 4.3 d)), αmax = 100 mrad. That is, for *T*2 and these inequalities, α is not limited to a value of αmax(*t*) smaller than 100 mrad, and is therefore the same as the value that applies for the determination of *C*6 for the time base of 0,25 s or 100 s, as applicable. As is generally defined (see 4.3 d)) the arithmetic mean is applied to determine α, i.e. it is not necessary that both dimensions satisfy the criterion ”For α ≤ 5 mrad” independently. For the criterion “Unless α > 100 mrad”, the angular subtense of the apparent source α is not restricted by αmax. For non-uniform (oblong, rectangular, or linear) sources, the inequality needs to be satisfied by both angular dimensions of the source in order for *C*5 = 1 to apply. The value of α determined with αmax = 100 mrad (i.e. the “long-term” α) can also be used for this criterion, alternatively: in this case the criterion is written as “Unless α = 100 mrad”, because for α to become exactly equal to 100 mrad, when applying αmax = 100 mrad, the image of the apparent source has to be larger than 100 mrad in both dimensions.		—

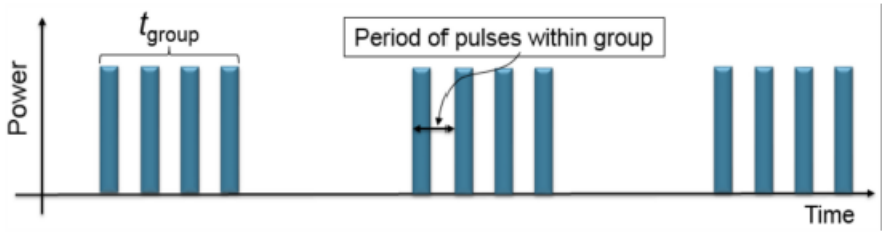IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	Since the “long-term” α is needed for the inequalities in 4.3 f) 3) to determine the applicable *C*5, the usual sequence is as follows. An analysis of the image of the apparent source is performed as given in 4.3 d) while either using AEL(*t* = 0,25 s), or AEL(t = *T*2(α)), depending on the time base. The angle of acceptance (as dimensions of the field of view) is varied between 1,5 mrad and 100 mrad in each dimension. Each field of view is associated to a certain value of *T*2 and therefore AEL(t = *T*2). The accessible emission is also determined for the respective field of view. The result of the process to vary the field of view is the “long-term” α that is associated to the field of view that produces the maximum ratio of AE to AEL. For the case of classification as Class 1, this process to determine the “long-term” α at the same time determines the value of *T*2(α). This “long-term” α is used for *C*6 for AEL(*t* = 0,25 s), or AEL(t = *T*2(α)), respectively, as well as the associated field of view to determine the AE for the comparison with these AEL. Following this step of the determination of the “long-term” α, all applicable shorter emission durations have to be analysed. For the analysis of emission durations less than 0,25 s, the “long-term” α is used to determine the appropriate *C*5 in the equalities of 4.3 f) 3). *T*2(α) is also relevant for the determination of *N* within *T*2(α) or the time base, whichever is shorter.		
ZB.2.5	**Subclause 4.3 f) 3); groups of pulses with group duration longer than *T*i** For non-uniform repetitive pulse patterns, i.e. groups of pulses (see Figure ZB.2 for an example), when α > 5 mrad and the duration of the group of pulses is longer than *T*i, it is not clearly stated how the thermal additivity expressed by requirement 3) of 4.3 f) is applied. For *uniform* (i.e. constant peak power, duration and period) repetitive pulse trains, it is not necessary to analyse the emission patterns in terms of groupings of pulses. When individual pulses are close together, they are thermally grouped and thermally represent one “effective” pulse so that *C*5 also (additionally to analysing the pulse train based on the actual pulses and the average power) applies to these “effective” pulses, where *N* is the number of pulse groups within *T*2 or within the time base, whichever is shorter.  **Figure ZB.2 — Example of three groups of pulses (each group duration is longer than *T*i) where each group is considered as one “effective” pulse and *C*5 is applied to the AEL that applies to the group duration, where *C*5 is determined with the number of pulse groups within the evaluation duration (in the example of the figure *N* = 3)**	—
	For the analysis of pulse groups, the value of AELsingle is determined for the corresponding pulse group duration *t*group. For the determination of *C*5, *N* is the number of pulse groups within *T*2 or the time base, whichever is shorter. The respective value of *C*5 is applied to AELsingle to obtain AELs.p.train that limits the AE of the pulse groups, where AE is the sum of the energy of the pulses contained within the pulse group.		—

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	For the application of *C*5 to groups of pulses, the AEL(*t*group) applicable to the group needs to be determined, as well as the energy per group (AEgroup). For groups of pulses where the peak power of the pulses within the group varies, the group duration is not well defined. In order to simplify the evaluation, *t*group can be set equal to the integration duration for which the energy per group (i.e. AEgroup) was determined; it is not necessary to determine the group duration based on the FWHM criterion, which for groups of pulses with varying peak power is not well defined. By setting *t*group equal to the integration duration that is used to determine AEgroup (expressed as energy), the application of *C*5 to groups of pulses is a simple extension of requirement 2) of 4.3. f) where the average power per group (equal to the energy within the averaging duration *t*average divided by the averaging duration) needs to be below the AEL(*t*average) determined for the duration over which the power was averaged (AEgroup and AEL(*t*group) expressed as power). As is common for the average power requirement, for irregular pulse trains, the averaging duration window (when expressed as energy: the integration duration window) has to be varied in temporal position and duration (for instance, if there are pulses with relatively low energy per pulse at the beginning or the end of the group of pulses, integration durations that exclude those low-energy pulses need to be considered also, not only the total group).		—
	If individual pulses have sufficient temporal spacing (period larger than *T*crit, see below), as a simplified analysis, they need not be considered for an analysis as a pulse group under 4.3 f) 3). The temporal spacing that is necessary for pulses to only be considered separate (and not analysed additionally as a group) depends on the angular subtense of the apparent source and the duration of the pulses *t*pulse within the group. Note that there can be several levels of grouping, so that individual elements (with pulse duration *t*) within the group could themselves be “effective pulses”, i.e. subgroups. When the — pulse group durations (*t*group) are between *T*i and 0,25 s, and — the angular subtense of the apparent source is larger than 5 mrad, and — the period of the pulses (see Figure ZB.2) is shorter than a critical period *T*crit (if *t*pulse < *T*i, the value of *t*pulse is set equal to *T*i; further, for the determination of *T*crit, αmax is determined for *t*pulse, not the group duration) where: for α ≤ αmax: *T*crit = 2 ·*t*pulse where *t*pulse is in seconds for α > αmax: *T*crit = 0,01 α ·*t*pulse0,5 where *t*pulse is in seconds, and α is in mrad, not being limited to αmax then these pulses constitute a pulse group which is treated as effective pulses and *C*5 (where *N* is the number of groups within the time base or *T*2, whichever is shorter) is applied to the AEL applicable to the pulse group. For the determination of AE, αmax is determined using the duration of the evaluated pulse group, *t*group. If one or more of the above conditions are not fulfilled, then the pulses within the group of pulses that is considered to be analysed as “effective pulse” need not be grouped, i.e. the group of pulses does not need to be analysed as one “effective” pulse. Note that if multiple pulses occur within *T*i, the rule as stated in 4.3 f) 3)		—

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	applies in parallel, i.e. they are counted as a single pulse to determine *N* and the energies of the individual pulses that occur within *T*i are added to be compared to the AELs.p.train of *T*i where the corresponding *C*5 for emission durations $t \leq T$i is applied.		
ZB.2.6	**Subclause 4.3 f); simplifications**		
	a) Constant peak power but shorter pulses Depending on the angular subtense of the apparent source, it can be the case that the value of *C*5 is more restrictive for pulses with pulse durations less than *T*i than for pulses with durations longer than *T*i which is against general biophysical principles for cases where the peak power is the same.		N/A
	b) Larger image of apparent source For emission durations exceeding *T*i, due to the step-function of *C*5 at 5 mrad and at αmax, the AEL (as a function of *C*5 and *C*6) can be more restrictive for larger values of the angular subtense of the apparent source as compared to smaller ones, which is contrary to general biophysical principles.		N/A
	c) Using a square aperture stop In some cases, such as 2D scanned laser beams, the use of a circular aperture stop to determine the accessible emission creates very complex pulse patterns. Due to the breakpoints in terms of pulse duration with step functions in the value of *C*5, it might not be apparent that the usage of a square aperture is acceptable as a simplified worst case analysis.		N/A
	d) Applicability of simplified default analysis For pulse durations longer than *T*i, the value of *C*5 is smaller (more restrictive) for angular subtense values α larger than 5 mrad compared to $\alpha \leq 5$ mrad. The assumption of $\alpha = 1{,}5$ mrad is the basis of the simplified (default) evaluation. It is therefore not obvious if the simplified (default) analysis still applies in terms of being a restrictive simplifying analysis even for the case that the angular subtense of the apparent source is actually larger than 5 mrad, where $C5 < 1$.		N/A

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	e) Determination of the most restrictive position For the extended analysis, it is necessary to vary the distance relative to the reference point to determine the most restrictive position. For each position in the beam, the accommodation is varied and the most restrictive image is determined. For determining the most restrictive image (where the ratio AE/AEL is maximum) at a given position, requirement 3) of 4.3 f) is not applied. Otherwise a blurred (larger) image of the apparent source, resulting from variation of the accommodation, could appear more restrictive, which is contrary to general biophysical principles. Once the most restrictive image (and associated α) is identified for each position in the beam, all three requirements of 4.3 f) are applied to determine the most restrictive position (identifying the position with the maximum ratio of AE/AEL) and the class of the product.		P
	f) Application of the total-on-time-pulse method; For regular pulse trains, as well as for varying pulse durations and/or varying period of pulses (but excluding strongly varying peak powers; see below), the total-on-time pulse (TOTP) method (see also IEC 60825-1 Edition 2.0 subclause 8.3 f) 3b)) may be used as an alternative to requirement 3) of 4.3 f), i.e. as an alternative to the application of *C*5 to the single pulse AEL, provided that αmax is determined for the TOTP (or using the worst case value of 100 mrad). This is more restrictive than the rules of 4.3 f) because it is equivalent to an unlimited *C*5 (*C*5 not limited to 0,2 or 0,4), and because the value of αmax is typically larger for the TOTP as compared to the value applicable to the single pulse. For the total-on-time-pulse (TOTP) method the following applies, as reproduced from Edition 2 of IEC 60825-1: The AEL is determined by the value of the TOTP, which is the sum of all pulse durations within the emission duration or *T*2, whichever is smaller. Pulses with durations shorter than *T*i are assigned pulse durations of *T*i. If two or more pulses occur within a duration of *T*i these pulse groups are assigned pulse durations of *T*i. For comparison with the AEL for the corresponding duration, all individual pulse energies are added. Note that the TOTP method in Edition 2 of IEC 60825-1 (incl. Corrigendum 1) was specified “For varying pulse widths or varying pulse intervals“ and did not refer to varying peak powers. For the case of strongly varying peak powers, the TOTP method is not applicable, as		N/A

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
	adding pulses to the pulse train with small peak powers and low contributing energy-per-pulse values might increase the AEL (by increasing the total-on-time) more than this increases the total energy, and thus would make the emission less critical as compared to an emission based on the pulses with the large peak power only.		
	g) Varying peak power but constant pulse duration For varying peak power but constant pulse durations, requirement 3) of 4.3 f) can be applied by counting the pulses for the determination of *N* based on the relative peak power, i.e. *N* is increased by 1,0 for each pulse with the maximum peak power, and by a value of less than 1,0 for pulses with lower peak power, such as for a pulse with 70 % peak power compared to the maximum peak power in the pulse train, *N* is increased by 0,7. For this, based on the strong nonlinearity of thermally induced injury with temperature, it is justified not to count pulses with peak powers that are more than a factor of 10 below the pulse with the maximum peak power (i.e. less than 10 % of the maximum peak power). Note that the resulting AELs.p.train is applied to the pulse with the largest AE, i.e. the largest energy per pulse, and that the interpretation in this paragraph applies only for the case of pulse trains with constant pulse durations.		N/A
ZB.3	**Subclause 4.4 conventional lamp replacement (**IEC 60825-1**:**2014/ISH2:2017**)**	Not such laser product.	N/A
	This subclause ZB.3 contains the text of IEC 60825-1:2014/ISH2:2017 with some minor modifications for clarity. Subclause 4.4 introduces a criterion based on radiance, which is a quantity not normally determined for laser products. This interpretation clarifies the determination of radiance and the radiance limit. In this subclause ZB.3 of the Annex ZB, Subclause 4.4 is clarified.	Not such laser product.	N/A

IEC60825_1G - ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict
ZB.4	**Subclause 6.3.2 – safety interlocks** **Introduction** In this subclause, additional interpretations are provided, that were not contained in the IEC Interpretation Sheets, due to limitations on the length of the Interpretation Sheets. The requirements for safety interlocks that are provided with a deliberate override mechanism are specified in 6.3.2. The exception, described in 6.3.2 for automatically returning an overridden interlock to normal operation when an open door is closed, needs clarification. The portion of text that may cause confusion is: “If a deliberate override mechanism is provided, the manufacturer shall also provide adequate instructions about safe methods of working. It shall not be possible to leave the override in operation when the access panel is returned to its normal position. An exception to this requirement is allowed if selection of a service “override” mode automatically isolates the laser beam and prevents automatic resumption of operation of the machine. This exception also requires a lockable mode selector and requires a manual override to use the beam.”		—
ZZ	**Annex ZZ** (informative)		—

IEC60825_1G - ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict

Relationship between this European standard and the safety objectives of Directive 2014/35/EU [2014 OJ L96] aimed to be covered —

This European Standard has been prepared under a Commission's standardization request relating to harmonized standards in the field of the Low Voltage Directive, M/511, to provide one voluntary means of conforming to safety objectives of Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonization of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits [2014 OJ L96].

Once this standard is cited in the Official Journal of the European Union under that Directive, compliance with the normative clauses of this standard given in Table ZZ.1 confers, within the limits of the scope of this standard, a presumption of conformity with the corresponding safety objectives of that Directive, and associated EFTA regulations.

Table ZZ.1 — Correspondence between this European standard and Annex I of Directive 2014/35/EU [2014 OJ L96]

Safety objectives of Directive 2014/35/EU	**Clause(s) / subclause(s) of this EN**	**Remarks / Notes**
1(a) (b)	Clause 7 (labelling) and Clause 8 (information for the user)	
1 (c)	Clause 5 (testing requirements) include intended use and maintenance	
2. (b) Protection against hazards arising from the electrical equipment with measures of a technical nature that ensure that radiation which would cause a danger is not produced.	Clauses 4–9	The scope of EN 60825-1 is limited to hazards from laser radiation to the eye or skin
3 (c)	Clause 5 (testing requirements) include single fault conditions	

WARNING 1 — Presumption of conformity stays valid only as long as a reference to this European standard is maintained in the list published in the Official Journal of the European Union. Users of this standard should consult frequently the latest list published in the Official Journal of the European Union.


WARNING 2 — Other Union legislation may be applicable to the product(s) falling within the scope of this standard.

ATTACHMENT to TRF IEC60825_1G			
Clause	Requirement + Test	Result - Remark	Verdict
ATTACHMENT TO TEST REPORT **IEC 60825-1:2014** **CANADA NATIONAL DIFFERENCES** Safety of laser products - Part 1: Equipment classification and requirements			
Differences according to..... CAN/CSA-E60825-1:15			
TRF template used: ..... IECEE OD-2020-F3:2022, Ed. 1.2			
Attachment Form No. ..... CA_ND_ IEC60825_1G **Attachment Originator .....** CSA Group **Master Attachment** 2023-08-21			
Copyright © 2023 IEC System for Conformity Testing and Certification of Electrical Equipment (IECEE), Geneva, Switzerland. All rights reserved.			
	National Differences		—
	Canadian deviations: Replace all references to “IEC 60825-1” with: “CAN/CSA E60825-1”	Considered	P
1	Scope and object In the eighth paragraph, replace “IEC 62115” with: “CSA C22.2 No. 149” Add the following paragraph at the end of the clause: This Standard covers the above-noted products that are intended to be installed or used in accordance with CSA C22.1, Canadian Electrical Code, Part I.		N/A
2	Normative references Where reference is made to CSA Group publications, such reference shall be considered to refer to the latest edition and all amendments published to that edition. This Standard refers to the following publications, and the years shown indicate the latest editions available at the time of printing:	Considered	P
	CSA Group C22.1-15 Canadian Electrical Code, Part I CAN/CSA-C22.2 No. 0-10 (R2015) General requirements — Canadian Electrical Code, Part II C22.2 No. 0.8-12 Safety functions incorporating electronic technology C22.2 No. 149-72 (R2013) Electrically operated toys C22.2 No. 173-M1983 (R2014) Transformers for toy and hobby use		—


ATTACHMENT to TRF IEC60825_1G			
Clause	Requirement + Test	Result - Remark	Verdict
	The following National Standards of Canada, published by CSA Group, are adoptions of IEC Standards. The requirements of these CSA Group Standards **shall take precedence** over the International Standards on which they are based; any reference within CAN/CSA-E60825-1 to the International Standards shall be **replaced** by a reference to the equivalent Canadian Standard. Any reference to International Standards that are adopted as National Standards of Canada subsequent to the publication of CAN/CSA-E60825-1 shall be **replaced** by the relevant National Standard of Canada.	Considered	P
	CAN/CSA-C22.2 No. 60065:03 (R2013) Audio, video and similar electronic apparatus — Safety requirements CAN/CSA-C22.2 No. 60079-0:11 Explosive atmospheres — Part 0: Equipment — General requirements CAN/CSA-C22.2 No. 60601-2 series of Standards Medical electrical equipment — Part 2: Particular requirements CAN/CSA-C22.2 No. 60601-2-22:08 (R2014) Medical electrical equipment — Part 2-22: Particular requirements for basic safety and essential performance of surgical, cosmetic, therapeutic and diagnostic laser equipment CAN/CSA-C22.2 No. 60950-1:07 (R2012) Information technology equipment — Safety — Part 1: General requirements CAN/CSA-C22.2 No. 61010-1:12 Safety requirements for electrical equipment for measurement, control, and laboratory use — Part 1: General requirements CAN/CSA-C22.2 No. 62368-1:14 Audio/video, information and communication technology equipment — Part 1: Safety requirements CAN/CSA-C22.2 No. 62471:12 Photobiological safety of lamps and lamp systems CAN/CSA-E60335-2 series of Standards Safety of Household and Similar Electrical Appliances — Part 2		—
4.1A	General requirements Products covered by the scope of this Standard are **also subject to** the requirements of CAN/CSA-C22.2 No. 0.	Considered	P
5.1	Tests In the second and third paragraphs, **replace** “IEC 61508” with: “CSA C22.2 No. 0.8”		N/A
5.3	Determination of the class of the laser product In the second paragraph of Item b), **replace** the last sentence with the following: The laser product can be assigned to Class 1C only if it also complies with a set of safety requirements for Class 1C laser products that can be found in an applicable Canadian CSA C22.2 vertical Standard.		N/A

ATTACHMENT to TRF IEC60825_1G			
Clause	Requirement + Test	Result - Remark	Verdict
6.3.1	In the fourth paragraph, **replace** "IEC product safety standard" with: "Canadian product safety standard"	Considered	P
6.12	Safeguard for Class 1C products In the second paragraph, **replace** "IEC 61508" with: "CSA C22.2 No. 0.8"		N/A
7.1	General **Add** the following paragraph: In Canada, all warning and caution texts shall be listed in English and French.		N/A
9.4	Electric toys **Replace** "IEC 62115" with: "CSA C22.2 No. 149 or CSA C22.2 No. 173"		N/A
9.5	Consumer electronic products **Add** the following at the end of the clause: or to CAN/CSA-C22.2 No. 62368-1.		N/A
C.2.6	Class 3R **Replace** the note with the following: NOTE Compared to ocular MPE values as well as AEL values for Class 1, 1M, 2, 2M and 3R specified in the second edition of IEC 60825-1, the respective values in the third edition of IEC 60825-1 were decreased for some single-pulsed point sources, but increased for most repetitively pulsed sources, and also increased for most pulsed extended sources; reduction factors (safety margins) in these values were changed correspondingly. Consequently, some pulsed products that were classified as Class 3R under IEC Edition 2 are Class 2 under IEC Edition 3, and some pulsed products that were classified as Class 3B under IEC Edition 2 are Class 3R under IEC Edition 3. For the latter, there is less practical experience available regarding the risk for injury as it exists for CW sources with collimated beams with powers up to 5 mW being used for many years as alignment lasers.		N/A
C.2.9	Note on nomenclature **Replace** the last sentence of the second paragraph with the following: The "B" for Class 3B has historical origins, as in a previous version of this Standard (CAN/CSA-E60825-1:03), a Class 3A existed, which had a similar meaning to what is now Class 1M and Class 2M.		N/A


-End of attachment-

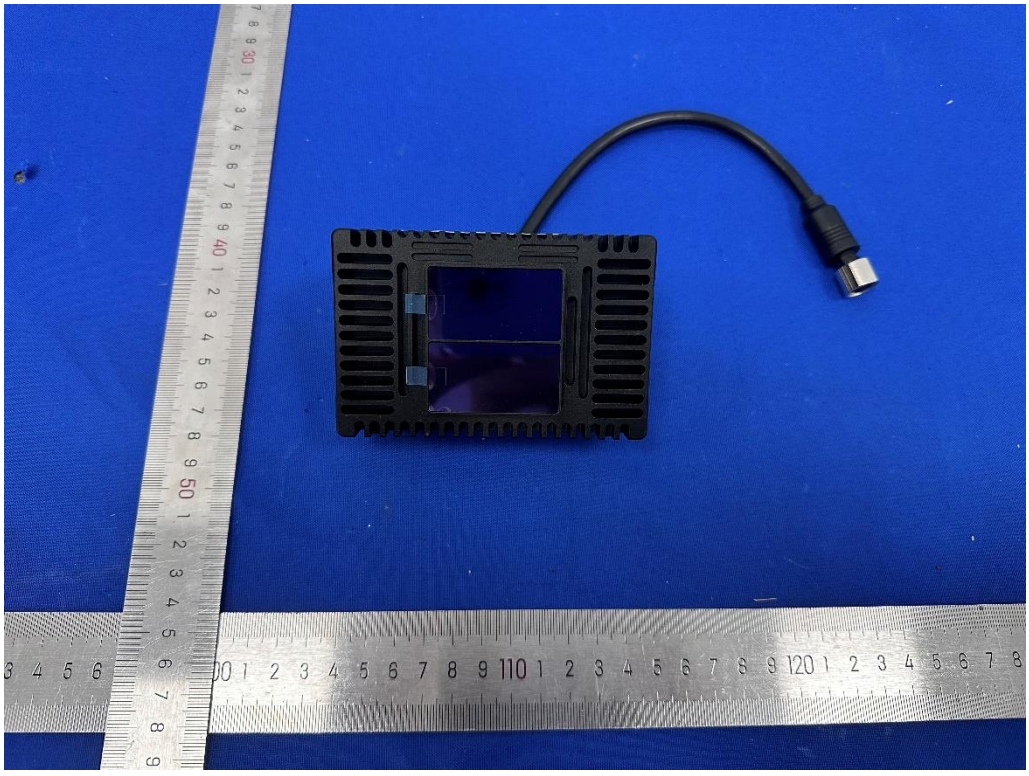


Picture 1 – Overview

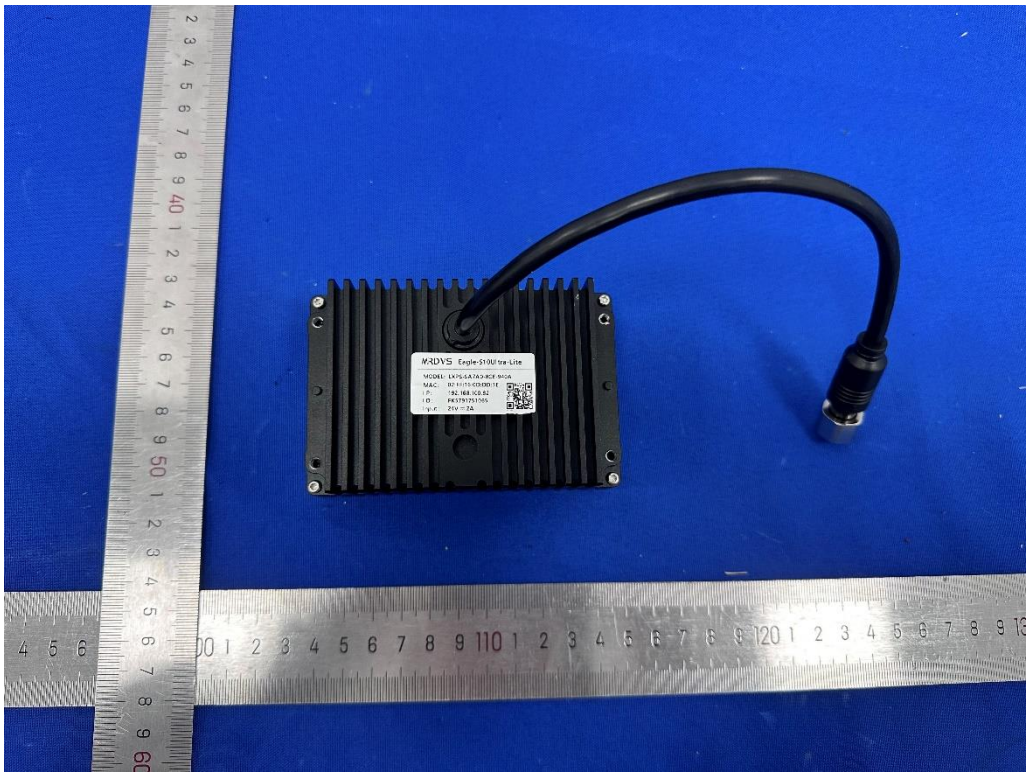


Picture 2 – Overview

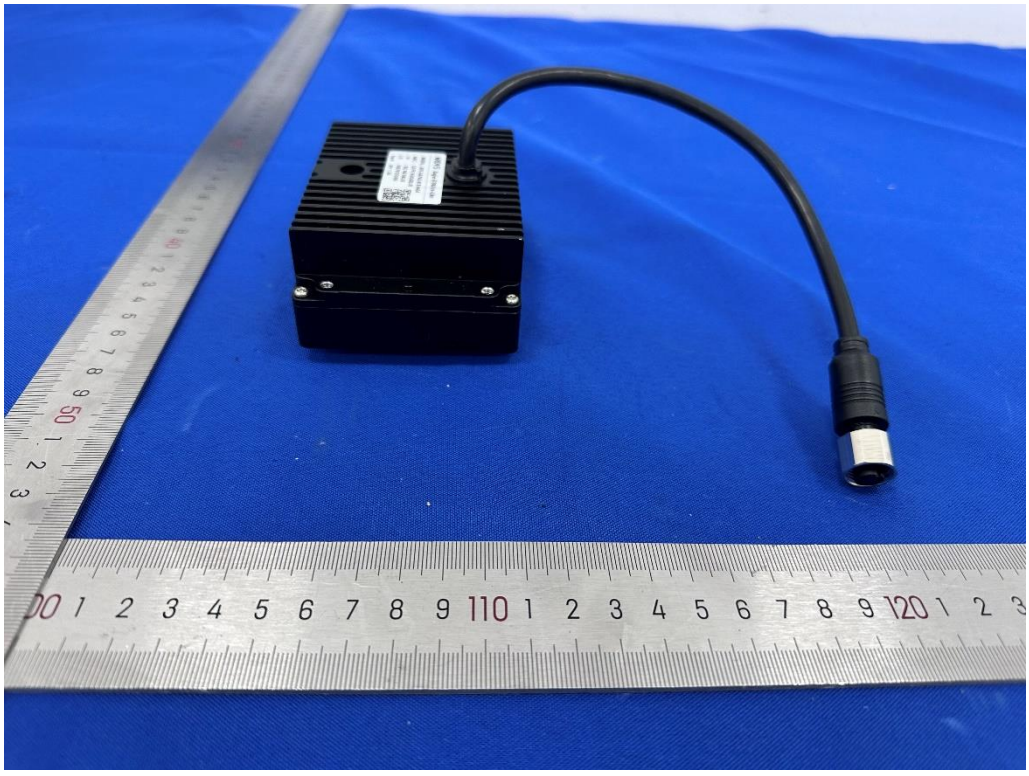


Picture 3 – Overview

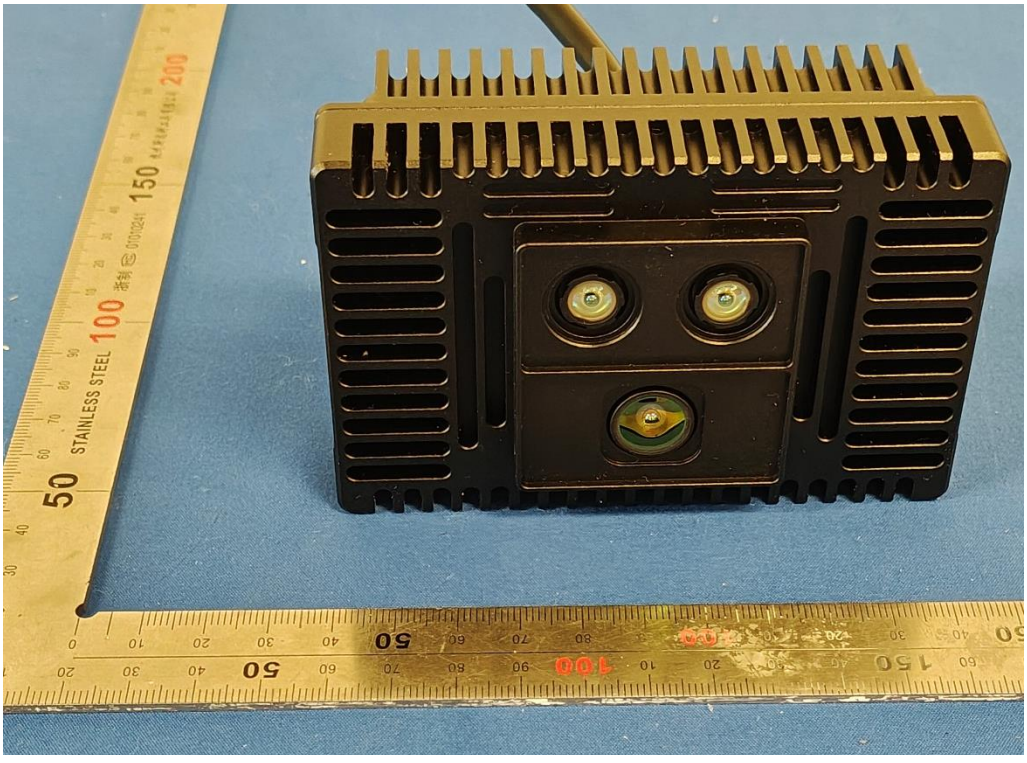


Picture 4 – Overview

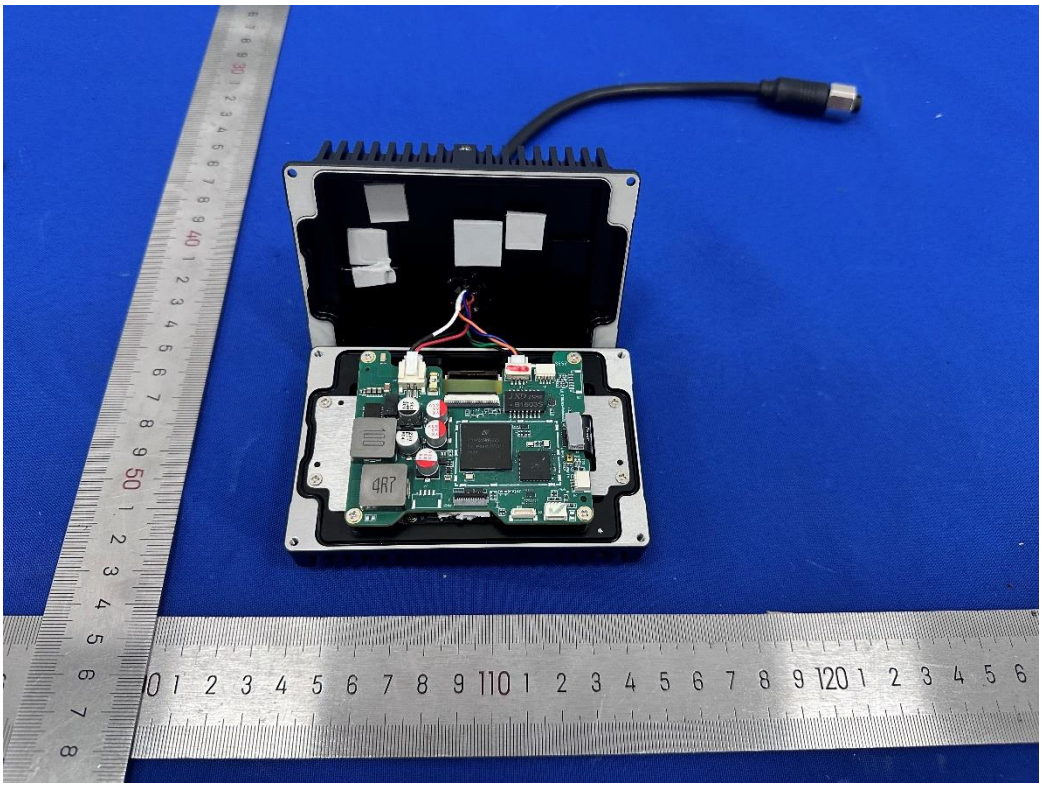


Picture 5 – Internal view

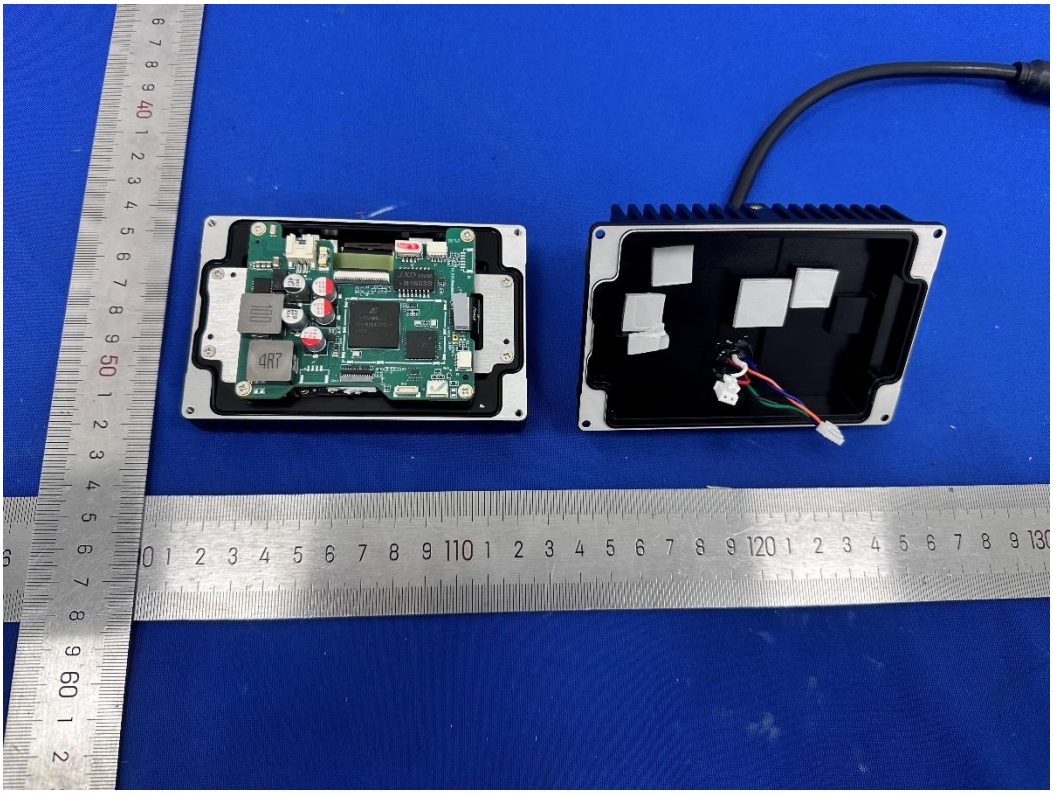


Picture 6 – Internal view

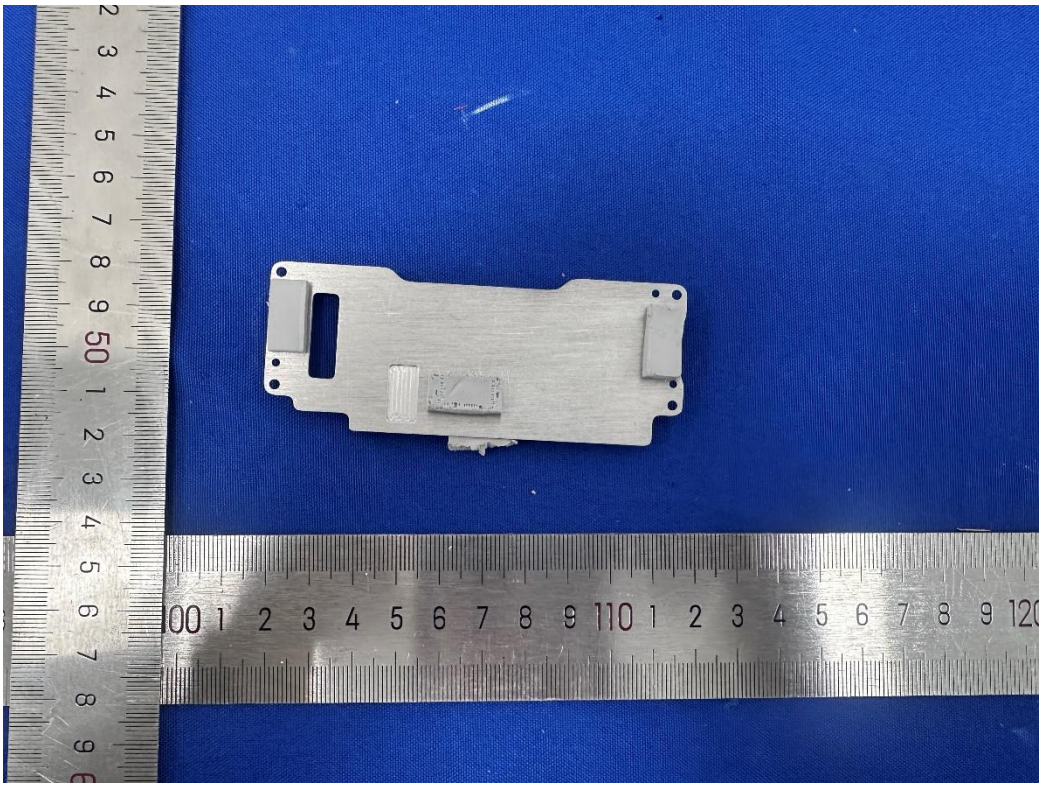


Picture 7 – Holding Back Iron Plate view

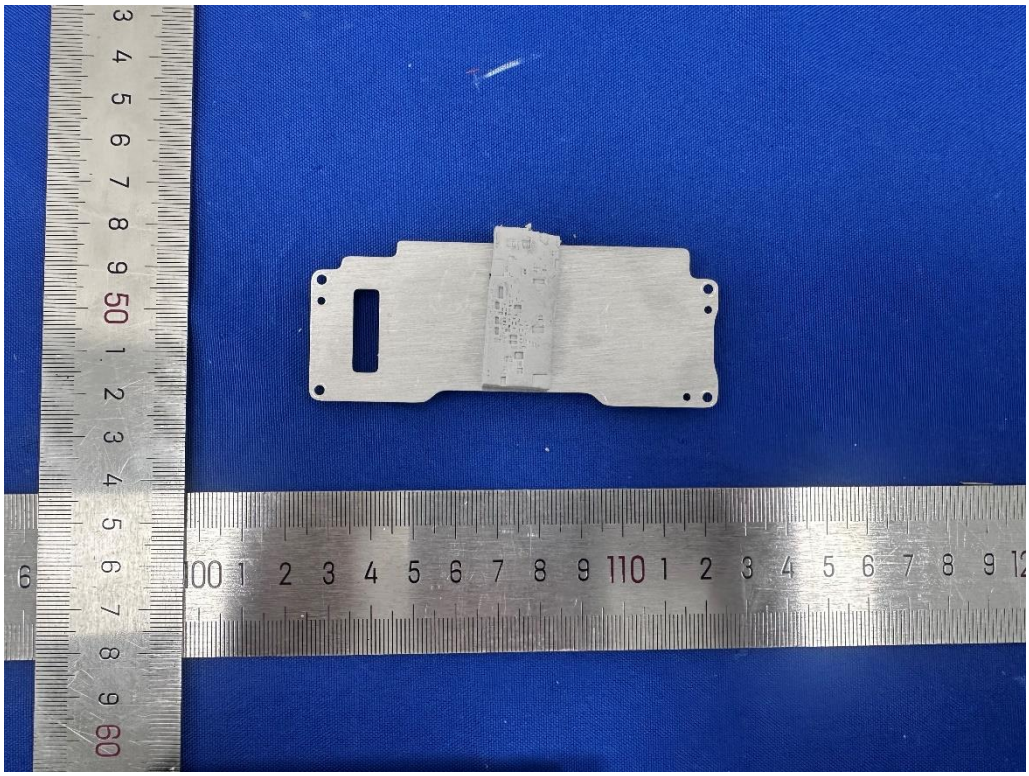


Picture 8 – Holding Back Iron Plate view

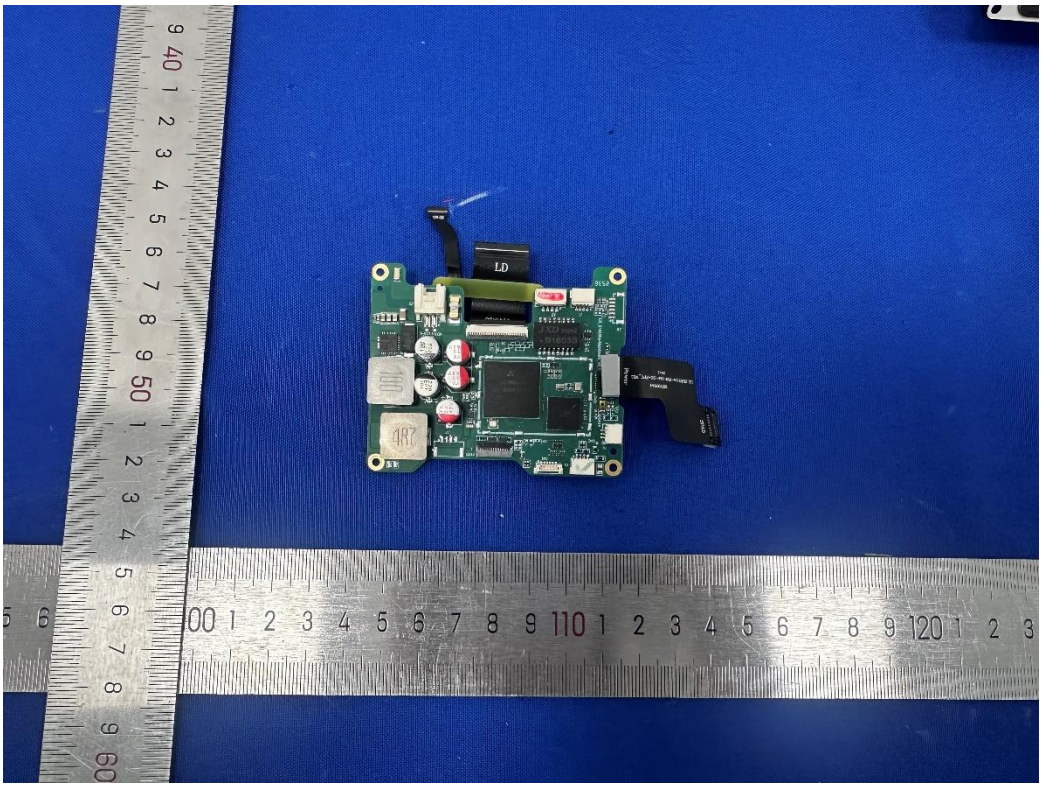


Picture 9 – PCB view

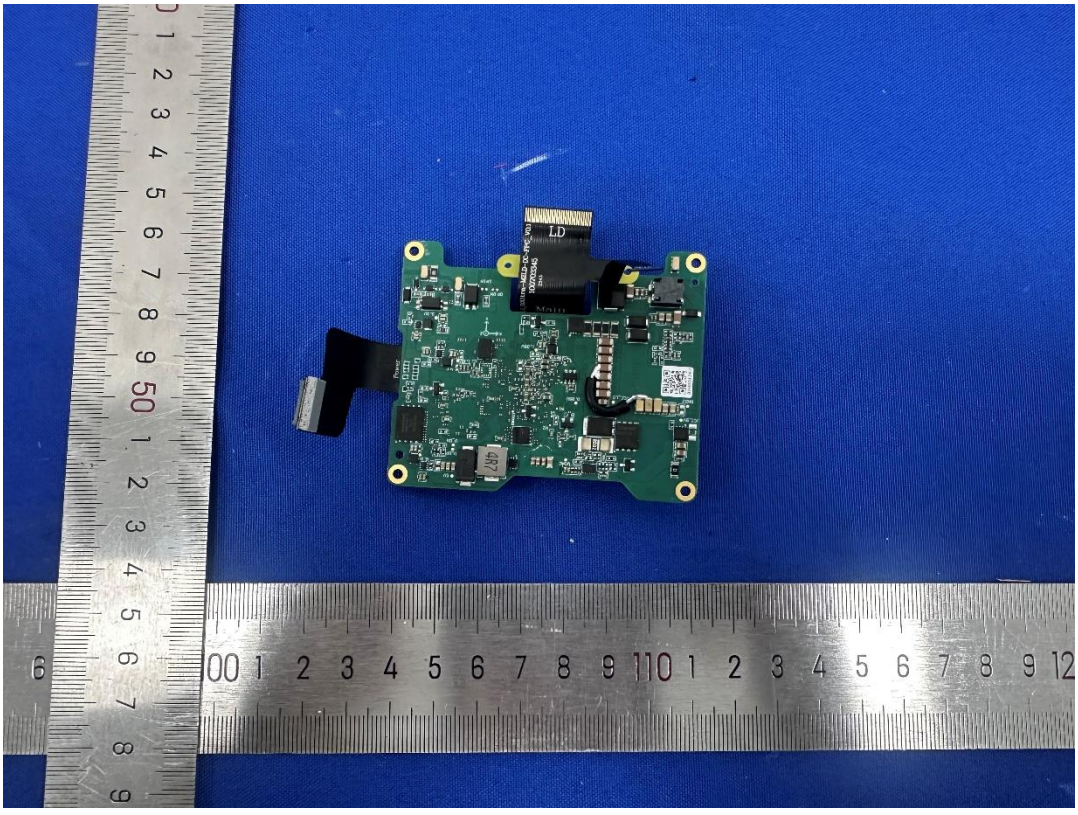


Picture 10 – PCB view

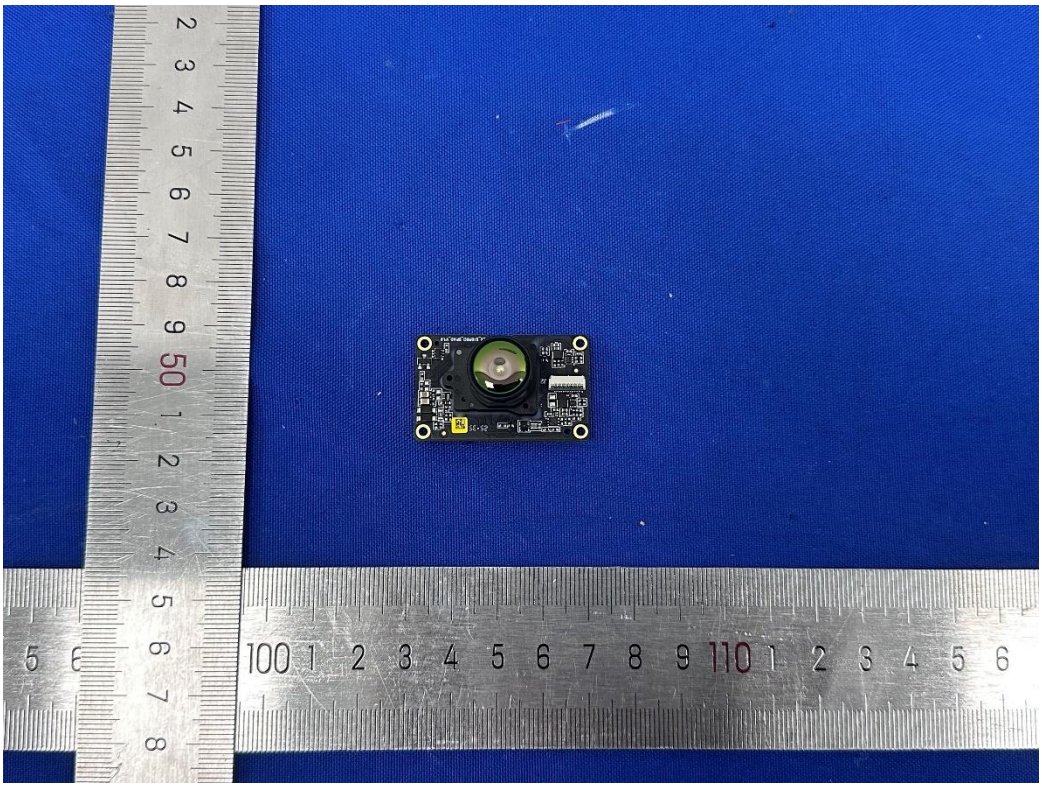


Picture 11 – PCB view

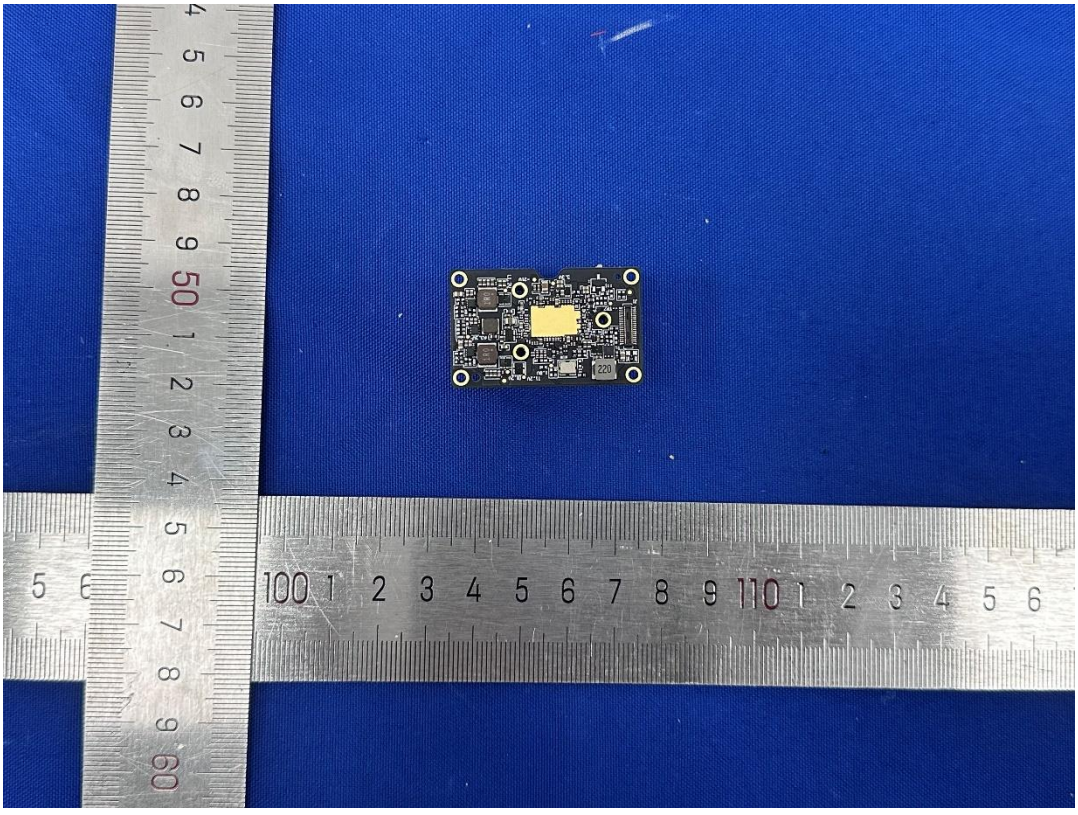


Picture 12 – PCB view

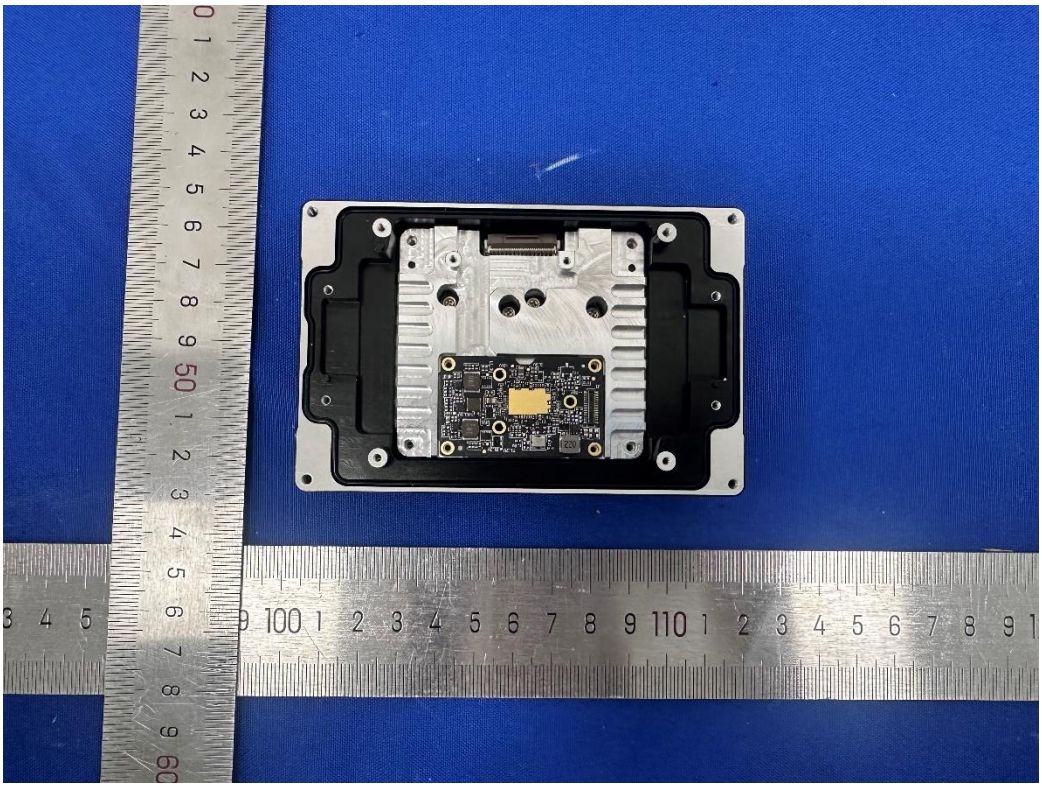


Picture 13 – Internal view

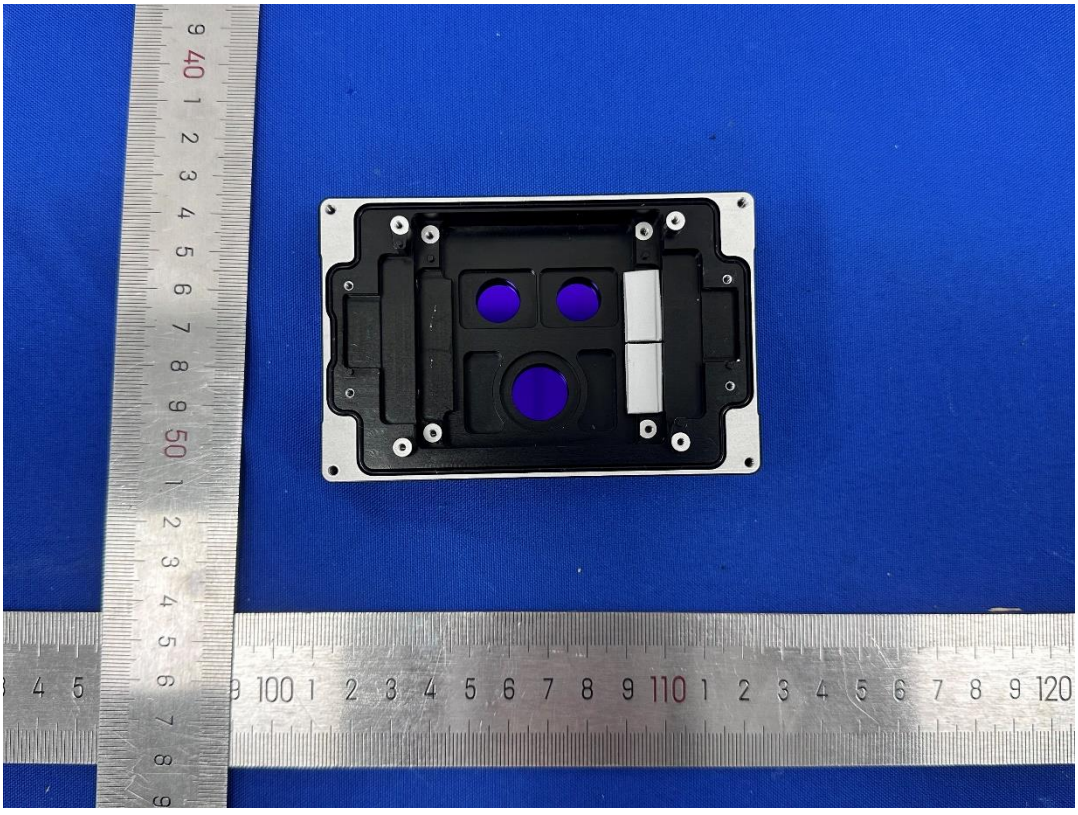


Picture 14 – Internal view

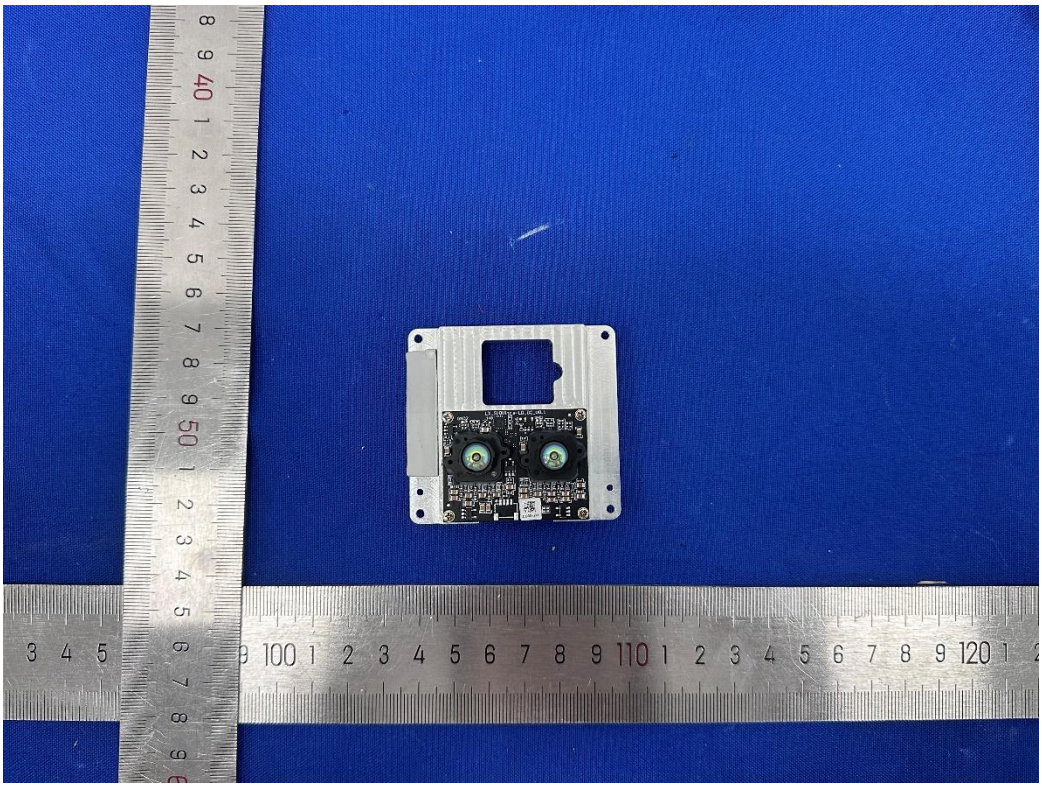

Picture 15 – Vcsel arrays drive board view

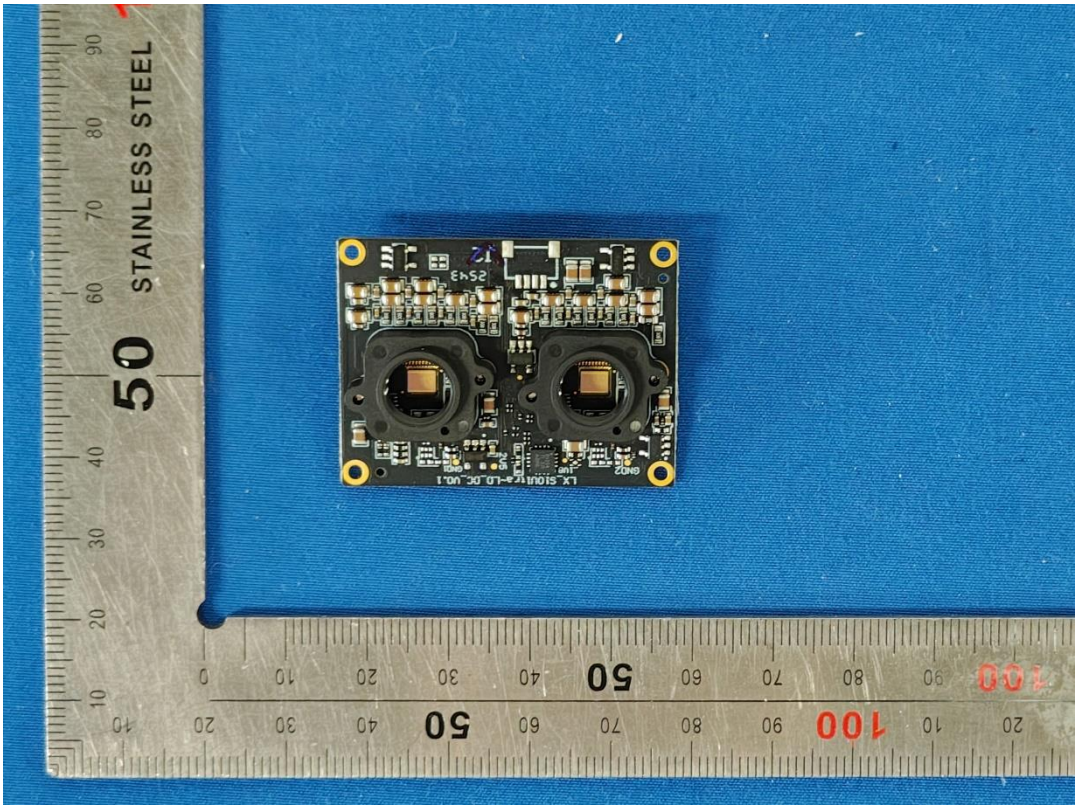

Picture 16 – Vcsel arrays drive board view

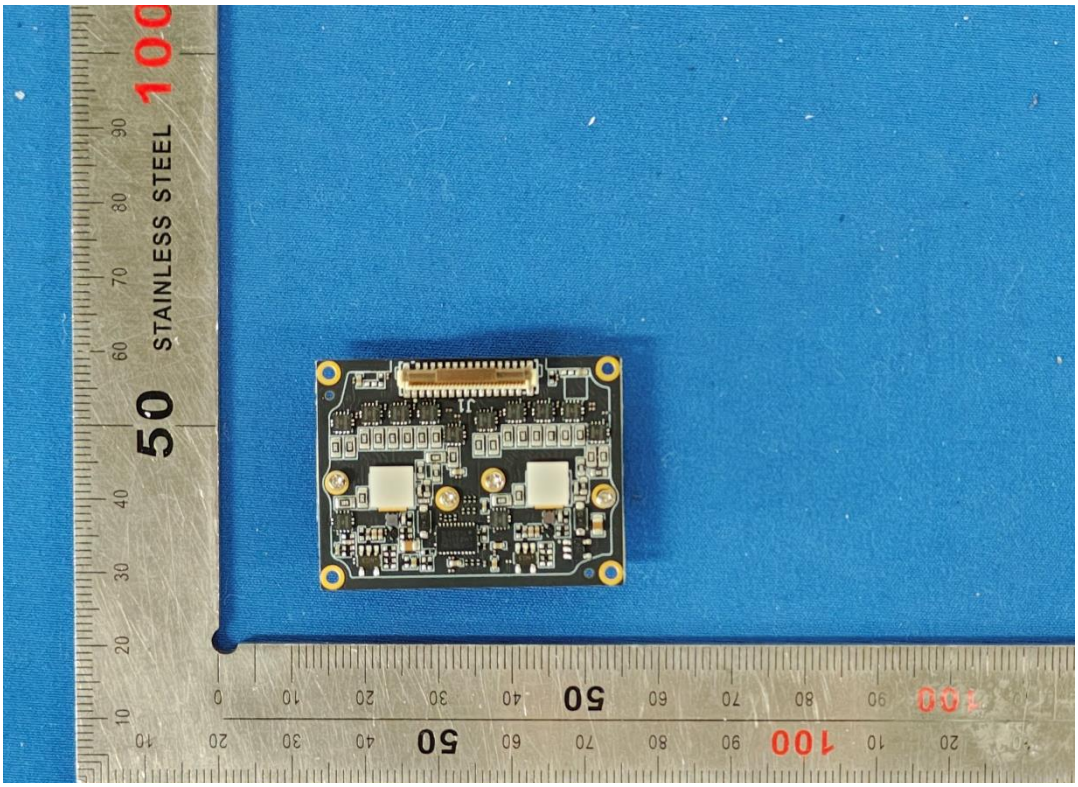

Picture 17 – Vcsel arrays drive board view