Prüfbericht-Nr.: *Test Report No.:*	**CN26K0WK 001**	**Auftrags-Nr.:** *Order No.:*	27255919	Seite 1 von 17 *Page 1 of 17*
Kunden-Referenz-Nr.: *Client Reference No.:*	40974830	**Auftragsdatum:** *Order date.:*	2026-09-07	
Auftraggeber: *Client:*	**Zhejiang MRDVS Technology Co., Ltd.** 1st Floor, No. 5 Building, Phase II of High-end Manufacturing Industrial Park, No. 1177 Xin'an Road, High-tech Zone, Wuxing District, Huzhou, 313000 Zhejiang P.R. China			
Prüfgegenstand: *Test item:*	S11 3D Camera			
Bezeichnung / Typ-Nr.: *Identification / Type No.:*	MRDVS-SA822-4CE-940A, MRDVS-SA822-5EE-940A, MRDVS-SA822-5EU-940A, MRDVS-SA822-5EE-940B, MRDVS-SA822-5EE-940C, MRDVS-SA820-5EE-940A, MRDVS-SA820-5EE-940B, MRDVS-SA820-5EU-940A, MRDVS-SA820-5EU-940B, MRDVS-SA820-5ED-940A, MRDVS-SA822-5EM-940A			
Auftrags-Inhalt: *Order content:*	TÜV Rheinland - EMC service			
Prüfgrundlage: *Test specification:*	EN IEC 61000-6-2:2019 EN IEC 61000-6-4:2019			
Wareneingangsdatum: *Date of receipt:*	2026-09-15			
Prüfmuster-Nr.: *Test sample No.:*	A004387592-001~003			
Prüfzeitraum: *Testing period:*	Refer to test report			
Ort der Prüfung: *Place of testing:*	Refer to section 2.1			
Prüflaboratorium: *Testing laboratory:*	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: *Test result*:*	Pass			



geprüft von: *tested by: Chris Mo*	Chris Mo	**genehmigt von:** *authorized by: Murphy Chen*	Murphy Chen
Datum: *Date:* 2026-10-26		**Ausstellungsdatum:** *Issue date:* 2026-10-26	
Stellung / Position**:**	Project Engineer	**Stellung** / Position:	Authorizer

Sonstiges */ Other:*

Zustand des Prüfgegenstandes bei Anlieferung: *Condition of the test item at delivery:* — Prüfmuster vollständig und unbeschädigt *Test item complete and undamaged*

* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht
** Legend:*	*P(ass) = passed a.m. test specification(s)*	*F(ail) = failed a.m. test specification(s)*	*N/A = not applicable*	*N/T = not tested*

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.
This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. *The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.* *Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.*
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature *As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature*
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. *Test clauses with remark of * are subcontracted to qualified subcontractors and descripted under the respective test clause in the report.* *Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.*
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnisen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2023, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezueglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. *The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the “Zero Guard Band Rule” and “Simple Acceptance” in accordance with ILAC G8:2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.*

TEST SUMMARY

5.1.1 RADIATED EMISSION
RESULT: Pass

6.2.1 RADIO-FREQUENCY ELECTROMAGNETIC FIELD AMPLITUDE MODULATED (RS)
RESULT: Pass

6.3.1 ELECTROSTATIC DISCHARGES (ESD)
RESULT: Pass

Contents

1. GENERAL REMARKS 5
1.1 COMPLEMENTARY MATERIALS 5
2. TEST SITES 5
2.1 TEST FACILITIES 5
2.2 LIST OF TEST AND MEASUREMENT INSTRUMENTS 6
3. GENERAL PRODUCT INFORMATION 7
3.1 PRODUCT FUNCTION AND INTENDED USE 7
3.2 RATINGS AND SYSTEM DETAILS 7
3.3 INDEPENDENT OPERATION MODES 8
3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS 8
3.5 SUBMITTED DOCUMENTS 8
4. TEST SET-UP AND OPERATION MODES 9
4.1 PRINCIPLE OF CONFIGURATION SELECTION 9
4.2 TEST OPERATION AND TEST SOFTWARE 9
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT 9
4.4 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE 9
5. TEST RESULTS EMISSION 10
5.1 EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHZ 10
5.1.1 Radiated Emission 10
6. TEST RESULTS IMMUNITY 11
6.1 CLASSIFICATION OF APPARATUS 11
6.2 CONTINUOUS DISTURBANCES 12
6.2.1 Radio-Frequency Electromagnetic Field Amplitude Modulated (RS) 12
6.3 TRANSIENT DISTURBANCES 13
6.3.1 Electrostatic Discharges (ESD) 13
7. PHOTOGRAPHS OF THE TEST SET-UP 14
8. LIST OF TABLES 17
9. LIST OF PHOTOGRAPHS 17

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

Appendix 2: Measurement uncertainties

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.
2-3F, 101 & 102, No.2 Nuclear Power Industrial Park Fuming Community, Fucheng Street, Longhua District Shenzhen, Guangdong Province P.R. China

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Radiated Electromagnetic Disturbances (30-1000MHz) (TÜV)				
3m SAC	ETS-Lindgren	SAC3	CT001632-Q1362	2027-09-11
EMI Test Receiver	R&S	ESR7	102111	2027-07-20
Trilog-Broadband Antenna	Schwarzbeck	VULB9168	0945	2027-07-20
Horn Antenna	R&S	HF907	102706	2027-07-31
Preamplifier (9KHz-18GHz)	R&S	SCU-18F	180076	2027-07-20
EMC32 Test Software	R&S	EMC32(Ver.10.60.20)	N/A	N/A
Radio Frequency Electromagnetic Field (TÜV)				
3m FAC	ETS-Lindgren	FAC3	CT001632-Q1360	2027-09-12
Signal Generator	R&S	SMB100A	115183	2027-07-20
Power Amplifier	R&S	BBA150-BC250	103102	2027-07-20
Power Amplifier	R&S	BBA150-D110E100	103117	2027-07-20
Power Sensor	R&S	NRP6AN	101161	2027-07-20
Power Sensor	R&S	NRP6AN	101162	2027-07-20
Stacked Double Log.-Per. Antenna	Schwarzbeck	STLP 9128E	0153	2027-02-07
Stacked Log. -Per. Antenna	Schwarzbeck	STLP 9149	00520	2027-02-07
EMC32 Test Software	R&S	EMC32(Ver.10.50.00)	N/A	N/A
ESD (TÜV)				
ESD Tester	EMTEST	NX30.1	11896	2027-03-01

3. General Product Information

3.1 Product Function and Intended Use

The **EUT** (**E**quipment **U**nder **T**est) is S11 3D Camera used for industrial environment equipment. The length of DC input cable and signal cable are less than 3 meter.
All models are identical to each other except for different model name, RGB module or enclosure. Refer to below table for details.

Model list:

Model No.	Remark
MRDVS-SA822-5EM-940A	with an RGB module and without an enclosure
MRDVS-SA822-4CE-940A MRDVS-SA822-5EE-940A MRDVS-SA822-5EU-940A MRDVS-SA822-5EE-940B MRDVS-SA822-5EE-940C	with an RGB module and an enclosure
MRDVS-SA820-5EE-940A MRDVS-SA820-5EE-940B MRDVS-SA820-5EU-940A MRDVS-SA820-5EU-940B MRDVS-SA820-5ED-940A	without an RGB module and with an enclosure

With enclosure	Without enclosure
	
Remark: Models without an enclosure are intended for installation and use inside the host equipment.	

For details please refer to the Circuit Diagram & Instruction Manual.

3.2 Ratings and System Details

System input:	DC 24V 2A
Frequency:	--
Earthing:	Connected *
Highest internal frequency:	950MHz

Remark: *_EUTs may be connected to earth potential via the AC/DC adapter.

3.3 Independent Operation Modes

The basic operation modes are:

A. On
B. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Specification

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure their highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Immunity: The equipment under test (EUT) was configured to have their highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5 & 6. Tests were applied to model MRDVS-SA822-5EE-940A.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested as an independent unit with the following accessories/auxiliary equipment:

Product Type	Manufacturer	Model No.	Remark
AC/DC adapter	N/A	YU2403	N/A

4.4 Countermeasures to achieve EMC Compliance

The test samples, which have been tested, contained the noise suppression parts as described in the Technical Construction File. No additional measures were employed to achieve compliance.

5. Test Results EMISSION

5.1 Emission in the Frequency Range above 30 MHz

5.1.1 Radiated Emission

RESULT: **Pass**

Date of testing	:	Refer to attached Appendix 1
Test standard	:	EN IEC 61000-6-4:2019
Frequency range	:	30 - 6000MHz
Limits	:	Table 3 of EN IEC 61000-6-4:2019
Kind of test site	:	3m Semi-Anechoic Chamber
Measuring distance	:	3m
Tested Port	:	Enclosure

Test setup

Input Voltage	:	DC 24V
Operation Condition	:	Clause 4 of EN IEC 61000-6-4:2019
Operation mode	:	A
Earthing	:	Connected

Detailed test results refer to attached Appendix 1. (The minimum margin is 1.69dB)

6. Test Results IMMUNITY

6.1 Classification of apparatus

According to EN IEC 61000-6-2:2019, the EUTs shall be tested in accordance with clause 4, 5 & 9, table 1 of EN IEC 61000-6-2:2019 and comply with following performance criterion:

Continuous Disturbance

Radio-Frequency Electromagnetic Field Amplitude Modulated (RS)	**Criterion A**
Radio-Frequency Continuous Conducted (CS) **	**Criterion A**
Power-Frequency Magnetic Fields*	**Criterion A**

Transient Disturbance

Fast Transients (EFT) **	**Criterion B**
Surge**	**Criterion B**
Electrostatic Discharges (ESD)	**Criterion B**

Remark:
* Power Frequency Magnetic Fields is not applicable, since the EUTs do not contain any components susceptible to magnetic fields.
** Since the length of cable connecting to DC port, signal port is less than 3m, hence no need EFT, Surge & CS tests on these ports.

6.2 Continuous Disturbances

6.2.1 Radio-Frequency Electromagnetic Field Amplitude Modulated (RS)

RESULT: **Pass**

Date of Testing	:	2026-09-30
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-3:2006+A1+A2
Criterion	:	A
Frequency Range	:	80 - 1000MHz, 1.4 – 6.0GHz
Test Level	:	10V/m: 80 – 1000MHz 3V/m: 1.4 – 6.0GHz (Unmodulated, r.m.s.)
Modulation	:	AM 80%, 1kHz sine-wave
Tested Port	:	Enclosure

Test setup

Input Voltage	:	DC 24V
Operation Mode	:	A
Earthing	:	Connected
Ambient temperature	:	24.2°C
Relative humidity	:	53.2%
Atmospheric pressure	:	101kPa

Test result:

Polarization	Frequency Range	Test Level	Criterion	Description	Conclusion
H/V	80MHz to 1000MHz	10V/m (rms)	A	Operating as intended, no failure detected	Pass
H/V	1.4 – 6.0GHz	3V/m (rms)	A	Operating as intended, no failure detected	Pass

6.3 Transient Disturbances

6.3.1 Electrostatic Discharges (ESD)

RESULT: **Pass**

Date of testing	:	2026-09-30
Test Specification	:	EN IEC 61000-6-2:2019
Basic Standard	:	IEC 61000-4-2:2008
Criterion	:	B
Charge voltage	:	±2.0kV, ±4.0kV, ±8kV (air discharge) ±4.0kV (contact discharge)
Number of discharges	:	>10
Tested Port	:	Enclosure

Test Setup


Input Voltage	:	DC 24V
Operation Mode	:	A
Earthing	:	Connected
Ambient temperature	:	23.6°C
Relative humidity	:	53.8%
Atmospheric pressure	:	101kPa


Test Result

Test Point	Test Mode	Test Level (kV)	Performance Criterion	Description	Result
VCP	C	±2, ±4	B	No failure detected	Pass
HCP	C	±2, ±4	B	No failure detected	Pass
Conducted Enclosure	C	±2, ±4	B	No failure detected	Pass
Non-Conducted Enclosure	A	±2; ±4; ±8	B	No failure detected	Pass
Note: A-Air discharge; C- Contact Discharge; VCP- Vertical Coupling Plane; HCP- Horizontal Coupling Plane					


7. Photographs of the Test Set-Up


Photograph 1: Set-up for Radiated Emission

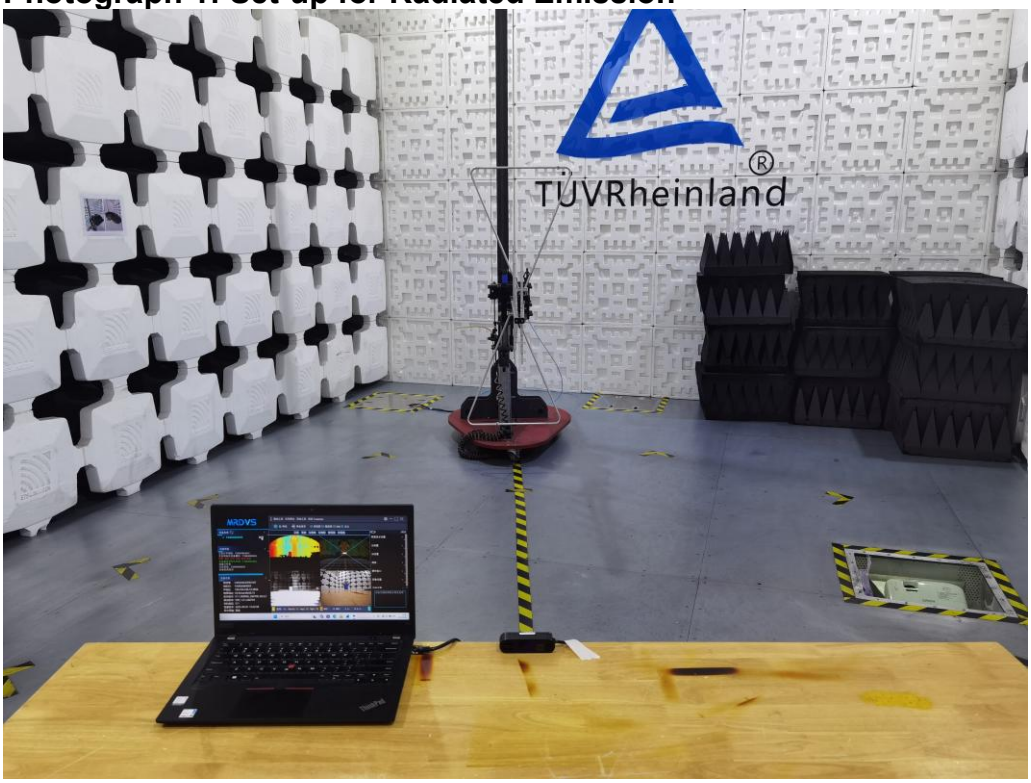

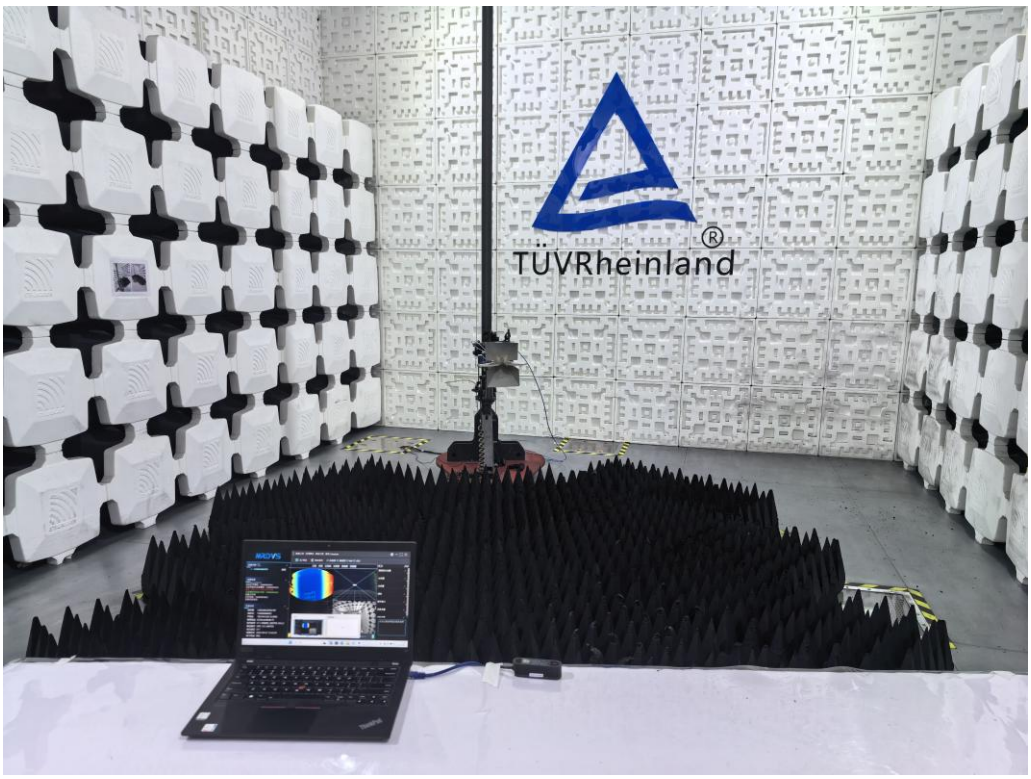

Photograph 2: Set-up for Radio Frequency Electromagnetic Field (RS)

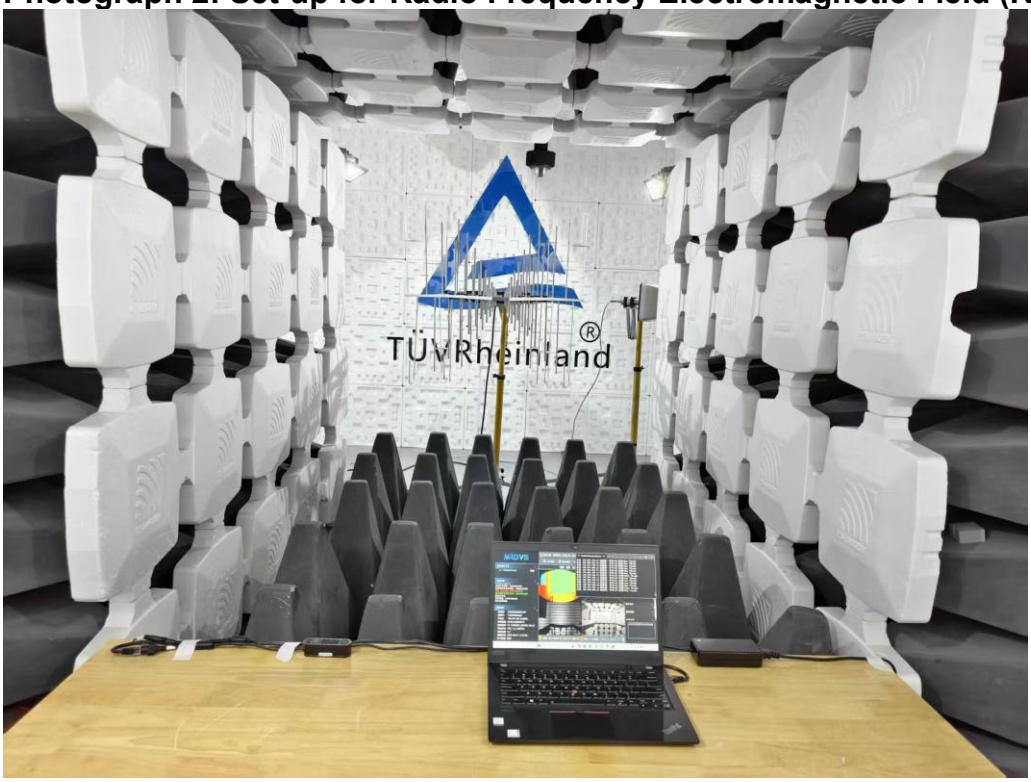

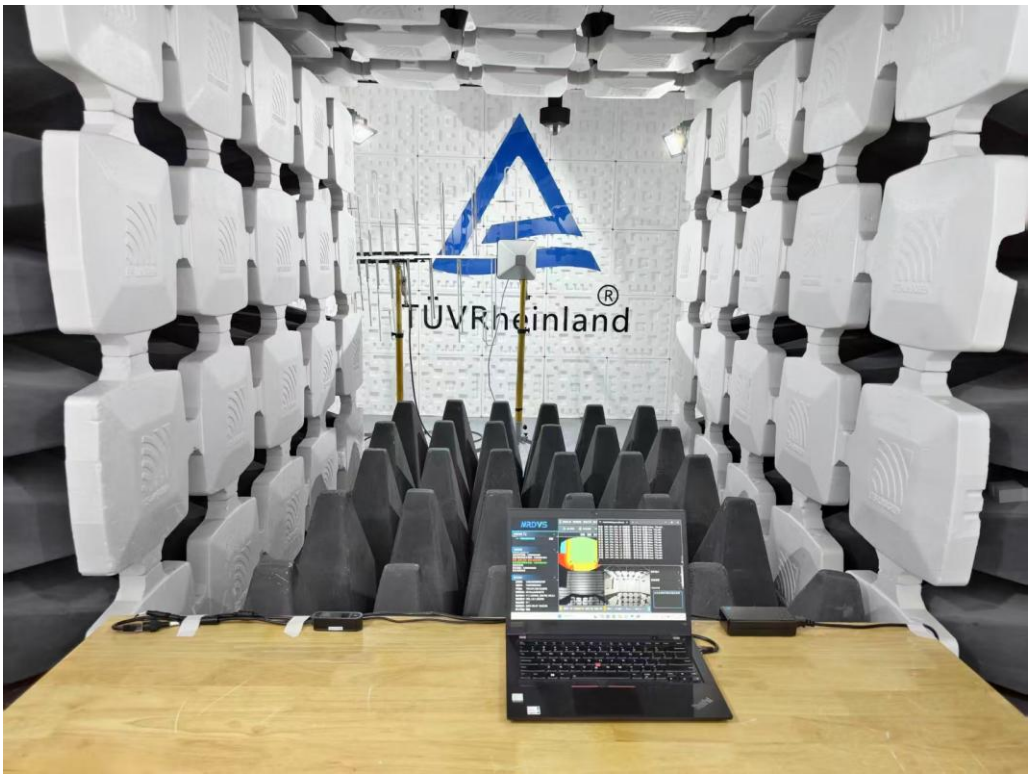

Photograph 3: Set-up for Electrostatic Discharges (ESD)



8. List of Tables

Table 1: List of Test and Measurement Equipment 6

9. List of Photographs


Photograph 1: Set-up for Radiated Emission 14
Photograph 2: Set-up for Radio Frequency Electromagnetic Field (RS) 15
Photograph 3: Set-up for Electrostatic Discharges (ESD) 16

TÜV Rheinland (Shenzhen) Co., Ltd. Chamber : 3m SAC

Test Report

EUT Information

EUT Name:	S11 3D Camera
Model:	MRDVS-SA822-5EE-940A
Test Mode:	On
Test Voltage:	DC 24V
Temp/Hum	Temp:23.3℃; Humi:50.2%
Test standard:	EN IEC 61000-6-4
Tested By:	Aric Wang
Reviewed by:	Charlie Zha

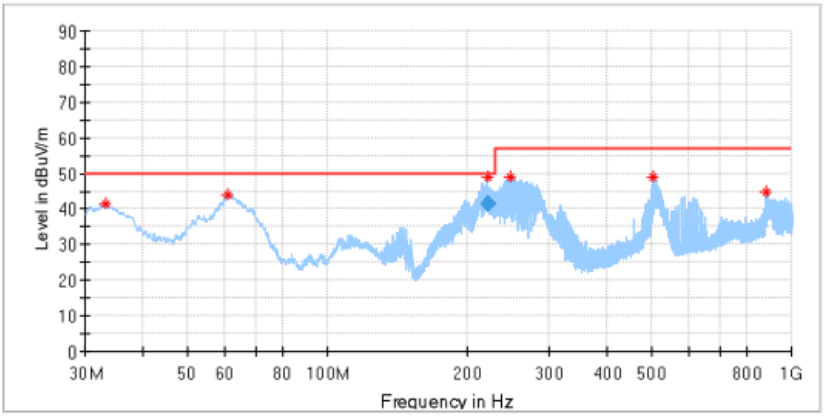

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.334375	41.35	50.00	8.65	100.0	H	183.0	19.3
60.797500	44.11	50.00	5.89	200.0	H	39.0	19.9
221.469575	48.93	50.00	1.07	100.0	H	350.0	17.7
247.037500	48.87	57.00	8.13	100.0	H	350.0	19.5
503.966250	48.88	57.00	8.12	100.0	H	12.0	26.4
878.931875	44.88	57.00	12.12	200.0	H	45.0	32.9

Final_Result

Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
221.469575	41.25	50.00	8.75	1000.0	120.000	100.0	H	350.0	17.7


2026-09-28

TÜV Rheinland (Shenzhen) Co., Ltd. Chamber : 3m SAC

Test Report

EUT Information

EUT Name:	S11 3D Camera
Model:	MRDVS-SA822-5EE-940A
Test Mode:	On
Test Voltage:	DC 24V
Temp/Hum	Temp:23.3℃; Humi:50.2%
Test standard:	EN IEC 61000-6-4
Tested By:	Aric Wang
Reviewed by:	Charlie Zha

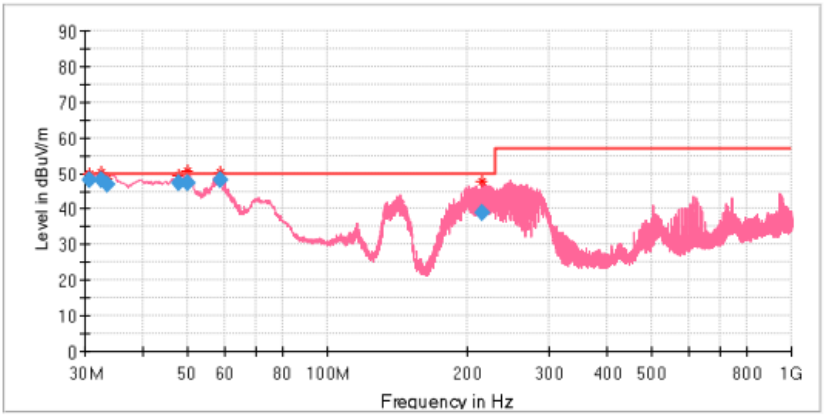

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.625527	49.94	50.00	0.06	100.0	V	83.0	18.7
32.603000	50.20	50.00	-0.20	100.0	V	100.0	19.1
33.467725	48.72	50.00	1.28	100.0	V	83.0	19.4
47.803900	49.34	50.00	0.66	100.0	V	122.0	20.7
49.859500	50.58	50.00	-0.58	100.0	V	106.0	20.7
58.718225	50.43	50.00	-0.43	100.0	V	79.0	20.2
215.661325	47.68	50.00	2.32	100.0	V	22.0	17.6

Final_Result

Frequency (MHz)	QuasiPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.625527	48.31	50.00	1.69	1000.0	120.000	100.0	V	84.0	18.7
32.603000	47.96	50.00	2.04	1000.0	120.000	100.0	V	100.0	19.1
33.467725	47.05	50.00	2.95	1000.0	120.000	100.0	V	84.0	19.3
47.803900	47.17	50.00	2.83	1000.0	120.000	100.0	V	122.0	20.7
49.859500	47.27	50.00	2.73	1000.0	120.000	100.0	V	106.0	20.7
58.718225	48.16	50.00	1.84	1000.0	120.000	100.0	V	79.0	20.2
215.661325	38.74	50.00	11.26	1000.0	120.000	100.0	V	22.0	17.6


2026-09-28

TÜV Rheinland (Shenzhen) Co., Ltd. Chamber : 10m SAC

Test Report

EUT Information

EUT Name:	S11 3D Camera
Model:	MRDVS-SA822-5EE-940A
Test Mode:	On
Test Voltage:	DC 24V
Temp/Hum	Temp:23.3℃; Humi:50.2%
Test standard:	EN IEC 61000-6-4
Tested By:	Aric Wang
Reviewed by:	Charlie Zha

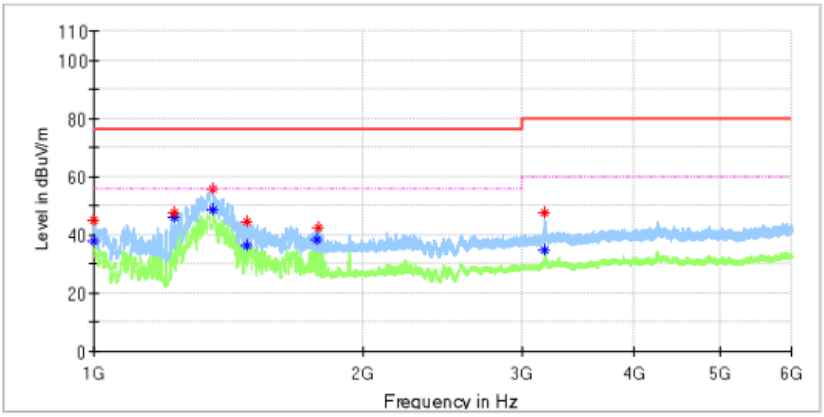

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.625000	45.02	---	76.00	30.98	100.0	H	241.0	-9.7
1001.562500	---	37.81	56.00	18.19	100.0	H	241.0	-9.7
1228.437500	---	45.89	56.00	10.11	100.0	H	346.0	-10.1
1228.437500	47.61	---	76.00	28.39	100.0	H	346.0	-10.1
1355.312500	55.60	---	76.00	20.40	100.0	H	319.0	-9.1
1356.250000	---	48.51	56.00	7.49	100.0	H	319.0	-9.1
1482.187500	---	36.36	56.00	19.64	100.0	H	233.0	-8.2
1482.187500	44.46	---	76.00	31.54	100.0	H	233.0	-8.2
1771.250000	---	38.60	56.00	17.40	100.0	H	207.0	-7.2
1778.437500	42.57	---	76.00	33.43	100.0	H	216.0	-7.1
3185.625000	47.81	---	80.00	32.19	100.0	H	92.0	-1.3
3185.937500	---	34.89	60.00	25.11	100.0	H	92.0	-1.3

Final_Result

Frequency (MHz)	MaxPeak (dBuV/	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---


2026-10-09

TÜV Rheinland (Shenzhen) Co., Ltd. Chamber : 10m SAC

Test Report

EUT Information

EUT Name:	S11 3D Camera
Model:	MRDVS-SA822-5EE-940A
Test Mode:	On
Test Voltage:	DC 24V
Temp/Hum	Temp:23.3℃; Humi:50.2%
Test standard:	EN IEC 61000-6-4
Tested By:	Aric Wang
Reviewed by:	Charlie Zha

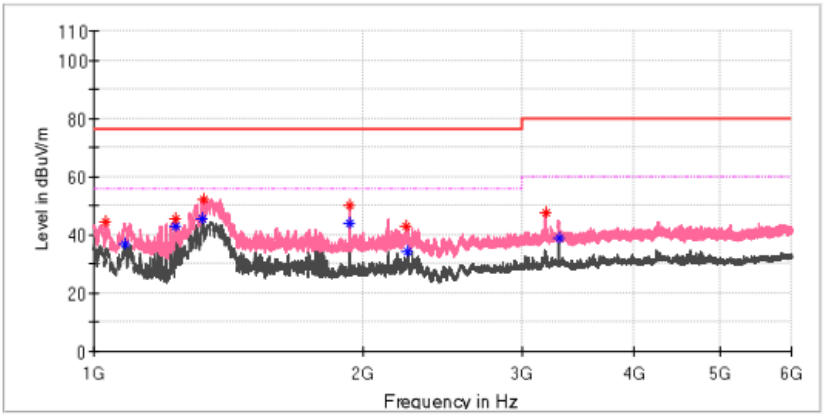

Critical_Freqs

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1032.187500	44.49	---	76.00	31.51	100.0	V	200.0	-10.1
1085.312500	---	37.03	56.00	18.97	100.0	V	177.0	-9.9
1235.625000	---	43.04	56.00	12.96	100.0	V	49.0	-10.1
1235.625000	45.57	---	76.00	30.43	100.0	V	49.0	-10.1
1322.500000	---	45.37	56.00	10.63	100.0	V	41.0	-9.1
1325.000000	52.26	---	76.00	23.74	100.0	V	41.0	-9.1
1929.687500	49.95	---	76.00	26.05	100.0	V	101.0	-6.4
1930.312500	---	43.99	56.00	12.01	100.0	V	101.0	-6.3
2234.375000	43.15	---	76.00	32.85	100.0	V	134.0	-5.5
2237.812500	---	34.14	56.00	21.86	100.0	V	134.0	-5.5
3196.875000	47.71	---	80.00	32.29	100.0	V	248.0	-1.4
3300.000000	---	39.07	60.00	20.93	100.0	V	193.0	-0.2

Final_Result

Frequency (MHz)	MaxPeak (dBuV/	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---		---	---

2026-10-09

Measurement Uncertainties

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus.

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Table 1: Measurement Uncertainty levels

Test	Parameters	Expanded uncertainty (U_{lab})	Expanded uncertainty (U_{cispr})
Conducted Emission_AMN	Level accuracy (9kHz to 150kHz) (150kHz to 30MHz)	± 3.24 dB ± 3.24 dB	± 3.8 dB ± 3.4 dB
Conducted Emission_AAN	Level accuracy (150kHz to 30MHz) CAT3 (150kHz to 30MHz) CAT5 (150kHz to 30MHz) CAT6	± 3.22 dB ± 2.87 dB ± 3.10 dB	± 5.0 dB
Conducted Emission_CP	Level accuracy (150kHz to 30MHz)	± 2.80 dB	± 2.9 dB
Disturbance Power	Level accuracy (30MHz to 300MHz)	± 3.36 dB	± 4.5 dB
Electromagnetic Radiated Emission (Triple-loop)	Level accuracy (9kHz to 30MHz)	± 3.26 dB	± 3.3 dB
Radiated Emission (3m SAC)	Level accuracy (30MHz to 1000MHz)	± 4.53 dB	± 6.3 dB
	Level accuracy (1GHz- 6GHz)	± 4.44 dB	± 5.2 dB
	Level accuracy (6GHz- 18GHz)	± 4.53 dB	± 5.5 dB
Radiated Emission (10m SAC)	Level accuracy (30MHz to 1000MHz)	± 4.39 dB	± 6.3 dB
	Level accuracy (1GHz- 6GHz)	± 4.35 dB	± 5.2 dB
	Level accuracy (6GHz- 18GHz)	± 4.46 dB	± 5.5 dB
Mains Harmonic	Current	± 4.60%	N/A
Voltage Fluctuations & Flicker	Voltage	± 0.64%	N/A

As U_{lab} in all applicable tests listed above are less than U_{cispr} according to CISPR 16-4-2:2011+A1:2014+A2:2018,

- compliance is deemed to occur if no measured disturbance exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance exceeds the disturbance limit.