





FUZHOU CONSSIN LIGHTING CO.,LTD

PRODUCT SPECIFICATION

Product Model: KFL1S-600-A AC LED flood light

Item	Description	Remarks
Rated power	600W	
Operating voltage (Frequency)	AC 200~480V, 50/60Hz	
Rated input current	2. 5A/240VAC 1. 25A/480VAC	
LED type	SMD	
CCT	5000K	optional 2700-6500K
CRI	Ra70	optional Ra80/90
Luminous efficiency	130 Lm/w	
Luminous flux for luminaire	78000 Lm	
Protection standard	IP67	
IK standard	IK 10	
Operating temperature	-40℃~+50℃	
Application	Mining /construction site/Port/Stadium	
Power factor	>0.9	
Driver Efficiency	>95%	
Warranty period	5 years	
Life time	50,000 hours	
Measurement	313mm×446mm×357mm	
Light distribution	30° ×50°	option Asymmetric
Weight(kg)	15.5 Kg	

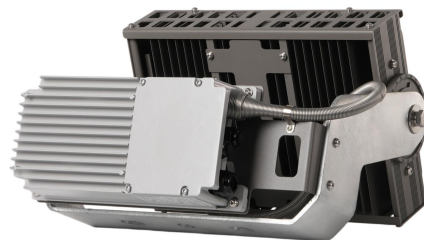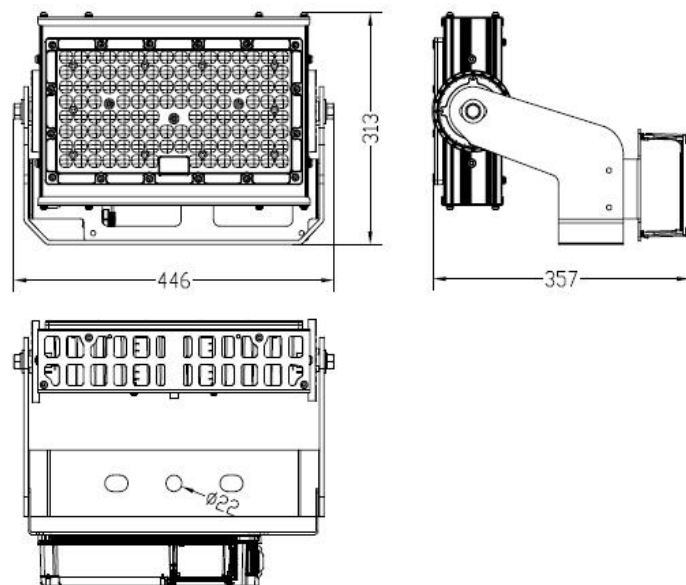



FUZHOU CONSSIN LIGHTING CO.,LTD

PRODUCT SPECIFICATION

Product Model: KFL1S-600-B AC LED flood light

Item	Description	Remarks
Rated power	600W	
Operating voltage (Frequency)	AC 200~480V, 50/60Hz	
Rated input current	2. 5A/240VAC 1. 25A/480VAC	
LED type	SMD	
CCT	5000K	optional 2700-6500K
CRI	Ra70	optional Ra80/90
Luminous efficiency	130 Lm/w	
Luminous flux for luminaire	78000 Lm	
Protection standard	IP67/IP69	
IK standard	IK 10	
Operating temperature	-40℃~+50℃	
Application	Mining /construction site/Port/Stadium	
Power factor	>0.9	
Driver Efficiency	>95%	
Warranty period	5 years	
Life time	50,000 hours	
Measurement	313mm×446mm×265mm	
Light distribution	30° ×50°	option Asymmetric
Weight(kg)	12.5 Kg	

