

# NVIDIA DLSS Super Resolution (version 3.7.0)

Programming Guide

Document revision: 3.7.0

Released: March 2024

Copyright NVIDIA Corporation. © 2018-2024.

# Table of Contents

## Contents

<b>Table of Contents</b> .....	<b>i</b>
<b>Abstract</b> .....	<b>v</b>
<b>Revision History</b> .....	<b>v</b>
<b>1 Introduction</b> .....	<b>1</b>
<b>2 Getting Started</b> .....	<b>1</b>
2.1 System Requirements.....	1
2.2 Rendering Engine Requirements .....	2
2.3 Querying for DLSS Support on End User System .....	2
2.3.1 Querying for Vulkan Extensions .....	4
2.4 Getting the Latest Updates.....	5
DLSS Execution Times & GPU RAM Usage .....	5
2.5 DLSS Deployment Checklist.....	6
<b>3 DLSS Integration</b> .....	<b>8</b>
3.1 Pipeline Placement .....	8
3.1.1 DLSS During Early Phase Post Processing .....	8
3.1.2 Color Ranges for LDR and HDR .....	8
3.2 Integration Overview .....	9
3.2.1 DLSS Execution Modes.....	9
3.2.2 Dynamic Resolution Support .....	10
3.2.2.1 Dynamic Resolution Caveats.....	11
3.3 Supported Formats .....	12
3.3.1 Supported Resolutions .....	12
3.4 Resource States.....	13
3.5 Mip-Map Bias .....	13
3.5.1 Mip-Map Bias Caveat: High-Frequency Textures .....	14
3.6 Motion Vectors .....	15
3.6.1 Motion Vector Format & Calculations.....	15
3.6.1.1 Dense Motion Vector Resolve Shader .....	17
3.6.2 Motion Vector Flags.....	18

3.6.3	Motion Vector Scale .....	18
3.6.4	Conservative raster on Motion Vector for thin features.....	18
3.7	Sub-Pixel Jitter.....	20
3.7.1	Jitter Sample Patterns.....	20
3.7.1.1	Pattern Phases.....	21
3.7.2	Rendering with Jitter Offsets.....	21
3.7.3	Required Jitter Information .....	22
3.7.4	Troubleshooting Jitter Issues.....	23
3.8	Depth Buffer.....	23
3.8.1	Depth Buffer Flags .....	24
3.9	Exposure Parameter.....	24
3.9.1	Diagnosing bad exposure with the visualizer .....	24
3.9.2	Pre-Exposure Factor .....	26
3.10	Auto-exposure .....	26
3.11	Additional Sharpening.....	27
3.12	DLSS Presets.....	27
3.12.1	Preset Selection Behavior with OTA updates .....	28
3.13	Scene Transitions .....	28
3.14	VRAM Usage.....	29
3.15	Biasing the Current Frame .....	29
3.16	Alpha Upscaling Support.....	30
3.17	Multi-view and Virtual Reality Support.....	30
3.18	Current DLSS Settings.....	30
3.18.1	DLSS Information Lines & Debug Hotkeys .....	31
3.18.1.1	Jitter Offset Configurations.....	32
3.19	NGX Logging.....	33
3.20	Sample Code .....	34
3.21	Integrating DLSS using Streamline SDK.....	34
<b>4</b>	<b>Distributing DLSS in a Game .....</b>	<b>34</b>
4.1	DLSS Release Process .....	34
4.2	Distributable Libraries.....	34
4.2.1	Removing the DLSS Library .....	35
4.2.2	Signing the DLSS Library .....	35

4.2.3	Notice of inclusion of third-party code.....	35
<b>5</b>	<b>DLSS Code Integration.....</b>	<b>35</b>
5.1	Adding DLSS to a Project.....	35
5.1.1	Linking the NGX SDK on Windows.....	36
5.1.2	Linking the NGX SDK on Linux.....	36
5.2	Initializing NGX SDK Object.....	36
5.2.1	Project ID.....	40
5.2.2	Engine Type.....	40
5.2.3	Engine Version.....	40
5.2.4	Thread Safety.....	40
5.2.5	Contexts and Command Lists.....	40
5.2.6	Verifying Availability of NGX Features and Allocating Parameter Maps.....	41
5.2.7	Overriding Feature Denial.....	45
5.2.8	Obtaining the Optimal Settings for DLSS.....	45
5.2.8.1	Optimal resolution settings query:.....	46
5.3	Feature Creation.....	46
5.4	Feature Evaluation.....	48
5.4.1	Vulkan Resource Wrapper.....	50
5.5	Feature Disposal.....	50
5.6	Shutdown.....	51
5.7	Init and Shutdown More than Once.....	51
<b>6</b>	<b>Resource Management.....</b>	<b>51</b>
6.1	D3D11 Specific.....	52
6.2	D3D12 Specific.....	52
6.3	Vulkan Specific.....	53
6.4	Common.....	53
<b>7</b>	<b>Multi GPU Support.....</b>	<b>53</b>
7.1	Linked Mode.....	53
7.2	Unlinked mode.....	54
<b>8</b>	<b>Troubleshooting.....</b>	<b>54</b>
8.1	Common Issues Causing Visual Artifacts.....	54
8.2	DLSS Debug Overlay.....	55
8.3	DLSS Debug Accumulation Mode.....	56

8.4	Jitter Troubleshooting.....	56
8.4.1	Initial Jitter Debugging.....	57
8.4.2	In-depth Jitter Debugging.....	58
8.4.2.1	Single quadrant jitter debugging.....	58
8.4.2.2	Four quadrant jitter debugging.....	60
8.5	Linux.....	60
8.6	Known Tooling Issues.....	61
8.7	Error Codes .....	61
<b>9</b>	<b>Appendix.....</b>	<b>63</b>
9.1	Transitioning from DLSS 2.1.x to 3.1.x .....	63
9.2	Transitioning from DLSS 2.0.x to 2.1.x .....	63
9.3	Minor Revision Updates.....	63
9.4	Future DLSS Parameters .....	63
9.5	Notices .....	64
9.5.1	Trademarks .....	66
9.5.2	Copyright .....	66
9.6	3rd Party Software .....	66
9.6.1	CURL.....	66
9.6.2	8x13 BITMAP FONT.....	66
9.6.3	d3dx12.h.....	67
9.6.4	xml .....	67
9.6.5	npv .....	68
9.6.6	stb .....	68
9.6.7	DirectX-Graphics-Samples .....	69
9.7	Linux driver compatibility .....	69

# Abstract

The DLSS Programming Guide provides details on how to integrate and distribute DLSS in a game or 3D application. The Guide also provides embedded sample code and links to a full sample implementation on GitHub.

For information on using DLSS in Unreal Engine or Unity, please see <https://www.unrealengine.com/marketplace/en-US/product/nvidia-dlss> and <https://docs.unity3d.com/2021.2/Documentation/Manual/deep-learning-super-sampling.html> respectively.

## Revision History

Revision	Changes	Date
3.6	- Added experimental alpha upscaling support	11/7/2023
3.5.10	- Updated Halton Sequence Recommendation	10/6/2023
3.1.13	Add DLAA as a Performance Quality Mode Add NVSDK_NGX_DLSS_Hint_Render_Preset_G Enum	5/4/2023
3.1	- Add GetFeatureReqs API - Add UpdateFeature API - Add Vulkan Extensions Query API	1/19/2023
2.5.1	- Added preset selection section	1/4/2023
2.4.1	- Cleaning up legacy footer	10/24/2022
2.4	- Minor bug fixes and performance improvements - Added Streamline SDK pointers - Added Linux capability section	3/21/2022
2.3.2	- Removed reference to DLSS Sharpening - Removed reference to UltraQuality in Execution modes due to user confusion	03/08/2022
2.3.1	- Added a debug visualization to help diagnose exposure scale issues.	09/30/2021

2.2.3	<ul style="list-style-type: none"> <li>- Adjusted the Texture LOD Bias recommendation for preservation of sharpness and intricate detail.</li> <li>- Added a few details to the Advanced Jitter debugging section.</li> <li>- Added a section about using conservative raster for improving the appearance of thin features</li> </ul>	09/02/2021
2.2.2	<ul style="list-style-type: none"> <li>- Updated based on easier access for DLSS SDK</li> <li>- Updated for Linux Support</li> </ul>	7/12/2021
2.2.1	<ul style="list-style-type: none"> <li>- Update NVSDK NGX_VULKAN_RequiredExtensions() usage</li> <li>- Clarified that Vulkan application needs to run on Vulkan 1.1 or later</li> </ul>	5/26/2021
2.2.0	<ul style="list-style-type: none"> <li>- Added section on DLSS Auto-exposure</li> <li>- Slightly clarified the expected exposure value</li> </ul>	4/9/2021
2.1.10	<ul style="list-style-type: none"> <li>- Removed reference to DLSS Application Process</li> </ul>	3/3/2021
2.1.9	<ul style="list-style-type: none"> <li>- Update Resource States for Vulkan.</li> </ul>	2/12/2021
2.1.8	<ul style="list-style-type: none"> <li>- Added override for denied feature.</li> </ul>	1/29/2021
2.1.7	<ul style="list-style-type: none"> <li>- Added new entry points for NGX SDK.</li> <li>- Added information about new entry parameters.</li> <li>- Added information for new return error code.</li> <li>- Added information about post processing shaders that require depth buffer</li> </ul>	1/13/2021
2.1.6	<ul style="list-style-type: none"> <li>- Added section 3.6.3 Motion Vector Scale</li> </ul>	12/10/2020
2.1.5	<ul style="list-style-type: none"> <li>- Slightly clarified the usage of DLSS with multiple views, to make it clearer that it is not only for use with VR, but can be used in any multi-view use case</li> </ul>	12/2/2020
2.1.4	<ul style="list-style-type: none"> <li>- Added information about the proper use of the SDK API version value passed into the SDK at SDK initialization time</li> <li>- Added information about the NGX app logging hook API</li> </ul>	11/2/2020
2.1.3	<ul style="list-style-type: none"> <li>- Added section on VRAM usage</li> <li>- Added section on the current frame biasing</li> <li>- Fixed link to sample code on GitHub</li> <li>- Clarified motion vector resolution &amp; dilation requirements</li> </ul>	9/18/2020

	<ul style="list-style-type: none"> <li>- Added section on the JitterOffset debug overlay</li> <li>- Updated DLSS execution times</li> </ul>	
2.1.2	<ul style="list-style-type: none"> <li>- Fixed section 5 to include new parameters</li> <li>- Added caveat to mip-mapping section for high frequency textures</li> <li>- Removed unused parameters from depth buffer section</li> </ul>	7/2/2020
2.1.1	<ul style="list-style-type: none"> <li>- Clarified the mipmap bias requirement</li> <li>- Added section on Dynamic Resolution</li> <li>- Added section on DLSS in VR applications</li> <li>- Added section on the Exposure &amp; Pre-Exposure parameters</li> <li>- Added section on DLSS Sharpness</li> <li>- Removed DLSS v1 transition notes from the Appendix</li> </ul>	6/26/2020
2.0.2	<ul style="list-style-type: none"> <li>- Added section describing the Depth Buffer parameter</li> </ul>	4/10/2020
2.0.1	<ul style="list-style-type: none"> <li>- Clarified SwapJitter debugging hotkey</li> <li>- Added section listing the JitterConfig debugging configurations</li> </ul>	3/26/2020
2.0.0	<ul style="list-style-type: none"> <li>- General edits throughout the document to update for DLSS v2</li> <li>- Added renderer requirements</li> <li>- Added DLSS execution times</li> <li>- Added deployment checklist</li> <li>- Added section on jitter troubleshooting</li> <li>- Added section on resource states</li> <li>- Added section on DLSS debug logging</li> </ul>	3/23/2020
1.3.9	<ul style="list-style-type: none"> <li>- Added Vulkan Resource Metadata Wrapper</li> <li>- Fix bugs with debug overlay</li> </ul>	11/08/2019
1.3.8	<ul style="list-style-type: none"> <li>- Better explain motion vectors and added diagrams</li> <li>- Added detail on expected jitter and new debug mode</li> <li>- Further clarified LDR/HDR processing modes</li> <li>- Removed two resources and the associated data structures recently added to the SDK: camera vectors and transformation matrices</li> <li>- Fixed SDK enum and struct nomenclature to match the policy.</li> <li>- Added feature path list parameter to SDK API entry points in which feature DLL can be searched.</li> </ul>	11/05/2019



1.3.7	- Added sample code to check for minimum driver version	10/15/2019
1.3.6	- Added information regarding on-screen debug info (3.7) - Added definition of LDR/SDR and HDR (3.1.3) - Added section describing future DLSS resources that are being considered by NVIDIA researchers - Clarified wording in the Code Integration sections	10/10/2019
1.3.5	- Updated section 3.5 regarding jitter pattern recommendation	9/13/2019
1.3.4	- MipMap LOD bias section - Clarified required/supported formats for various buffers - Updated initialization and feature creation sections (5.x) for new parameters, flags and options.	9/11/2019
1.3.3	- Updated Pipeline Placement section to include both placement options (pre post processing, and after post). - Added troubleshooting section on Specular Aliasing	9/06/2019
1.3.2	- Updated Section 3.1 Pipeline Placement	9/06/2019
1.3.1	- Updates to various sections for ease of integration - Added Transitioning from DLSS 1.2.x to DLSS 1.3.x section 9.1 - Added New parameters for DLSS 1.3.x section 9.2	8/28/2019
1.2.0.0	- Added notice about approval requirements - Added section on jitter - Clarified motion vector requirements - Added dedicated section for buffer formats	8/15/2019
1.1.0.0	- Added sections for motion vectors, format support and pipeline integration. - Alignment of doc version number with DLSS release version - Support for debug overlays - Deprecated scratch buffer setup - Added links to sample code	7/08/2019
1.0.0.7	- Support for Vulkan titles - VS 2012 & VS 2013 static lib inclusion	5/17/2019

1.0.0.6	<ul style="list-style-type: none"><li>- Inclusion of DLSS Sample Code (section 5 &amp; 6)</li><li>- Inclusion of RTX Developer Guidelines in SDK docs</li><li>- General document cleanup</li></ul>	4/10/2019
1.0.0.5	<ul style="list-style-type: none"><li>- Initial release</li></ul>	March 2019

# 1 Introduction

The NVIDIA DLSS technology provides smart: feature enhancement, anti-aliasing and upscaling, in a highly performant library. The library is tuned to take advantage of the latest features of NVIDIA RTX GPUs. Using DLSS, developers can dedicate more frame time to high-end rendering techniques and effects to enhance the visual experience while still maintaining high framerates.

DLSS is built and distributed as a feature of NVIDIA NGX which itself is one of the core components of NVIDIA RTX (<https://developer.nvidia.com/rtx>). NVIDIA NGX makes it easy to integrate pre-built AI based features into games and applications. As an NGX feature, DLSS takes advantage of the NGX update facility. When NVIDIA improves DLSS, the NGX infrastructure can be used to update DLSS for a specific title on all clients which currently have the game installed.

There are three main components that make up the underlying NGX system:

1. **NGX SDK:** The SDK provides CUDA, Vulkan, DirectX 11 and DirectX 12 API's for applications to use the NVIDIA supplied AI features. This document covers how to integrate the DLSS feature into a game or application using the DLSS SDK (which is modelled on the NGX SDK but stands separately).
2. **NGX Core Runtime:** The NGX Core Runtime is a system component which determines which shared library to load for each feature and application (or game). The NGX runtime module is always installed to the end-user's system as part of the NVIDIA Graphics Driver if supported NVIDIA RTX hardware is detected.
3. **NGX Update Module:** Updates to NGX features (including DLSS) are managed by the NGX Core Runtime itself. When a game or application instantiates an NGX feature, the runtime calls the NGX Update Module to check for new versions of the feature that is in use. If a newer version is found, the NGX Update Module downloads and swaps the DLL for the calling application.

## 2 Getting Started

### 2.1 System Requirements

The following is needed to load and run DLSS for both Windows and Linux:

- NVIDIA RTX GPU (GeForce, Titan or Quadro)
- The latest [NVIDIA Graphics Driver](#) is recommended. At a minimum for running DLSS 2.4.11+, you must have NVIDIA driver issued after March 3, 2022 (for instance 512.15). Please see Section 9.6 for Linux Driver Compatibility information.

The following is needed to load and run DLSS on Windows:

- Windows PC with Windows 10 v1709 (Fall 2017 Creators Update 64-bit) or newer

- The development environment for integrating the DLSS SDK into a game is:
  - o Microsoft Visual Studio 2015 or newer.
  - o Microsoft Visual Studio 2012 and 2013 are supported but may be deprecated in the future.

The following is needed to load and run DLSS on Linux:

- Linux kernel, 2.6.32 and newer
- DLSS SDK: glibc 2.11 or newer
- DLSS SDK Sample Code: gcc and g++ 8.4.0 or newer

## 2.2 Rendering Engine Requirements

The DLSS algorithm builds a high-resolution output buffer from information gathered over a series of frames. This document details what is needed to properly integrate DLSS and should be read in its entirety. As a summary, for DLSS to function with a high image quality, the rendering engine **must**:

- DirectX11, DirectX 12, or Vulkan based
  - o **Additional note for Vulkan:** The Vulkan path of DLSS expects the application to run on a Vulkan version 1.1 or later.
- On each evaluate call (i.e. each frame), provide:
  - o The raw color buffer for the frame (in HDR or LDR/SDR space).
  - o Screen space motion vectors that are: accurate and calculated at 16 or 32 bits per-pixel; and updated each frame.
  - o The depth buffer for the frame.
  - o The exposure value (if processing in HDR space).
- Allow for sub-pixel viewport jitter and have good pixel coverage with at least 16 jitter phases (32 or more is preferred).
- Initialize NGX and DLSS using a valid `ProjectID` (See Section 5.2.1).
- The ability to negatively bias the LOD for textures and geometry.

To allow for future compatibility and ease ongoing research by NVIDIA, the engine can also *optionally* provide additional buffers and data. For information on these, see section 9.4.

## 2.3 Querying for DLSS Support on End User System

Integrating Applications can query whether the end user system has the right bits for DLSS support. Additionally, this can be determined before any real device is created or NGX is initialized by using the '

GetFeatureRequirements ' APIs:

```
NVSDK_NGX_Result NVSDK_NGX_D3D11_GetFeatureRequirements(  
IDXGIAdapter *Adapter,  
const NVSDK_NGX_FeatureDiscoveryInfo *FeatureDiscoveryInfo,  
NVSDK_NGX_FeatureRequirement *OutSupported);
```

**Note:** This helper detects NGX feature support for only static system conditions and the feature may still be determined to be unsupported at runtime when using other SDK entry points (i.e. not enough device memory may be available).

**FeatureDiscoveryInfo** contains information common to all NGX Features - required for Feature discovery, Initialization and Logging:

**OutSupported** is a pointer to a *NVSDK\_NGX\_FeatureRequirement* structure. The Application should check the values returned in OutSupported if *NVSDK\_NGX\_Result\_Success* is returned

```
typedef struct NVSDK_NGX_FeatureDiscoveryInfo  
{  
    NVSDK_NGX_Version SDKVersion;  
    NVSDK_NGX_Feature FeatureID;  
    NVSDK_NGX_Application_Identifier Identifier;  
    const wchar_t* ApplicationDataPath;  
    const NVSDK_NGX_FeatureCommonInfo* FeatureInfo;  
} NVSDK_NGX_FeatureDiscoveryInfo;
```

**SDKVersion** should be set to *NVSDK\_NGX\_Version\_API*

For DLSS, Set **FeatureID** to *NVSDK\_NGX\_Feature\_SuperSampling*.

**Identifier** is a *NVSDK\_NGX\_Application\_Identifier* type

**ApplicationDataPath** is a local system path to store logs and other temporary files (write access required)

**FeatureInfo** is Information Common to all NGX Features. Currently is a list of paths that NGX can scan to find Feature specific dlls. In case of of DLSS – *nvngx\_dlss.dll*

```

typedef struct NVSDK NGX_Application_Identifier
{
    NVSDK NGX_Application_Identifier_Type IdentifierType;
    union v {
        NVSDK NGX_ProjectIdDescription ProjectDesc;
        unsigned long long ApplicationId;
    } v;
} NVSDK NGX_Application_Identifier;

```

**IdentifierType:** Whether using a NVSDK NGX\_ProjectIdDescription or an Unique Application Identifier

**ProjectDesc:** If using NVSDK NGX\_ProjectIdDescription, this contains the project ID and engine info required to identify this app

**ApplicationId:** If not using NVSDK NGX\_ProjectIdDescription, this contains an ID provided by NVIDIA for this app. If your NVIDIA contact did not provide you an ID for this purpose, use ProjectDesc with NVSDK NGX\_ENGINE\_TYPE\_CUSTOM as the engine type

```

typedef struct NVSDK NGX_FeatureRequirement
{
    NVSDK NGX_Feature_Support_Result FeatureSupported;
    unsigned int MinHWArchitecture;
    char MinOSVersion[255];
} NVSDK NGX_FeatureRequirement;

```

**FeatureSupported:** one of the values in NVSDK NGX\_Feature\_Support\_Result. For DLSS, Is equal to NVSDK NGX\_FeatureSupportResult\_Supported if NVSDK NGX\_Feature\_SuperSampling is supported.

**MinHWArchitecture:** Returned HW Architecture value corresponding to NV\_GPU\_ARCHITECTURE\_ID values defined in NvAPI GPU Framework required for Feature Support

**MinOSVersion:** String value corresponding to minimum OS version required for NGX Feature Support

### 2.3.1 Querying for Vulkan Extensions

Applications utilizing the Vulkan API must identify Vulkan Device / Instance Extensions required for NGX Feature support using the 'GetFeatureDeviceExtensionRequirements' and 'GetFeatureInstanceExtensionRequirements' APIs :

```

NVSDK NGX_Result NVSDK NGX_VULKAN_GetFeatureDeviceExtensionRequirements(
const VkInstance Instance,
const VkPhysicalDevice PhysicalDevice,
const NVSDK NGX_FeatureDiscoveryInfo *FeatureDiscoveryInfo,
uint32_t *InOutExtensionCount,
VkExtensionProperties **OutExtensionProperties);

```

```

NVSDK NGX_Result NVSDK NGX_VULKAN_GetFeatureInstanceExtensionRequirements(

```

```
const NVSDK NGX_FeatureDiscoveryInfo *FeatureDiscoveryInfo,
uint32_t *InOutExtensionCount,
VkExtensionProperties **OutExtensionProperties);
```

When **OutExtensionProperties** is NULL, **InOutExtensionCount** will be populated with the number of extensions.

Otherwise **OutExtensionProperties** will point to an array of *VkExtensionProperties* structures.

## 2.4 Getting the Latest Updates

Applications now have the option to opt-in to receive updates to their Presets (section 3.12) via Over the Air (OTA) updates. The following call triggers this update if available

```
NVSDK NGX_Result NVSDK NGX_UpdateFeature(
const NVSDK NGX_Application_Identifier &ApplicationId,
const NVSDK NGX_Feature FeatureID);
```

**ApplicationId:** If not using `NVSDK NGX_ProjectIdDescription`, this contains an ID provided by NVIDIA for this app. If your NVIDIA contact did not provide you an ID for this purpose, use `ProjectDesc` with `NVSDK NGX_ENGINE_TYPE_CUSTOM` as the engine type.

**FeatureID:** Valid `NVSDK NGX_Feature` enum corresponding to DLSS v3 Feature which is being queried for availability

If the update is successful, the update will not be applied until the next time that NGX is Initialized (i.e., `NVSDK NGX_<API>_Init()` is called again. See section 5.2 ). **We recommend using this API, as this will allow NVIDIA to deliver the most up to date IQ and performance improvements to the Application.**

This API should be called on its own dedicated thread. This is because the time taken to download an update can vary based on factors outside of control, such as network connectivity / internet speed.

## DLSS Execution Times & GPU RAM Usage

The exact execution time of DLSS varies from engine to engine and is dependent on the integration. Factors such as how the engine memory manager works and whether additional buffer copies are required can affect the final performance. To give a rough guide, NVIDIA ran the DLSS library using a command line utility (i.e. without a 3D renderer) across the full range of NVIDIA GeForce RTX GPUs and provides these results as a rough estimate of expected execution times. Developers can use these figures to estimate the potential savings DLSS provides.

In this test scenario:

1. The DLSS library allocates some RAM on the GPU internally. The amount of allocated memory can be queried using `NVSDK NGX_DLSS_GetStatsCallback()`. The table below shows approximate amount of RAM allocated depending on output resolution:

	1920x1080	2560x1440	3840x2160	7840x4320
<b>Allocated memory</b>	60.83 MB	97.79 MB	199.65 MB	778.3 MB

**Note** that this is a ballpark number - the actual number can be somewhat different. For instance, using `InEnableOutputSubrects` flags may result in higher memory usage. On the other hand, if your output color buffer has `RGBA16` format, DLSS might be able to use it to store some internal temporary data, and then the amount of allocated memory will be smaller.

2. The DLSS algorithm is executed in 16-bit “Performance Mode” where the input is one quarter the number of pixels as the output:
  - 1920x1080 results are generated from an input buffer size of 960x540 pixels.
  - 2560x1440 results are generated from an input buffer size of 1280x720 pixels.
  - 3840x2160 results are generated from an input buffer size of 1920x1080 pixels.

GeForce GPU	1920x1080	2560x1440	3840x2160	7680x4320
<b>RTX 2060 S</b>	0.61 ms	1.01 ms	2.18 ms	10.07 ms
<b>RTX 2080 TI</b>	0.37 ms	0.58 ms	1.26 ms	5.52 ms
<b>RTX 2080 (laptop)</b>	0.56 ms	0.91 ms	1.98 ms	9.09 ms
<b>RTX 3060 TI</b>	0.45 ms	0.73 ms	1.52 ms	7.01 ms
<b>RTX 3070</b>	0.41 ms	0.66 ms	1.36 ms	5.77 ms
<b>RTX 3080</b>	0.32 ms	0.47 ms	0.94 ms	4.25 ms
<b>RTX 3090</b>	0.28 ms	0.42 ms	0.79 ms	3.45 ms
<b>RTX 4080</b>	0.2 ms	0.37 ms	0.73 ms	2.98 ms
<b>RTX 4090</b>	N/A	N/A	0.51 ms	1.97 ms

## 2.5 DLSS Deployment Checklist

During integration and testing, read and follow this document as a whole and before a game or application is released with DLSS included in it, confirm quality is high and at least the following are true.

Item	Confirmed <input checked="" type="checkbox"/>
------	---



Full production non-watermarked DLSS library (nvngx_dlss.dll) is packaged in the release build (see section 4.2)	<input type="checkbox"/>
Game specific Application ID is used during initialization (see section 5.2.1)	<input type="checkbox"/>
Mip-map bias set when DLSS is enabled (see section 3.5)	<input type="checkbox"/>
Motion vectors for all scenes, materials and objects are accurate (see section 3.6)	<input type="checkbox"/>
Static scenes resolve and compatible jitter confirmed (see section 3.7)	<input type="checkbox"/>
Exposure value is properly sent each frame (or auto-exposure is enabled) (see section 3.9)	<input type="checkbox"/>
DLSS modes are queried and user selectable in the UI (see section 3.2.1 and RTX UI Developer Guidelines) and/or dynamic resolution support is active and tested	<input type="checkbox"/>

# 3 DLSS Integration


## 3.1 Pipeline Placement

The DLSS evaluation call must occur during the post-processing phase of the rendering pipeline before tone mapping. For best image quality place DLSS as close to the start of post processing as possible (before any/as few effects as possible are applied to the frame).

### 3.1.1 DLSS During Early Phase Post Processing

DLSS is best executed at the start of, or very early during, the post processing pipeline. During the call to DLSS, the frame is processed with features enhanced, anti-aliasing applied, and the frame being increased in resolution to the target resolution.

To be clear, if DLSS is placed at the start of post processing, all post effects must be able to handle the increased resolution and not have assumptions that processing can only occur at render resolution.

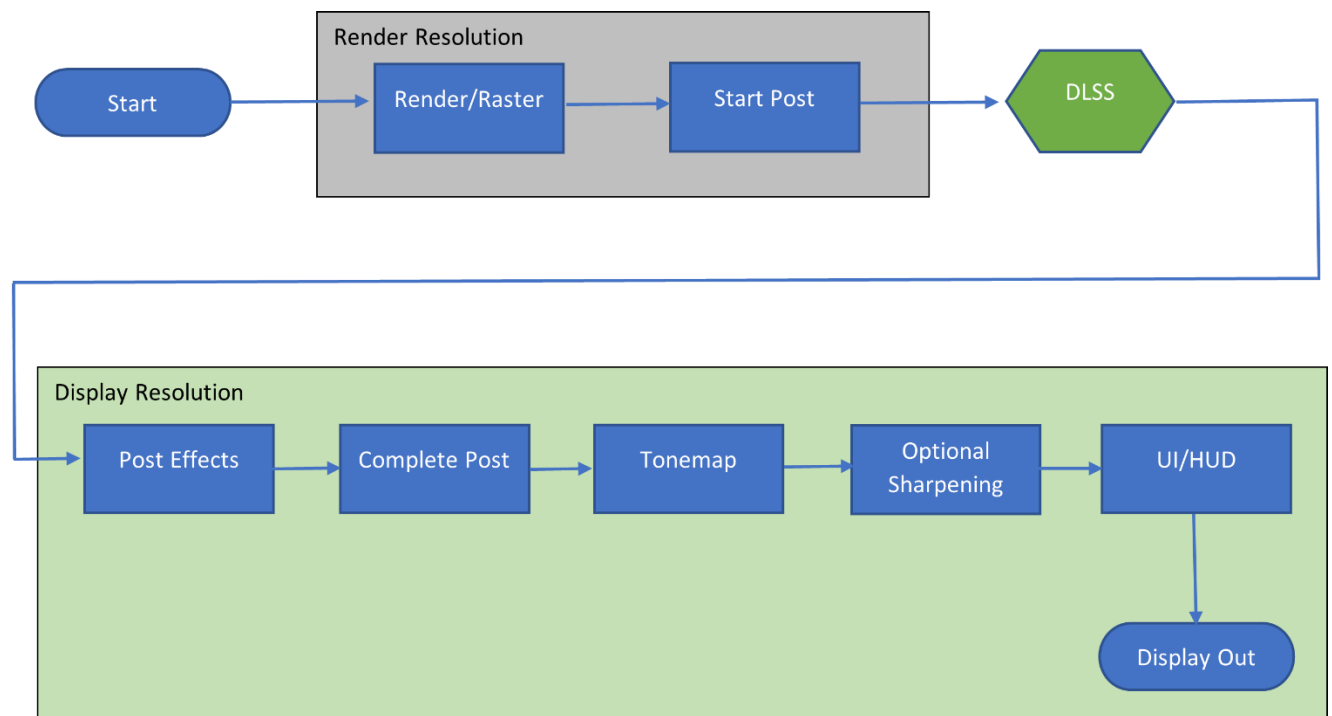

### 3.1.2 Color Ranges for LDR and HDR

DLSS can process color data stored as either LDR (aka SDR) or HDR values. The performance of DLSS is improved in LDR mode but there are some caveats.

1. The range of color values for LDR mode **must be** from 0.0 to 1.0.
2. In LDR mode, DLSS operates at lower precision and quantizes the data to 8 bits. For color reproduction to work at this precision, the input color buffer **must be** in a **perceptually linear**

encoding (like sRGB). This is often the case after tone mapping but is not guaranteed (for example if an HDR display panel is detected the tone mapper still outputs to linear space).

3. In LDR mode, the color data must **not** be provided in linear space. If DLSS processes linear colors in LDR mode, the output from DLSS exhibits visible color banding, color shifting or other visual artifacts.

If the input color buffer sent to DLSS **meets** these requirements, then set DLSS to process using LDR by setting `"NVSDK NGX DLSS Feature Flags IsHDR"` to `"0"`.

If the input color buffer sent to DLSS is stored in linear space or **does not meet** the requirements above for any reason, set the `"NVSDK NGX DLSS Feature Flags IsHDR"` to `"1"`. HDR mode operates internally with high range, high precision colors and can process all luminance values (i.e. there is no upper bound to the acceptable luminance for HDR values).

See section 5.3 for more details on the `"NVSDK NGX DLSS Feature Flags IsHDR"` feature flag.

## 3.2 Integration Overview

DLSS integration comprises the following steps:

1. Initialize NGX and make sure no errors are returned.
2. Check if DLSS is available on the system.
3. Obtain optimal settings for each display resolution and DLSS Execution Mode (see section 3.2.1).
4. Create DLSS feature using helper methods.
5. Evaluate DLSS when upscaling to final resolution.
6. When there are changes to settings which affect DLSS (such as display resolution, toggling RTX, or changing input/output buffer formats) release the current feature and go back to step 3.
7. Perform cleanup and shutdown procedures when DLSS is no longer needed.

**IMPORTANT:** DLSS should only replace the primary upscale pass on the main render target and should not be used on secondary buffers like shadows, reflections etc.

### 3.2.1 DLSS Execution Modes

DLSS processes arbitrary input buffer sizes and outputs the result to an output buffer size of the final display resolution. The input resolutions the game should render to and send to DLSS for processing are determined by querying the `"DLSS Optimal Settings"` for each of the `"PerfQualityValue"` options. There are currently six `"PerfQualityValues"` defined:

1. Performance Mode
2. Balanced Mode
3. Quality Mode

4. Ultra-Performance Mode
5. DLAA (Deep Learning Anti-Aliasing) Mode

Additionally, what is referred to as “DLAA” or Deep Learning Anti-Aliasing refers to when the input and output render sizes are set to the same value (as in a scaling ratio of 1.0) regardless of the Optimal Settings call. This is kept separate as it should be exposed under a different UI option in game. DLAA is also a performance quality mode.

Depending on the DLSS algorithm in use and the game performance levels, DLSS may enable all or some of the modes listed above. All should be checked but sometimes not all are enabled for a given configuration.

The RTX UI Developer Guideline outlines a DLSS Auto Mode. This is not a specific execution mode, but an additional user-friendly mode to map default mode to the current output resolution. (*Please refer to DLSS Auto mode and DLSS mode Defaults sections*)

In the game settings, **only display those modes that are enabled. Completely hide all other modes.** For the enabled modes, allow the end-user to switch between each enabled mode changing the render target resolution to match.

After querying the DLSS Optimal Setting, if more than one mode is enabled, the default selection (unless the user has chosen a specific mode) should be “Auto”, “Quality”, “Balanced”, “Performance”, “Ultra-Performance”.

For information on how to display the user facing DLSS mode selection, please see the “NVIDIA RTX UI Developer Guidelines” (the latest version is on the GitHub repository in the “[docs](#)” directory).

For more details on DLSS Optimal Settings, see section 5.2.8.

### 3.2.2 Dynamic Resolution Support

DLSS supports dynamic resolution whereby the input buffer can change dimensions from frame to frame whilst the output size remains fixed. As such, if the rendering engine supports dynamic resolution, DLSS can be used to perform the required upscale to the display resolution.

**NOTE:** If the output resolution (aka display resolution) changes, DLSS must be reinitialized.

```
static inline NVSDK NGX_Result NGX_DLSS_GET_OPTIMAL_SETTINGS(  
    NVSDK_NGX_Parameter *pInParams,  
    unsigned int InUserSelectedWidth,  
    unsigned int InUserSelectedHeight,  
    NVSDK_NGX_PerfQuality_Value InPerfQualityValue,  
    unsigned int *pOutRenderOptimalWidth,  
    unsigned int *pOutRenderOptimalHeight,  
    unsigned int *pOutRenderMaxWidth,  
    unsigned int *pOutRenderMaxHeight,  
    unsigned int *pOutRenderMinWidth,  
    unsigned int *pOutRenderMinHeight,  
    float *pOutSharpness)
```

To use DLSS with dynamic resolution, initialize NGX and DLSS as detailed in section 5.3. During the DLSS

Optimal Settings calls for each DLSS mode and display resolution, the DLSS library returns the “optimal” render resolution as `pOutRenderOptimalWidth` and `pOutRenderOptimalHeight`. Those values must then be passed exactly as given to the next `NGX_API_CREATE_DLSS_EXT()` call.

DLSS Optimal Settings also returns four additional parameters that specify the permissible rendering resolution range that can be used during the DLSS Evaluate call. The `pOutRenderMaxWidth`, `pOutRenderMaxHeight` and `pOutRenderMinWidth`, `pOutRenderMinHeight` values returned are inclusive: passing values between as well as exactly the Min or exactly the Max dimensions is allowed.

```
typedef struct NVSDK_NGX_Dimensions
{
    unsigned int Width;
    unsigned int Height;
} NVSDK_NGX_Dimensions;

typedef struct NVSDK_NGX_D3D11_DLSS_Eval_Params
{
    ...
    NVSDK_NGX_Dimensions          InRenderSubrectDimensions;
    ...
} NVSDK_NGX_D3D11_DLSS_Eval_Params;

static inline NVSDK_NGX_Result NGX_D3D11_EVALUATE_DLSS_EXT(
    ID3D11DeviceContext *pInCtx,
    NVSDK_NGX_Handle *pInHandle,
    NVSDK_NGX_Parameter *pInParams,
    NVSDK_NGX_D3D11_DLSS_Eval_Params *pInDlssEvalParams)
```

The DLSS Evaluate calls for the supported graphics APIs can accept `InRenderSubrectDimensions` as an additional Evaluation parameter. That specifies the area of the input buffer to use for the current frame and can vary from frame to frame (thus enabling dynamic resolution support).

The subrectangle can be offset in the buffer using `InColorSubrectBase` (or the other `*SubrectBase` parameters) which specify the top-left corner of the subrect.

If the `InRenderSubrectDimensions` passed to DLSS Evaluate are not in the supported range (returned by the DLSS Optimal Settings call), the call to DLSS Evaluate fails with an `NVSDK_NGX_Result_FAIL_InvalidParameter` error code.

**NOTE:** Not all combination of PerfQuality mode, resolution, and ray tracing, support dynamic resolution. Additionally, the Preset chosen for the init-time input size will persist across the lifetime of the feature (presets will not vary even if scaling ratio varies). When dynamic resolution is not supported, the call to `NGX_DLSS_GET_OPTIMAL_SETTINGS` returns the same values for both the minimum and maximum render resolutions. This is also the case for older DLSS libraries that did not support dynamic resolution.

### 3.2.2.1 Dynamic Resolution Caveats

When using dynamic resolution with DLSS, it is important to:

1. Maintain a consistent texture mipmap bias as detailed in section 3.5. To maintain correct display resolution sampling, the mip level should be updated each time the render resolution changes (potentially every frame depending on the update rate of the dynamic resolution system).

If changing the mip bias this often is not feasible, the developer can use an estimated bias or have a limited set of mipmap biases. Some experimentation may be needed to maintain on-screen texture sharpness.

2. To guarantee the accuracy of the DLSS image reconstruction, the aspect ratio of the render size must stay constant with the final display size. NVIDIA suggests calculating the projection matrix with this in mind.

```
// When rendering to a different resolution than the display resolution, ensure
// geometry appears similar once it is scaled up to the whole window/screen
float aspectRatio = displaySize.x / displaySize.y;

// Compute the projection matrix using this aspect ratio (not the Render ratio)
float4x4 projection =
    perspProjD3DStyle(dm::radians(m_CameraVerticalFov), aspectRatio, zNear, zFar);
```

## 3.3 Supported Formats

DLSS uses formatted reads so should handle most input buffer formats. With that said, DLSS expects the following inputs:

1. Color input buffer (the main frame): any supported buffer format for the API.
2. Motion vectors: RG32\_FLOAT or RG16\_FLOAT (for more information see section 3.6.1)
3. Depth buffer: any format with one channel in it (for instance R32\_FLOAT or D32\_FLOAT), as well as any depth-stencil format (for instance D24S8)
4. Output buffer (the destination for the processed full resolution frame): any supported buffer format for the API.
5. Previous Output buffer (used for frame history and accumulation): optional, but if provided should be RGBA16F.

### 3.3.1 Supported Resolutions

The minimum supported output resolution for DLSS is 32x32. Attempting to initialize DLSS with a smaller output resolution will fail with an Invalid Parameter error.

Note: in situations where an application uses a lower resolution, such as for savings while the window is minimized, DLSS should not be called.

There is no specified maximum resolution for DLSS. However, resolutions above 7680 x 4320 may not have been thoroughly tested, and there are no guarantees of performance or quality above this resolution.

## 3.4 Resource States

The game or application calling DLSS must ensure that the buffers passed to DLSS are setup with the right usage flags and are in the correct state at the evaluation call. DLSS requires that the:

1. Input buffers (e.g. color, motion vectors, depth and optionally history, exposure etc.) be in **read state** (also known as a **Shader Resource View**, **HLSL “Texture”** or in Vulkan as a **“Sample Image”**). This also means that in the case of Vulkan these must be created with the **“VK\_IMAGE\_USAGE\_SAMPLED\_BIT”** usage flag. For D3D12 - the state must be **D3D12\_RESOURCE\_STATE\_NON\_PIXEL\_SHADER\_RESOURCE** because those resources will be read by a compute shader.
2. The Output buffer be in **UAV state** (also known as an **HLSL RWTexture** or in Vulkan as a **“Storage Image”**). This also means that in case of D3D12 it has to be created with the **“D3D12\_RESOURCE\_FLAG\_ALLOW\_UNORDERED\_ACCESS”** flag and in case of Vulkan with the **“VK\_IMAGE\_USAGE\_STORAGE\_BIT”** usage flag.

After the evaluate call, DLSS accesses and processes the buffers and may change their state but always transitions buffers back to these known states.

## 3.5 Mip-Map Bias

When DLSS is active, the rendering engine must set the mip-map bias (sometimes called the texture LOD bias) to a value lower than 0. This improves overall image quality as textures are sampled at the *display* resolution rather than the lower render resolution in use with DLSS. NVIDIA recommend using:

```
DlssMipLevelBias = NativeBias + log2(Render XResolution / Display XResolution) - 1.0 + epsilon
```

*As an example, if you use the optimal settings for DLSS Performance mode, the ratio  $\text{Render XResolution} / \text{Display XResolution} = 0.5$ . As a result, the recommended Miplevel bias is -2.0 for this Performance mode.*

- Due to the temporal nature of DLSS, applying the recommended negative LOD Bias to the input can sometimes lead to increased temporal stability, in the form of flickering and/or moiré. This will be highly dependent on the scene content such as texture detail. For those scenes and objects where the flickering can become distracting it will be recommended to adjust the LOD bias to be less aggressive. You can typically try to adjust it on the problematic content but without going above  $\log_2(\text{Render XResolution} / \text{Display XResolution})$ . Anything less than the recommended value will tend to be softer/blurrier, so this is going to be a tradeoff between preservation of detail and aliasing.

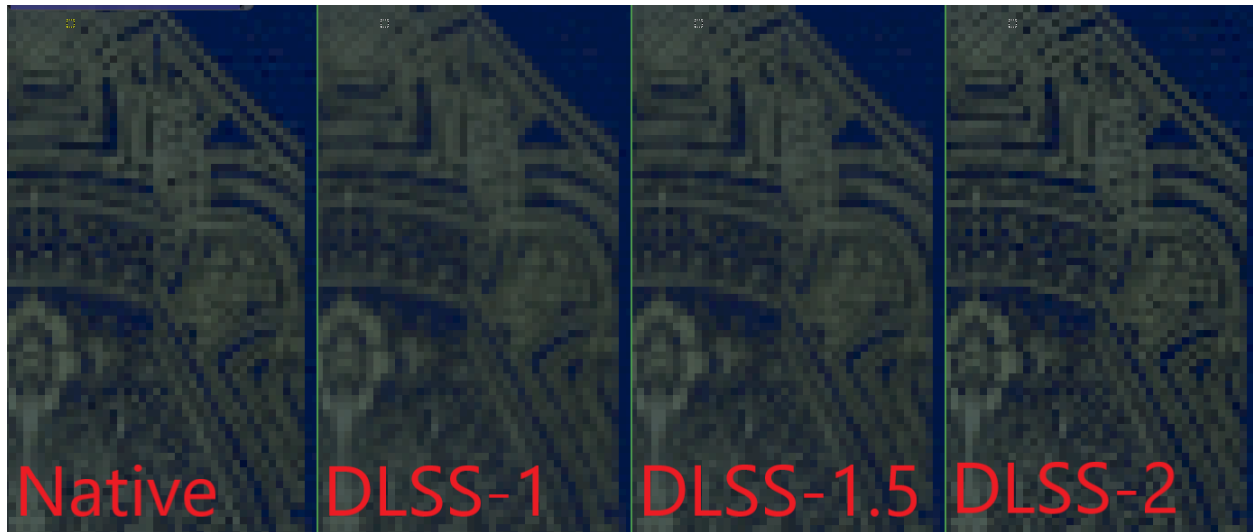


Figure 1. In the example above, we can see that DLSS with a  $-2.0$  Texture LOD Bias is the closest to the native rendering in terms of preservation of details.


**NOTE:** Carefully check texture clarity when DLSS is enabled and confirm that it matches the texture clarity when rendering at native resolution with the default AA method. Pay attention to textures with text or other fine detail (e.g. posters on walls, number plates, newspapers etc).

If there is a negative bias applied during native resolution rendering, some art assets may have been tuned for the default bias. When DLSS is enabled the bias may be too large or too small compared to the default leading to poor image quality. In such case, adjust the “epsilon” for the DLSS mip level bias calculation.

**NOTE:** Some rendering engines have a global clamp for the mipmap bias. If such a clamp exists, disable it when DLSS is enabled.

### 3.5.1 Mip-Map Bias Caveat: High-Frequency Textures

If the mip levels are biased on textures with high frequency patterns, this can lead to artifacts when DLSS tries to reconstruct the full resolution frame. In particular, if trying to simulate an “LED screen”, a “stock ticker” or something similar that uses a texture such as the one below, override the mip-map bias for that material and leave it at the default.

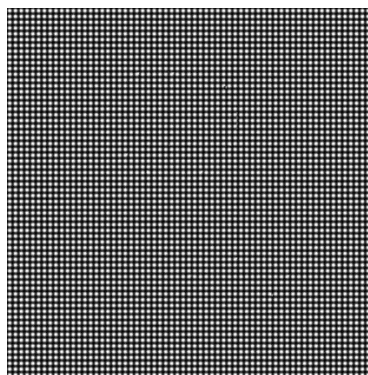



## 3.6 Motion Vectors

DLSS uses per-pixel motion vectors as a key component of its core algorithm. The motion vectors map a pixel from the current frame to its position in the previous frame. That is, when the motion vector for the pixel is added to the pixel's current location, the result is the location the pixel occupied in the previous frame.

**IMPORTANT:** Incorrect or poor precision motion vectors are the most common cause of visual artifacts when DLSS is enabled. Please use a visualizer (such as the debug overlay – see section 8.2) to check motion vectors any time you notice visual artifacts with DLSS.


### 3.6.1 Motion Vector Format & Calculations

Motion vectors must be sent as floats with a render target of format RG32\_FLOAT or RG16\_FLOAT. The X and Y values of the 2D screen-space motion vectors are stored in the red and green channels of the texture in 32-bit or 16-bit floating point format (depending on the format).


The values of each motion vector represent the amount of movement given as the number of pixels calculated in screen space (ie the amount a pixel has moved at the **render resolution**) and assume:

1. Screen space pixel values use [0,0] as the **upper left** of the screen and extend to the full resolution of the **render** target. As an example, if the render target is a 1080p surface, the pixel at the bottom right is [1919,1079].
  - a. DLSS can also optionally accept full resolution motion vectors which are calculated at display resolution. See section 3.6.2 for more information.
2. Motion vectors can be positive or negative (depending on the movement of the scene objects, camera and screen).
3. Motion vectors can include full and partial pixel movements (i.e. [3.0f,-1.0f] and [-0.65f,10.1f] are both valid).


**NOTE:** If the game or rendering engine uses a custom format for motion vectors, it **must** be decoded **before** calling DLSS.

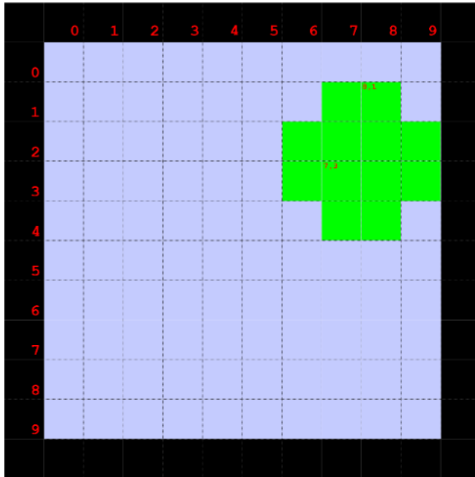

Frame "N-1"

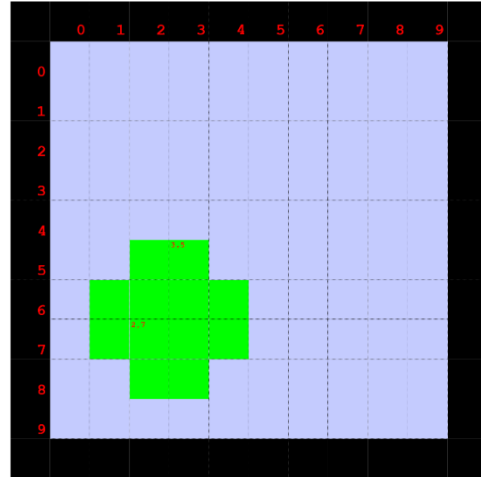

Frame "N"

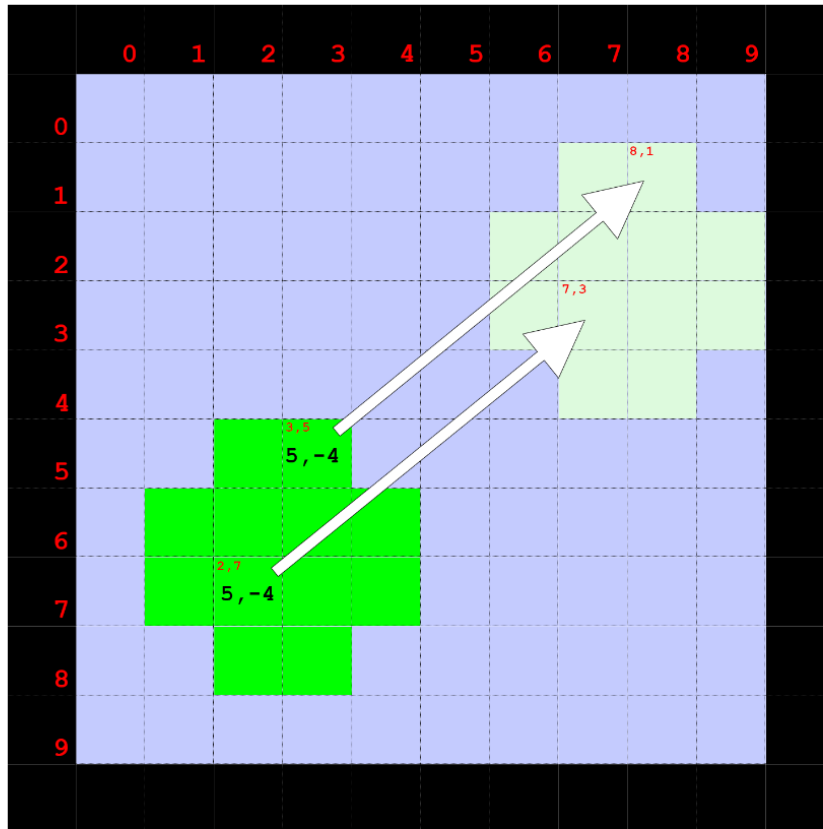

Example motion vector values for Frame "N"

### 3.6.1.1 Dense Motion Vector Resolve Shader

For games that use Unreal Engine 4 or another engine that calculates motion vectors using geometry movement, DLSS requires a slight tweak to the way motion vectors are calculated. Apply a pixel shader like the below to the default motion vector buffer.

**NOTE:** If you use or have merged NVIDIA's custom branch of UE4 with DLSS integrated, this change (or something very similar) has already been applied.

```
Texture2D DepthTexture;
Texture2D VelocityTexture;

float2 UVToClip(float2 UV)
{
    return float2(UV.x * 2 - 1, 1 - UV.y * 2);
}

float2 ClipToUV(float2 ClipPos)
{
    return float2(ClipPos.x * 0.5 + 0.5, 0.5 - ClipPos.y * 0.5);
}

float3 HomogenousToEuclidean(float4 V)
{
    return V.xyz / V.w;
}

void VelocityResolvePixelShader(
    float2 InUV : TEXCOORD0,
    float4 SvPosition : SV_Position,
    out float4 OutColor : SV_Target0
)
{
    OutColor = 0;

    float2 Velocity = VelocityTexture[SvPosition.xy].xy;
    float Depth = DepthTexture[SvPosition.xy].x;

    if (all(Velocity.xy > 0))
    {
        Velocity = DecodeVelocityFromTexture(Velocity);
    }
    else
    {
        float4 ClipPos;
        ClipPos.xy = SvPositionToScreenPosition(float4(SvPosition.xyz, 1)).xy;
        ClipPos.z = Depth;
        ClipPos.w = 1;

        float4 PrevClipPos = mul(ClipPos, View.ClipToPrevClip);

        if (PrevClipPos.w > 0)
        {
            float2 PrevClip = HomogenousToEuclidean(PrevClipPos).xy;
            Velocity = ClipPos.xy - PrevClip.xy;
        }
    }

    OutColor.xy = Velocity * float2(0.5, -0.5) * View.ViewSizeAndInvSize.xy;
```

```
OutColor.xy = -OutColor.xy;
}
```

### 3.6.2 Motion Vector Flags

To ease integration into a wider variety of engines, DLSS accepts motion vectors in several ways. To switch between them (depending on rendering engine requirements) set the flags appropriately during DLSS Feature Creation (see section 5.3).

1. `NVSDK NGX DLSS Feature Flags MVLowRes`: Motion vectors are typically calculated at the same resolution as the input color frame (i.e. at the render resolution). If the rendering engine supports calculating motion vectors at the display/output resolution **and** dilating the motion vectors, DLSS can accept those by setting the flag to "0". This is preferred, though uncommon, and can result in higher quality antialiasing of moving objects and less blurring of small objects and thin details.

For clarity, if standard input resolution motion vectors are sent they do not need to be dilated, DLSS dilates them internally. If display resolution motion vectors are sent, they must be dilated.

2. `NVSDK NGX DLSS Feature Flags MVJittered`: Set this flag to "1" when the motion vectors **do** include sub-pixel jitter. DLSS then internally subtracts jitter from the motion vectors using the jitter offset values that are provided during the "Evaluate" call. When set to "0", DLSS uses the motion vectors directly without any adjustment.

### 3.6.3 Motion Vector Scale


There are cases when an engine has existing motion vectors that do not match the scale or direction required for DLSS. One example, if the motion vectors are pointing in the direction of motion rather than towards the previous frame. Another example, if the motion vector values are in UV space rather than pixel space.

To allow this data to be used directly, DLSS provides motion vector scale parameters used during evaluation to enable some modification of the motion vector values when passed to DLSS. They are generally set from the eval parameters struct `NVSDK NGX D3D11 DLSS Eval Params` via `InMVScaleX` and `InMVScaleY` members. These should be set to 1.0 if motion vectors do not need to be scaled and should never be 0.0f. (see section 5.4 or *nvsdk\_ngx\_helpers.h*).


### 3.6.4 Conservative raster on Motion Vector for thin features

If you are rendering objects that have thin geometric features they tend to get in and out of view due to the low resolution of the input buffers and the rasterizer "missing out" on some of that geometry. This results in visible holes when that object is rendered.

DLSS can sometimes help reconstruct some of that missing geometry but in order to do that it needs accurate motion vectors. Because those features went out of view, neither the color nor the motion vector for that missing feature is present in the input that is sent to DLSS. In that scenario shown below, DLSS will incorrectly associate the previously drawn image of that object with the motion vector of the background. In that scenario, instead of trying to mend the holes in the object drawing, those holes will persist.

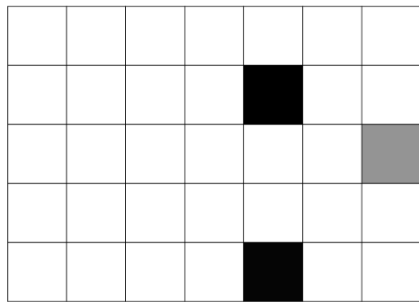


Frame 0

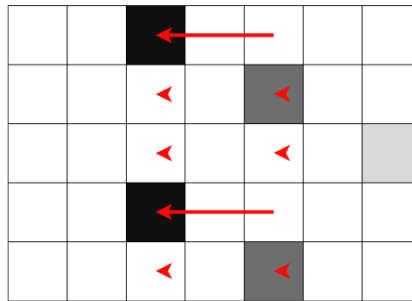


Frame 1

A potential workaround for that specific problem is to draw the motion vector (only!) for that object using the feature called Conservative raster (e.g., introduced in Direct3D 11.3 and Direct3D 12). The Conservative rasterization ensures that if a primitive touches a pixel, even by the slightest amount, it gets drawn. So, if the color information does not pick up that the object was present, the motion vector drawn with conservative raster will pick up that information.

As a result of using this, the motion of the previously drawn parts of the object will show the correct amount that the object moved on the screen, and it should allow DLSS to have a better chance at reconstructing.

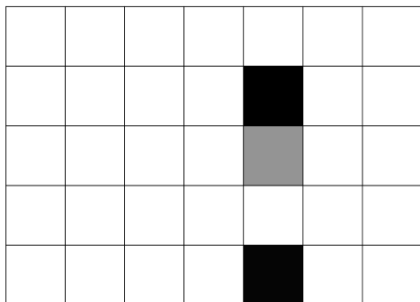

Frame 0

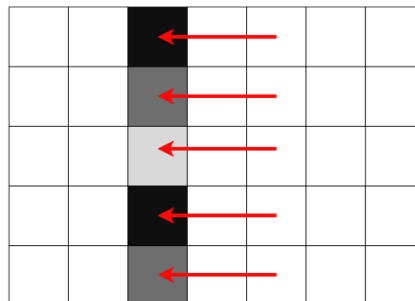

Frame 1

Here's an in-game comparison. In this we can see that the left is using conservative raster for its motion vector and as a result has slightly less visible holes during reconstruction than the right image where we didn't make use of conservative raster.



Please note that this is not necessarily the panacea in fixing those flickering objects as DLSS will use many hints from the input data to better reconstruct the image and sometimes it may think, incorrectly, that it's best to drop that reprojected history.

## 3.7 Sub-Pixel Jitter

DLSS includes several temporal components in its anti-aliasing, feature enhancement and upscaling algorithm. To achieve high image quality, DLSS emulates a higher sample rate by having the rendering engine generate a subset of the desired sample locations each frame and temporally integrating them to produce the final image. The renderer provides the additional samples by applying sub-pixel jitter to the viewport or main camera view so to vary the rasterized frame over time.

Put another way, if we had four or more frames of rendered and rasterized pixels with no motion, the image DLSS produces should be identical to a 4x super-sampled image. This is the goal for DLSS but is not always achievable in practice.

This section describes:

1. How to choose what sample position to use for each frame.
2. How to render using the different sample offsets.
3. How to send the jitter information to DLSS.

### 3.7.1 Jitter Sample Patterns

There are many different patterns that can be used to apply jitter to a 3D scene. For best results, the jitter pattern must have good coverage across the entire pixel. NVIDIA found that using a Halton sequence ([https://en.wikipedia.org/wiki/Halton\\_sequence](https://en.wikipedia.org/wiki/Halton_sequence)) for the jitter pattern provided the best results. As such, the deep learning training undertaken for DLSS uses Halton for the training data.

If possible, use a Halton sequence for sub-pixel jitter when DLSS is enabled even if a different pattern is used when TAA or an alternate AA mode is enabled. If other patterns are used, DLSS should still function

correctly (provided the rest of the jitter requirements in this section are followed) but NVIDIA has not tested other patterns.

### 3.7.1.1 Pattern Phases

In addition to the type of sequence, it is important to cycle through the pattern effectively so that, over time, there is good coverage of the entire pixel area.

A good choice for the number of phases (i.e. the number of unique samples in the pattern before repeating) is:

$$\text{Total Phases} = \text{Base Phase Count} * (\text{Target Resolution} / \text{Render Resolution}) ^ 2$$

The Base Phase Count is the number of phases often used for regular temporal anti-aliasing (like TXAA or TAA). A good starting value for the Base is “8” which provides good pixel coverage when no scaling is applied. For DLSS, the Base is then scaled by the scaling ratio of the pixel area.

For instance, with a render target of 1080p and a target output of 2160p (aka 4k), the 1080p pixel is four times the size of a 4K pixel. Hence, four times as many phases are required to make sure each 4K pixel is still covered by 8 samples. So, in this example, the total number of phases would be 32:

$$\text{Total Phases} = 8 * (2160 / 1080) ^ 2$$

DLSS Mode	Ultra Performance	Performance	Balanced	Quality	DLAA
Scaling Ratio	3.0	2.0	1.724	1.5	1.0
Minimum Phase Count	72	32	24	18	8

### 3.7.2 Rendering with Jitter Offsets

Depending on the rendering engine used, how to actually generate a jittered frame may vary. If the renderer already includes TAA or TXAA, examine how jitter is applied when that is in use and do the same thing when DLSS is enabled.

Speaking in general terms, to render with jitter, apply human imperceptible movement to the camera or viewport such that when the 3D scene is rasterized there are slight changes to the resulting frame (especially edges). A typical procedure for applying the jitter offset is to modify the renderer’s projection matrix:

```
// Each frame, update the ProjectionJitter values with those from the jitter sequence
// for the current Phase. Then offset the main projection matrix for the frame.
ProjectionMatrix.M[2][0] += ProjectionJitter.X;
ProjectionMatrix.M[2][1] += ProjectionJitter.Y;
```

Using this method should provide a shift in the camera-space coordinates rather than shifting the world-space coordinates and then projecting.

### 3.7.3 Required Jitter Information


To correctly integrate the current frame with those from the past, DLSS must know how the jitter for this frame was applied. At each call to DLSS evaluate, set the current frame's jitter amount as the jitter offsets in the parameter list (using the correct type structure for the graphics API that is in use):

```
typedef struct NVSDK_NGX_D3D11_DLSS_Eval_Params
{
    NVSDK_NGX_D3D11_Feature_Eval_Params Feature;
    /* Jitter Offsets in pixel space */
    float          InJitterOffsetX;
    float          InJitterOffsetY;
}
```

The jitter offset values:

1. Should always be between -0.5 and +0.5 (as jitter should always result in movement that is **within** a source pixel).
2. Are provided in pixel-space at the render target size (not the output or target size – jitter **cannot** be provided at output resolution as is optionally possible with motion vectors).
3. Represent the jitter applied to the projection matrix for viewport jitter irrespective of whether the offsets were also applied to the motion vectors or not.
  - a. If the motion vectors do have jitter applied to them, be sure to set the appropriate flag during the DLSS Create call as detailed in section 3.6.2.
4. Use the same co-ordinate and direction system as motion vectors (see 3.6.1 above) with “InJitterOffsetX == 0” and “InJitterOffsetY == 0” meaning no jitter was applied.



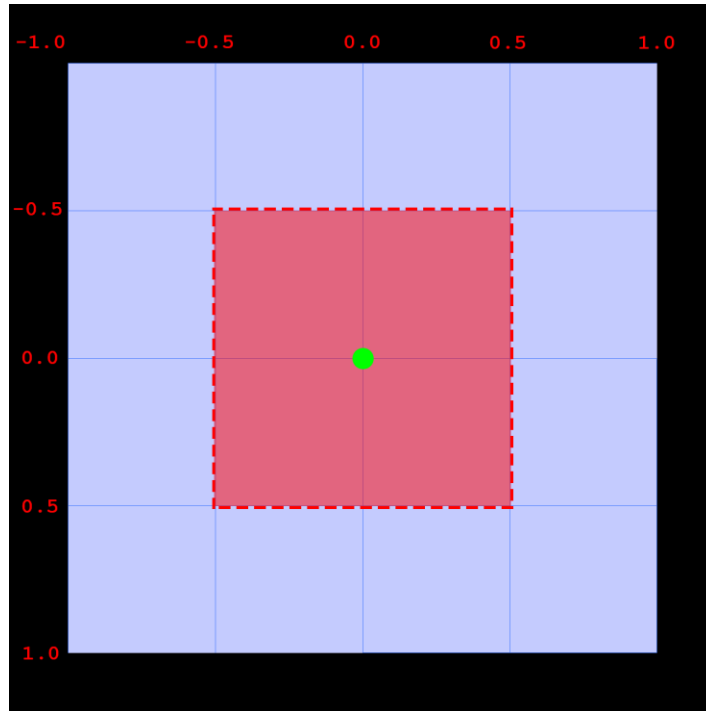

*Jitter offset scale diagram. Shaded red area is one full pixel. The green marking is the origin with red outline the range of expected values.*

### 3.7.4 Troubleshooting Jitter Issues

If there are issues such as screen shaking, distant objects not resolving, a “screen door” appearance on the output, or static objects (especially thin objects and fine texture detail) appearing “fuzzy”, there may be an issue with:

1. How jitter is applied in the renderer.
2. The supplied motion vectors.
3. The jitter offset values sent to DLSS.

To assist in debugging, NVIDIA has added several tools and visualizers to the SDK version of the DLSS library. For information on how to use these tools and debug issues with jitter, see section 8.3.

## 3.8 Depth Buffer

To assist in better object tracking and pixel alignment, DLSS uses the depth buffer generated by the engine during rasterization. The algorithm assumes that the near plane is 0.0 and the far plane is 1.0 (but this can be inverted, see below).

We recommend using nearest upsampling of gbuffer data for post processing shaders that require it.

### 3.8.1 Depth Buffer Flags

To ease integration into a wider variety of engines, DLSS accepts different depth configurations. Depending on the renderer, set the flags appropriately during DLSS Feature Creation (see section 5.3).

1. `NVSDK NGX DLSS Feature Flags DepthInverted`: set this flag to “1” if the engine uses depth with a near plane at 1.0 and far plane at 0.0.

## 3.9 Exposure Parameter

When processing in HDR, DLSS needs the renderer’s exposure value for the current frame. This is the value which when multiplied to the input color values brings middle gray to an expected level. This is typically the same value provided to the renderer’s tonemapper to consistently deal with the compression of HDR to LDR colors (e.g. when outputting to a standard LDR monitor).

**NOTE:** A basic exposure value may be calculated via the following function (where `MidGray` is the amount of reflected light which represents the perceptual middle between full reflected brightness and full absorption - a value of “0.18” is typical for `MidGray`; and `AverageLuma` is the average luminance for the entire frame):

```
ExposureValue = MidGray / (AverageLuma * (1.0 - MidGray))
```

The renderer must provide DLSS with the correct `ExposureValue` during each DLSS evaluate call using a 1x1 texture referenced in the `pInExposureTexture` parameter. Only the first channel is sampled in the texture so multiple formats will work but something such as `R16F` is preferred.

**NOTE:** This value is sent to DLSS as a 1x1 texture to avoid a round-trip to the CPU as the value is typically calculated per-frame on the GPU.

If `ExposureValue` is missing or DLSS does not receive a correct value (which can vary based on eye adaptation in some game engines), DLSS may produce a poor reconstruction of the high-resolution frame with artifacts such as:

1. Ghosting of moving objects.
2. Blurriness, banding, or pixilation of the final frame or it being too dark or too bright.
3. Aliasing especially of moving objects.
4. Exposure lag.


If one or the above issues are present even when `ExposureValue` is provided, a scale factor and/or bias may be required.

### 3.9.1 Diagnosing bad exposure with the visualizer


With the recent SDK we added a visual aide to help diagnose exposure scale problems.

You can display that pattern in the top right corner by cycling through the debug visualizers (see section 8.2).


If the exposure scale value (and pre-exposure) that is being passed to DLSS is accurate you should be able to see the pattern as below. The pattern is centered around a brightness value of 187 (on a scale of 0 and 255 in sRGB 8 bit space).

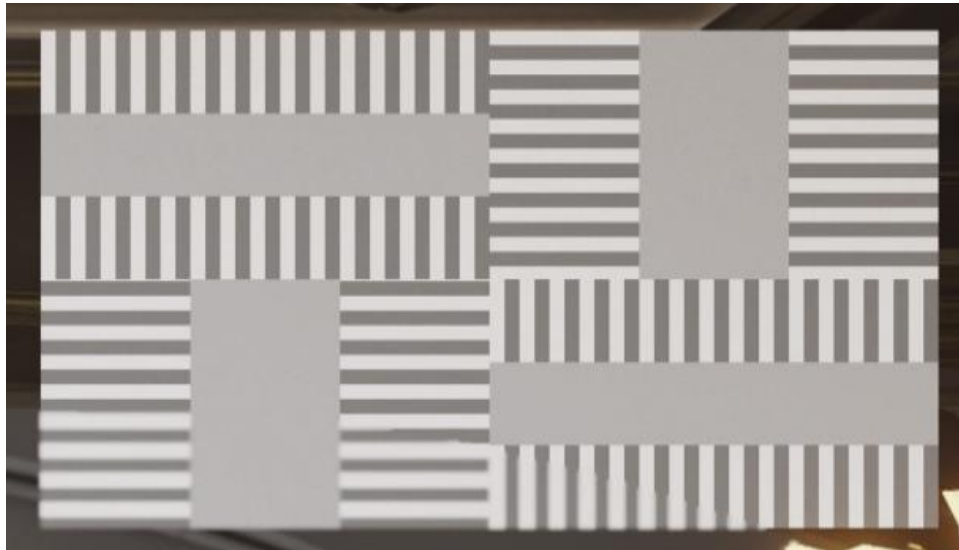

If on the other hand the value that you are passing through the exposure scale texture is undervalued, leading DLSS to see a vastly underexposed image, you should see this pattern below, where everything is very bright:

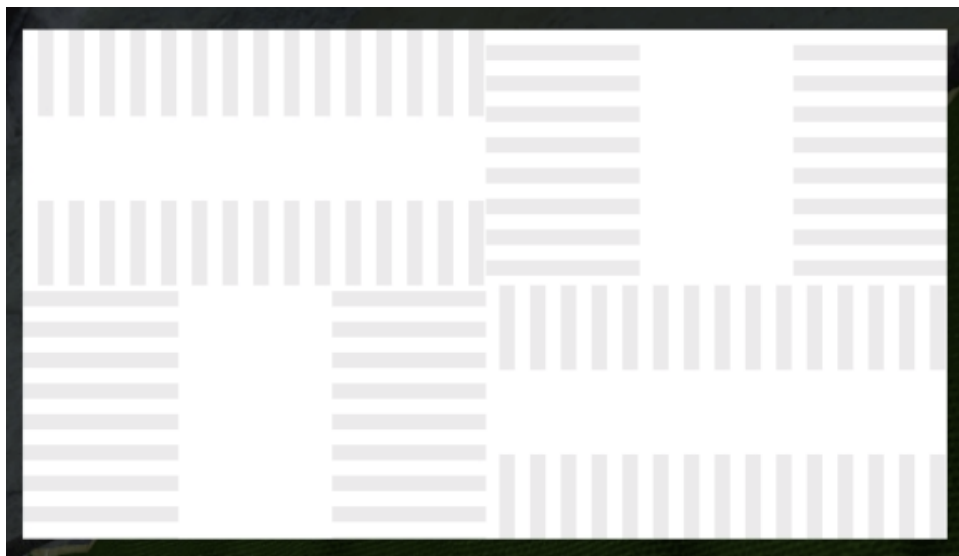

And on the opposite side, if you are passing a value through the exposure scale that is overestimated, that will lead DLSS to see an overexposed image which again will be visible with this pattern below, where everything is very dark:

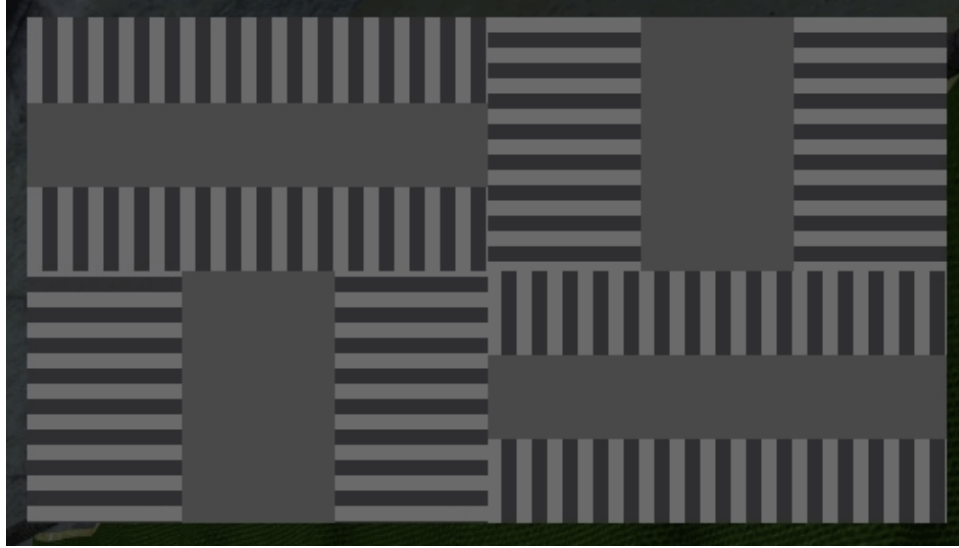

### 3.9.2 Pre-Exposure Factor

Some engines implement additional exposure tuning by pre-multiplying frames with a “pre-exposure factor” that is later removed (divided out) during tonemapping. Due to the DLSS algorithm’s heavy use of previous frame history, if this factor is not accounted for, it can lead to poor reconstruction of the high-resolution frame as the inputs are, in effect, “double-exposed”. Visual artifacts are the same as those seen if a bad `pInExposureTexture` texture is used (see section 3.9).

Please note that this is not a common use-case and developers are encouraged to confirm visual artifacts are not being caused by issues such as incorrect sub-pixel jitter or bad motion vectors. Please check them first and check with a core rendering engine lead as to whether a pre-exposure value is used or whether the input buffer passed to DLSS is already “eye adapted”.

If there is a pre-exposure value, you must pass it to DLSS during every DLSS evaluation call using the `InPreExposure` parameter (available from DLSS v2.1.0).

**NOTE:** The pre-exposure value is optional and is sent to DLSS is a CPU-side float passed via the parameter maps. It is not a texture like the main exposure value.

## 3.10 Auto-exposure

Using the main exposure parameter (see above) is the preferred method, however in some situations, taking advantage of the optional auto-exposure feature in the DLSS library can provide improved results. To use the auto-exposure values computed inside the DLSS library instead of `pInExposureTexture`, the developer must:

1. Set the `NVSDK_NGX_DLSS_Feature_Flags_AutoExposure` parameter during DLSS Feature Creation

**NOTE:** Depending on the version of the DLSS algorithm, GPU and output resolution, there may be a small increase in processing time (~0.02ms) when auto-exposure is enabled.

Auto-exposure may be toggled using the DLSS SDK DLL by pressing the CTRL+ALT+Y hotkey while in the game (overriding the flag passed at creation time).

## 3.11 Additional Sharpening

The deep learning model used in DLSS is trained to produce sharp images, however, for those developers wishing to provide a sharper image, the NVIDIA Image Scaling SDK is now publicly available as part of the DLSS SDK and in the [NVIDIA Image Scaling repository](#) in Github. It is highly recommended that developers who use the sharpening filter provide an end-user slider to control the sharpening value. (Please refer to the [Image Scaling documentation](#) for more information)

**NOTE:** The sharpening and softening pass provided in previous versions of the SDK are now deprecated. All developers are encouraged to use the Image Scaling SDK via the DLSS SDK or directly on GitHub.

## 3.12 DLSS Presets

While default settings will still result in top-of-the-line quality, those in search of peak image quality for their application can take advantage of varying DLSS presets. Presets tweak different aspects of DLSS in order to cater to different scaling ratios, game content, etc. DLSS presets are enabled on a per-scaling ratio basis. For example, to enable preset A for performance mode:

```
auto preset = NVSDK_NGX_DLSS_Hint_Render_Preset::NVSDK_NGX_DLSS_Hint_Render_Preset_A;
NVSDK_NGX_Parameter_SetUI(ngxParams, NVSDK_NGX_Parameter_DLSS_Hint_Render_Preset_Performance,
preset);
```

The following are the Presets that can be set per Performance mode using the NVSDK\_NGX\_Parameter\_SetUI API :

```
// These can be set via NVSDK_NGX_Parameter_SetUI and take values (and including) 0 - 4
typedef enum NVSDK_NGX_DLSS_Hint_Render_Preset
{
    NVSDK_NGX_DLSS_Hint_Render_Preset_Default, // default behavior, weights may or may not be
updated after OTA
    NVSDK_NGX_DLSS_Hint_Render_Preset_A,
    NVSDK_NGX_DLSS_Hint_Render_Preset_B,
    NVSDK_NGX_DLSS_Hint_Render_Preset_C,
    NVSDK_NGX_DLSS_Hint_Render_Preset_D,
    NVSDK_NGX_DLSS_Hint_Render_Preset_E,
    NVSDK_NGX_DLSS_Hint_Render_Preset_F,
    NVSDK_NGX_DLSS_Hint_Render_Preset_G,
} NVSDK_NGX_DLSS_Hint_Render_Preset;

#define NVSDK_NGX_Parameter_DLSS_Hint_Render_Preset_DLAA "DLSS.Hint.Render.Preset.DLAA"
#define NVSDK_NGX_Parameter_DLSS_Hint_Render_Preset_Quality "DLSS.Hint.Render.Preset.Quality"
#define NVSDK_NGX_Parameter_DLSS_Hint_Render_Preset_Balanced
"DLSS.Hint.Render.Preset.Balanced"
#define NVSDK_NGX_Parameter_DLSS_Hint_Render_Preset_Performance
"DLSS.Hint.Render.Preset.Performance"
```

```
#define NVSDK NGX_Parameter_DLSS_Hint_Render_Preset_UltraPerformance
"DLSS.Hint.Render.Preset.UltraPerformance"
```

DLSS defaults and presets are subject to change with new versions of DLSS. Note that `NVSDK NGX_DLSS_Hint_Render_Preset_DLAA` will work only when the input and output render sizes are set to the same value as described above.

Again, presets are subject to change with each revision but the following serves as a general guide for experimentations with the current presets:

- Preset A (intended for Perf/Balanced/Quality modes):
  - An older variant best suited to combat ghosting for elements with missing inputs (such as motion vectors)
- Preset B (intended for Ultra Perf mode):
  - Similar to Preset A but for Ultra Performance mode
- Preset C (intended for Perf/Balanced/Quality modes):
  - Preset which generally favors current frame information. Generally well-suited for fast-paced game content
- Preset D (intended for Perf/Balanced/Quality modes):
  - Similar to Preset E. Preset E is generally recommended over Preset D.
- Preset E (intended for Perf/Balanced/Quality modes)
  - The default preset for Perf/Balanced/Quality mode. Generally, favors image stability
- Preset F (intended for Ultra Perf/DLAA modes):
  - The default preset for Ultra Perf and DLAA modes.
- Preset G (Unused)

### 3.12.1 Preset Selection Behavior with OTA updates

This section describes how OTA updates discussed in (section 2.4) affect Application preset selection

- Titles that opt-in for OTA updates, and have selected a specific model, will keep that model going forward.
- In the case that the update offers a different underlying default preset than the one originally integrated - Titles that opt-in for OTA updates, and are using the default model, may have the default model changed on them as part of the OTA update.

## 3.13 Scene Transitions

DLSS is built around spatio-temporal reconstruction techniques and leverages temporal information gathered from previous frames. The algorithm can be confused if there is a complete (or significant) change in the scene from frame to frame. This can result in visual artifacts such as lagged transitions or “ghost images” from the previous scene carrying over to the new scene.

To avoid these artifacts, during the DLSS Evaluation call for the first frame after a major transition, set the `InReset` parameter from the `DLSS_Eval` parameter list to a non-zero value. This instructs DLSS to void its internal temporal component and restart its processing with the incoming inputs.

**NOTE:** Improper use of this can result in temporal flickering, heavy aliasing or other visual artifacts.

## 3.14 VRAM Usage

Modern rendering engines often track VRAM usage and modify rendering parameters and art assets based on occupancy. To assist with this tracking, DLSS offers a `NVSDK NGX_DLSS_GetStatsCallback()` function which can be used to query the amount of VRAM currently allocated internally by DLSS. Most convenient way of using the function is by using `NGX_DLSS_GET_STATS()` inline helper.

**Note** that the amount of memory that the function returns is a global variable. Therefore, if you created multiple DLSS instances, the function returns TOTAL amount of memory currently used by all instances. It also includes any memory that DLSS may cache internally. Therefore, even if you released all DLSS instances, you may still see non-zero value of allocated memory. All cached memory gets released when `Shutdown()` is called though.

**Also Note** that, by default, when you call `ReleaseFeature()`, the memory used by the feature isn't released – it's being cached internally for such case when you will immediately re-create feature again – this memory would then be reused. However, DLSS supports a hint `NVSDK NGX_Parameter_FreeMemOnReleaseFeature` which will force memory release on each `ReleaseFeature()` call. This hint can be set as follows:

```
NVSDK NGX_Parameter_SetI(ngxParams, NVSDK NGX_Parameter_FreeMemOnReleaseFeature, 1).
```

## 3.15 Biasing the Current Frame

NVIDIA is continuing to research methods to improve feature tracking in DLSS. From time to time, the DLSS feature tracking quality can be reduced and DLSS may then “erase” a particular feature or can produce a “ghost” or trail behind a moving feature. This can occur on:

1. Small particles (like snow or dust particles).
2. Objects that display an animated/scrolling texture.
3. Very thin objects (such as power lines).
4. Objects with missing motion vectors (many particle effects).
5. Disoccluding objects with motion vectors that have very large values (such as a road surface disoccluding from under a fast-moving car).

If a problematic asset is discovered during testing, one option is to instruct DLSS to bias the incoming color buffer over the colors from previous frames. To do so, create a 2D binary mask that flags the non-occluded pixels that represent the problematic asset and send it to the DLSS evaluate call as the `BiasCurrentColor` parameter. The DLSS model then uses an alternate technique for pixels flagged by the mask.

The mask itself should be the same resolution as the color buffer input, use `R8G8B8A8_UNORM /R16_FLOAT/R8_UNORM` format (or any format with an R component) and have a value of “1.0” for masked pixels with all other pixels set to “0.0”.

**NOTE:** Only use this mask on problematic assets after the DLSS integration has been completed and confirmed as fully functional. There may be increased aliasing within the mask borders.

## 3.16 Alpha Upscaling Support

By default, DLSS is intended for 3-channel RGB images, only. Experimental support for upscaling 4-channel RGBA images can be enabled by setting the `NVSDK_NGX_DLSS_Feature_Flags_AlphaUpscaling` flag at creation time. For best results, the RGB color should be premultiplied by alpha in the color input.

Note: performance will be impacted by enabling this feature. Expect the overall execution time of DLSS to increase by 15-25% when alpha blending is enabled.

## 3.17 Multi-view and Virtual Reality Support

DLSS natively supports multiple views, including virtual reality (VR) by creating multiple DLSS instances with one associated to each view (which, in the case of VR, will likely correspond to each eye).

To use DLSS with multiple views, create multiple DLSS instances with the standard call to `NGX_<API>_CREATE_DLSS_EXT`) and have the DLSS evaluation calls be made on the DLSS instance handle associated with the view currently being upsampled.

Many VR titles render both eyes to the same render target. In that case, use sub-rectangles to restrict DLSS to the appropriate region of interest in the render target (see section 5.4 for details). The sub-rectangle parameters specify:

1. The “base” (top-left corner) of the sub-rectangle.
2. The size of the sub-rectangles assumed to be the input/output dimensions specified at instance handle creation time or the input dimensions specified at evaluation time, in the case of the *input sub-rectangles*, if dynamic resolution is being used (see section 3.2.2 for details).
3. The size of the *output sub-rectangle* is assumed to be the output dimensions specified at instance handle creation time regardless of whether dynamic resolution is in use.

**NOTE:** To use sub-rectangles to specify a subregion of the *output resource* for DLSS to output to, the flag `InEnableOutputSubrects` in `NVSDK_NGX_DLSS_Create_Params` must be set to `true` at DLSS instance handle creation time (see section 5.3 for details). Sub-rectangles are supported on the *input resources* regardless of whether `InEnableOutputSubrects` is set.


## 3.18 Current DLSS Settings

The DLSS library included as part of the DLSS SDK includes a permanent watermark (outlined in red below) and an optional on-screen display of certain information about the current DLSS parameters and settings (outlined in green below). These are provided for debugging purposes; the watermark is **not** included in the production library.

**NOTE:** End-user machines do not show the DLSS parameters and debug lines but some DLSS information like the version number does appear with a production DLSS library if the



developer's or tester's machine has the appropriate registry key set (see next paragraph). This is not a bug.

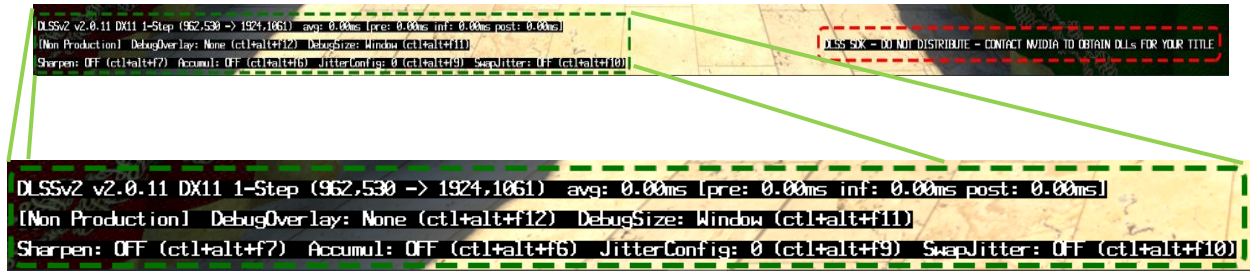

To enable the DLSS debug information lines (outlined in green above), locate the registry file “dlss\_debug\_onscreendisplay\_on.reg” that was in the SDK archive or is in the “Utils” folder on the GitHub repository. From Windows Explorer, double-click the file and merge the changes to the Windows Registry. To disable the debug lines, follow the same procedure with the “dlss\_debug\_onscreendisplay\_off.reg” file.

For develop and debug builds, registry key that enables DLSS on-screen indicator is:

HKEY\_LOCAL\_MACHINE\SOFTWARE\NVIDIA Corporation\Global\NGXCore\ShowDlssIndicator

It must be DWORD. Any positive value enables DLSS indicator for Develop and Debug builds of DLSS. On the contrary, Release build of DLSS requires value **1024** to enable DLSS indicator.

For Linux, set environment variable `__NGX_SHOW_INDICATOR=1`.

### 3.18.1 DLSS Information Lines & Debug Hotkeys

From left to right and top to bottom, the DLSS debugging information displays:

1. The DLSS version (in this example v2.0.11).
2. Current 3D API in use (DirectX 11, DirectX 12 or Vulkan).
3. Render to target scaling factor. The first number is the input buffer size (i.e. the current render target size); the second number is the output buffer size (i.e. the display resolution).
4. The remainder of the line shows timing information (depending on the driver in use and setup of the system, timing may display zero or estimates of execution time).
5. The debugging hotkeys begin on the second line and continue onto the third:
  - 5.1. The current debug overlay name is output first. To cycle through the available debug overlays, use CTRL+ALT+F12. For a list of debug overlays and how to use them, see section 8.2.
  - 5.2. To toggle between the debug overlay displayed as a window in the top right of the screen and a fullscreen display, use CTRL+ALT+F11.
  - 5.3. To toggle the debug “Accumulation Mode”, use CTRL+ALT+F6. For more information on how to use the Accumulation Mode, see section 8.3.

- 5.4. To toggle NaN visualization, use CTRL+ALT+O. NaNs will be displayed as bright red. To debug NaNs in the input, cycle through the debug overlays as described above.
- 5.5. To cycle negation of the different jitter offsets, use CTRL+ALT+F10. For more information on debugging jitter, see section 8.4 and for a full list of the different combinations, see 3.18.1.1 below.
- 5.6. To exchange the X and Y jitter offsets (i.e. have DLSS use the incoming X offset as the Y offset and vice versa), use CTRL+ALT+F10. For more information on debugging jitter, see section 8.4.

### 3.18.1.1 Jitter Offset Configurations

To assist in debugging issues with sub-pixel jitter, the DLSS SDK library can optionally adjust the jitter offset components using the CTRL+ALT+F9 hotkey. These are the configurations:

```
// By default, jitter offsets are used as sent from the engine
Config 0: OFF

// Combinations halving and negating both vector components
Config 1:
    JitterOffsetX *= 0.5f;
    JitterOffsetY *= 0.5f;
Config 2:
    JitterOffsetX *= 0.5f;
    JitterOffsetY *= -0.5f;
Config 3:
    JitterOffsetX *= -0.5f;
    JitterOffsetY *= 0.5f;
Config 4:
    JitterOffsetX *= -0.5f;
    JitterOffsetY *= -0.5f;

// Combinations doubling and negating both vector components
Config 5:
    JitterOffsetX *= 2.0f;
    JitterOffsetY *= 2.0f;
Config 6:
    JitterOffsetX *= 2.0f;
    JitterOffsetY *= -2.0f;
Config 7:
    JitterOffsetX *= -2.0f;
    JitterOffsetY *= 2.0f;
Config 8:
    JitterOffsetX *= -2.0f;
    JitterOffsetY *= -2.0f;

// Combinations negating one or both vector components
Config 9:
    JitterOffsetX *= 1.0f;
    JitterOffsetY *= -1.0f;
Config 10:
    JitterOffsetX *= -1.0f;
    JitterOffsetY *= 1.0f;
Config 11:
    JitterOffsetX *= -1.0f;
    JitterOffsetY *= -1.0f;

// Combinations halving and negating individual vector components
Config 12:
```

```

    JitterOffsetX *= 0.5f;
Config 13:
    JitterOffsetY *= 0.5f;
Config 14:
    JitterOffsetX *= -0.5f;
Config 15:
    JitterOffsetY *= -0.5f;

// Combinations doubling and negating individual vector components
Config 16:
    JitterOffsetX *= 2.0f;
Config 17:
    JitterOffsetY *= 2.0f;
Config 18:
    JitterOffsetX *= -2.0f;
Config 19:
    JitterOffsetY *= -2.0f;

```

## 3.19 NGX Logging

If the DLSS on-screen debugging information does not provide adequate detail, there are more verbose logs generated by NGX. These logs are saved to files in the path included during NGX initialization and can also be displayed to a separate console window if desired.

The latest DLSS debugging registry keys are available in the “utils” directory.

1. The “ngx\_log\_on.reg” file enables the NGX logging system (meaning log files are generated).
2. The “ngx\_log\_off.reg” file disables the NGX logging system (meaning no log files are generated).
3. The “ngx\_log\_verbose.reg” enables the verbose level of NGX logging.
4. The “ngx\_log\_window\_on.reg” enables the display of a separate on-screen console window showing the logs in real-time.
  - a. Certain fullscreen games and applications can exhibit unexpected behavior when the NGX logging window is used. If that occurs, try running the game in Windowed mode or disable the NGX logging window by running “ngx\_log\_window\_off.reg”.
5. The “ngx\_log\_window\_off.reg” disables the separate on-screen console window.

**IMPORTANT:** NGX or DLSS may silently fail to load or initialize if the path provided to NGX for logging is not writeable. The developer must ensure they provide a valid path if logging is enabled. Creating a directory in “%USERPROFILE%\AppData\Local\” and using that for logging is a common option.

In addition, the app may also directly raise the logging level used by NGX, and have the NGX log line piped back to the app via a callback, among other logging-related settings that the app may set. These features may be used by the app by setting additional parameters in the NVSDK\_NGX\_FeatureCommonInfo struct that the app may pass in when initializing NGX. Please see section 5.2 below for more details.

For Linux, set environment variable `__NGX_LOG_LEVEL=1`.

## 3.20 Sample Code

The latest sample app is found on the DLSS Developer Zone Page and is bundled as a self-contained ZIP included with each release of the DLSS SDK:

- <https://developer.nvidia.com/dlss-getting-started>

Instructions to compile and build are found in `.../DLSS_Sample_App/README.md`.

The sample app is written using the NVIDIA “Donut” framework. The application code is in `.../DLSS_Sample_App/ngx_dlss_demo`. The `“NGXWrapper.cpp”` file contains the NGX calls, which are invoked from `“DemoMain.cpp”`.

## 3.21 Integrating DLSS using Streamline SDK

DLSS can be integrated into any application through the Streamline SDK. You will need the following:

- Streamline SDK
- DLSS Plugin for Streamline – `sl.dlss.dll` available in the Streamline SDK
- DLSS Binary – a compatible `nvngx_dlss.dll` which can be used by `sl.dlss.dll`

The DLSS Plugin for Streamline (`sl.dlss.dll`) serves as a wrapper for `nvngx_dlss.dll`. For more details on how to integrate DLSS into applications using the Streamline SDK, please refer to the programming guide shipped as a part of that SDK:

<https://github.com/NVIDIAGameWorks/Streamline>

# 4 Distributing DLSS in a Game

NVIDIA has encapsulated the DLSS technology to ensure developers can use the functionality with minimal build or packaging changes. Follow the steps in this section to include DLSS in game or application builds.

## 4.1 DLSS Release Process

NVIDIA hosted DLSS publicly for all development partners. To ensure the best quality experience for end-users, we encourage developers to thoroughly test DLSS on different DLSS modes, output resolutions and varying game content.

## 4.2 Distributable Libraries

The release library for DLSS is located in the `“./lib/<plat>_<arch>/rel/”` folder of the GitHub repository. Ensure that after game installation, the file resides in the same folder as the game executable (or DLL if you are building a plugin).

**IMPORTANT:** The development DLL is located in “./lib/<plat>\_<arch>/dev/” and **MUST NOT be included or distributed in any public release.** This library includes on-screen notices and has an overlay designed for debugging only (see section 8.2).

NGX AI Powered Feature	NGX Feature DLL
DLSS	nvngx_dlss.dll / libnvidia-ngx-dlss.so

**Note:** The DLSS library can be loaded from an alternate directory path if required. The entry point, `NVSDK_NGX_D3D12_Init_ext`, accepts a parameter, `InFeatureInfo` which has a `NVSDK_NGX_PathListInfo` item which contains a list of paths to search through. For more information, see sections 5.1 and 5.2 below.

### 4.2.1 Removing the DLSS Library

The installer for the game or application should treat the DLSS library in the same way as other components and remove the library when uninstalling.

### 4.2.2 Signing the DLSS Library

The DLSS DLL is cryptographically signed and securely loaded by the NVIDIA driver (NGX Core). If the game or application DLLs are signed during the build or packaging process, the signature must be appended to the existing NVIDIA signature (do NOT strip the NVIDIA signature).

**IMPORTANT:** If the NVIDIA signature is missing or corrupted on the DLSS DLL, NGX Core is not able to load the library and DLSS functionality will fail.

### 4.2.3 Notice of inclusion of third-party code

The DLSS DLL that will be part of the game or application package includes third party code that needs to be acknowledged in the public documentation of the final product (the game or application).

Please include the full text of copyright and license blurbs that are found in section 9.5.

## 5 DLSS Code Integration

### 5.1 Adding DLSS to a Project

The NGX DLSS SDK includes four header files:

- `nvsdk_ngx.h`
- `nvsdk_ngx_defs.h`
- `nvsdk_ngx_params.h`
- `nvsdk_ngx_helpers.h`

The header files are located in the “./include” folder. In the game project, include `nvsdk_ngx_helpers.h`.

**NOTE:** Vulkan headers follow the above naming convention with a “\_vk” suffix and must be included with Vulkan applications.

During development, copy the `nvngx_dlss.dll / libnvidia-ngx-dlss.so` from the “./lib/<plat>\_<arch>/dev/” directory on GitHub to the folder where the main game executable or DLL is located so the NGX runtime can properly find and load the DLL. If required by the game or the game build or packaging system, the DLSS library can be packaged in a different location to the main executable. In such case, the entry point, `NVSDK_NGX_D3D12_Init_ext`, accepts a parameter, `InFeatureInfo` which has a `NVSDK_NGX_PathListInfo` item which contains a list of paths to search through. For more information, see section 5.1.

### 5.1.1 Linking the NGX SDK on Windows

In addition to including the NGX header files, the project must also link against:

1. `nvsdk_ngx_s.lib` (if the project uses static runtime library (**/MT**) linking),  
**or**
2. `nvsdk_ngx_d.lib` (if the project uses dynamic runtime library (**/MD**) linking).

Both files are located in the “./lib/<plat>\_<arch>” folder.

### 5.1.2 Linking the NGX SDK on Linux

In addition to including the NGX header files, the project must also link against:

`libsdk_nvngx.a`

**and**

`libstdc++.so`

**and**

`libdl.so`

## 5.2 Initializing NGX SDK Object

DLSS is a feature of NGX which is shipped as part of the NVIDIA display driver. The NGX SDK uses a similar set of calls for its supported APIs (Vulkan, D3D11, D3D12 and CUDA) so you can initialize NGX (and then DLSS) using code that matches or is very similar to the following sample code. Ensure that calls match the API used by the game or rendering engine in use. Any interoperability between APIs, for example, D3D11 to CUDA, must be handled by the game or application outside of the NGX SDK.

**Additional note for Vulkan:** The application must enable the instance and device extensions as queried by the APIs mentioned in section 2.3.1.

To initialize an NGX SDK instance, use one of the following methods:

```

typedef struct NVSDK NGX_PathListInfo
{
    wchar_t **Path;
    // Path-list length
    unsigned int Length;
} NVSDK NGX_PathListInfo;

typedef enum NVSDK NGX_Logging_Level
{
    NVSDK NGX_LOGGING_LEVEL_OFF = 0,
    NVSDK NGX_LOGGING_LEVEL_ON,
    NVSDK NGX_LOGGING_LEVEL_VERBOSE,
    NVSDK NGX_LOGGING_LEVEL_NUM
} NVSDK NGX_Logging_Level;

// A logging callback provided by the app to allow piping log lines back to the app.
// Please take careful note of the signature and calling convention.
// The callback must be able to be called from any thread.
// It must also be fully thread-safe and any number of threads may call into it concurrently.
// It must fully process message by the time it returns, and there is no guarantee that
// message will still be valid or allocated after it returns.
// message will be a null-terminated string and may contain multibyte characters.
#ifdef __GNUC__ || defined(__clang__)
typedef void NVSDK_CONV(*NVSDK NGX_AppLogCallback)(const char* message,
NVSDK NGX_Logging_Level loggingLevel, NVSDK NGX_Feature sourceComponent);
#else
typedef void(NVSDK_CONV* NVSDK NGX_AppLogCallback)(const char* message,
NVSDK NGX_Logging_Level loggingLevel, NVSDK NGX_Feature sourceComponent);
#endif

typedef struct NGSDK NGX_LoggingInfo
{
    // Fields below were introduced in SDK version 0x0000014

    // App-provided logging callback
    NVSDK NGX_AppLogCallback LoggingCallback;

    // The minimum logging level to use. If this is higher
    // than the logging level otherwise configured, this will override
    // that logging level. Otherwise, that logging level will be used.
    NVSDK NGX_Logging_Level MinimumLoggingLevel;

    // Whether or not to disable writing log lines to sinks other than the app log
    //callback.
    // This may be useful if the app provides a logging callback. LoggingCallback must be
    //non-null and point
    // to a valid logging callback if this is set to true.
    bool DisableOtherLoggingSinks;
} NGSDK NGX_LoggingInfo;

typedef struct NVSDK NGX_FeatureCommonInfo
{
    // List of all paths in descending order of search sequence to locate a feature dll
    // in, other than the default path - application folder.
    NVSDK NGX_PathListInfo PathListInfo;

    // Used internally by NGX
    // Introduced in SDK version 0x0000013
    NVSDK NGX_FeatureCommonInfo_Internal* InternalData;
}

```

```

// Fields below were introduced in SDK version 0x0000014

    NVSDK_NGX_LoggingInfo LoggingInfo;
} NVSDK_NGX_FeatureCommonInfo;

// NVSDK_NGX_Init
// -----
//
// InApplicationId:
//     Unique Id provided by NVIDIA
//
// InApplicationDataPath:
//     Folder to store logs and other temporary files (write access required)
//
// InDevice: [d3d11/12 only]
//     DirectX device to use
//
// InFeatureInfo:
//     Contains information common to all features, presently only a list of all paths
//     feature dlls can be located in, other than the default path - application directory.
//
// InSDKVersion:
//     The minimum API version required to be supported by the drivers installed on the
//     user's machine. Certain SDK features require a minimum API version to be supported
//     by the user's installed drivers. The call to the SDK initialization function
//     will fail if the drivers do not support at least API version InSDKVersion. The
//     application should pass in the appropriate InSDKVersion for its required set of
//     SDK features.
//
// DESCRIPTION:
//     Initializes new SDK instance.
//
NVSDK_NGX_Result  NVSDK_CONV NVSDK_NGX_D3D11_Init(unsigned long long InApplicationId, const
wchar_t *InApplicationDataPath, ID3D11Device *InDevice, const NVSDK_NGX_FeatureCommonInfo
*InFeatureInfo = nullptr, NVSDK_NGX_Version InSDKVersion = NVSDK_NGX_Version_API);

NVSDK_NGX_Result  NVSDK_CONV NVSDK_NGX_D3D12_Init(unsigned long long InApplicationId, const
wchar_t *InApplicationDataPath, ID3D12Device *InDevice, const NVSDK_NGX_FeatureCommonInfo
*InFeatureInfo = nullptr, NVSDK_NGX_Version InSDKVersion = NVSDK_NGX_Version_API);

#ifdef __cplusplus
NVSDK_NGX_Result  NVSDK_CONV NVSDK_NGX_VULKAN_Init(unsigned long long InApplicationId, const
wchar_t *InApplicationDataPath, VkInstance InInstance, VkPhysicalDevice InPD, VkDevice
InDevice, const NVSDK_NGX_FeatureCommonInfo *InFeatureInfo = nullptr, NVSDK_NGX_Version
InSDKVersion = NVSDK_NGX_Version_API);
#else
NVSDK_NGX_Result  NVSDK_CONV NVSDK_NGX_VULKAN_Init(unsigned long long InApplicationId, const
wchar_t *InApplicationDataPath, VkInstance InInstance, VkPhysicalDevice InPD, VkDevice
InDevice, const NVSDK_NGX_FeatureCommonInfo *InFeatureInfo, NVSDK_NGX_Version InSDKVersion);
#endif

// NGX return-code conversion-to-string utility only as a debug/logging aide - not for
official use.
const wchar_t* NVSDK_CONV GetNGXResultAsString(NVSDK_NGX_Result InNGXResult);

typedef enum NVSDK_NGX_EngineType
{

```



```

    CUSTOM = 0,
    UNREAL,
    UNITY,
    OMNIVERSE,
    NUM_GENERIC_ENGINES
} NVSDK_NGX_EngineType;

////////////////////////////////////////
/////
// NVSDK_NGX_Init_with_ProjectID
// -----
//
// InProjectId:
//     Unique Id provided by the rendering engine used
//
// InEngineType:
//     Rendering engine used by the application / plugin.
//     Use NVSDK_NGX_ENGINE_TYPE_CUSTOM if the specific engine type is not supported
explicitly
//
// InEngineVersion:
//     Version number of the rendering engine used by the application / plugin.
//
// InApplicationDataPath:
//     Folder to store logs and other temporary files (write access required),
//     Normally this would be a location in Documents or ProgramData.
//
// InDevice: [d3d11/12 only]
//     DirectX device to use
//
// InFeatureInfo:
//     Contains information common to all features, presently only a list of all paths
//     feature dlls can be located in, other than the default path - application directory.
//
// DESCRIPTION:
//     Initializes new SDK instance.
//
NVSDK_NGX_Result NVSDK_CONV NVSDK_NGX_D3D11_Init_with_ProjectID(const char *InProjectId,
NVSDK_NGX_EngineType InEngineType, const char *InEngineVersion, const wchar_t
*InApplicationDataPath, ID3D11Device *InDevice, const NVSDK_NGX_FeatureCommonInfo
*InFeatureInfo = nullptr, NVSDK_NGX_Version InSDKVersion = NVSDK_NGX_Version_API);

NVSDK_NGX_Result NVSDK_CONV NVSDK_NGX_D3D12_Init_with_ProjectID(const char *InProjectId,
NVSDK_NGX_EngineType InEngineType, const char *InEngineVersion, const wchar_t
*InApplicationDataPath, ID3D12Device *InDevice, const NVSDK_NGX_FeatureCommonInfo
*InFeatureInfo = nullptr, NVSDK_NGX_Version InSDKVersion = NVSDK_NGX_Version_API);

NVSDK_NGX_Result NVSDK_CONV NVSDK_NGX_CUDA_Init_with_ProjectID(const char *InProjectId,
NVSDK_NGX_EngineType InEngineType, const char *InEngineVersion, const wchar_t
*InApplicationDataPath, const NVSDK_NGX_FeatureCommonInfo *InFeatureInfo = nullptr,
NVSDK_NGX_Version InSDKVersion = NVSDK_NGX_Version_API);

NVSDK_NGX_Result NVSDK_CONV NVSDK_NGX_VULKAN_Init_with_ProjectID(const char *InProjectId,
NVSDK_NGX_EngineType InEngineType, const char *InEngineVersion, const wchar_t
*InApplicationDataPath, VkInstance InInstance, VkPhysicalDevice InPD, VkDevice InDevice, const
NVSDK_NGX_FeatureCommonInfo *InFeatureInfo = nullptr, NVSDK_NGX_Version InSDKVersion =
NVSDK_NGX_Version_API);

```

Certain SDK features may require a certain minimum driver version. The required features that the driver must support are gated by the `InSDKVersion` value passed into the SDK initialization functions for each API. Thus, if an application requires features only available in SDK API version `0x0000014` or higher, then it should pass in `0x0000014` for `InSDKVersion`. If it does not require said features, it should pass in a lower value (such as `0x0000013`, which also generally serves as a good baseline API version for most applications, since it supports most SDK features, and is also widely supported by the drivers installed on most user machines; please see the SDK headers to determine if your application uses SDK features that require a higher API version). The minimum API version required for the various SDK features is documented in the NGX SDK headers; please see the definition of `struct NVSDK_NGX_FeatureCommonInfo` as an example.

### 5.2.1 Project ID

Project ID refers to a unique ID(`InProjectId`) that is specific to certain 3<sup>rd</sup> party engines like Unreal or Omniverse. The DLSS integration for those engines should already take care of passing the value to DLSS. Make sure that the Project ID is set in the engine's editor.

Project ID is assumed to be GUID-like, for instance:

```
"a0f57b54-1daf-4934-90ae-c4035c19df04"
```

For CUSTOM engine type the driver validates that passed project ID satisfies GUID-likeness requirements. If you get error from `NVSDK_NGX*_Init_with_ProjectID()`, you can see what exact problem was by inspecting NGX log.

Use `NVSDK_NGX*_Init_with_ProjectID()` function along with a Project ID, Engine Type and Engine Version, as described in their respective sections.

**Note:** *If your NVIDIA Developer Technologies contact provides you with a NVIDIA Application ID (`InApplicationId`), please use the `NVSDK_NGX*_Init()` functions to initialize NGX and pass in the given application ID instead of Project ID.*

### 5.2.2 Engine Type

It refers to the rendering engine (`InEngineType`) used by the application.

### 5.2.3 Engine Version

Engine version (`InEngineVersion`) should be the same version that is reported by the core engine.

### 5.2.4 Thread Safety

The NGX API is **not** thread safe. The client application must ensure that thread safety is enforced as needed. Making evaluations, calls or invocations on the same NGX Feature and associated NGX parameter object from multiple threads can result in unpredictable behavior.

### 5.2.5 Contexts and Command Lists

For DLSS titles that use DirectX 11, the NGX API preserves the state of the immediate D3D11 context. This is **not** the case with D3D12 command lists or Vulkan command buffers. For applications using

DirectX 12 or Vulkan, the client application must manage the command list and command buffer state as needed.

## 5.2.6 Verifying Availability of NGX Features and Allocating Parameter Maps

Successful initialization of the NGX SDK instance indicates that the target system is capable of running NGX features. However, each feature can have additional dependencies, for example, a minimum driver version. It is therefore good practice to check if the specific feature (i.e. DLSS) is available. For this purpose, NGX provides an NVSDK\_NGX\_Parameter interface which can be used to query read-only parameters provided by the NGX runtime and obtained using the following API:

```
////////////////////////////////////
////
// NVSDK_NGX_AllocateParameters
// -----
//
// OutParameters:
//     Parameters interface used to set any parameter needed by the SDK
//
// DESCRIPTION:
//     This interface allows allocating a simple parameter setup using named fields, whose
//     lifetime the app must manage.
//     For example one can set width by calling Set(NVSDK_NGX_Parameter_Denoiser_Width,100)
//     or provide CUDA buffer pointer by calling
//     Set(NVSDK_NGX_Parameter_Denoiser_Color,cudaBuffer)
//     For more details please see sample code.
//     Parameter maps output by NVSDK_NGX_AllocateParameters must NOT be freed using
//     the free/delete operator; to free a parameter map
//     output by NVSDK_NGX_AllocateParameters, NVSDK_NGX_DestroyParameters should be used.
//     Unlike with NVSDK_NGX_GetParameters, parameter maps allocated with
//     NVSDK_NGX_AllocateParameters
//     must be destroyed by the app using NVSDK_NGX_DestroyParameters.
//     Also unlike with NVSDK_NGX_GetParameters, parameter maps output by
//     NVSDK_NGX_AllocateParameters
//     do not come pre-populated with NGX capabilities and available features.
//     To create a new parameter map pre-populated with such information,
//     NVSDK_NGX_GetCapabilityParameters
//     should be used.
//     This function may return NVSDK_NGX_Result_FAIL_OutOfDate if an older driver, which
//     does not support this API call is being used. In such a case, NVSDK_NGX_GetParameters
//     may be used as a fallback.
//     This function may only be called after a successful call into NVSDK_NGX_Init.
//
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_D3D11_AllocateParameters(NVSDK_NGX_Parameter** OutParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_D3D12_AllocateParameters(NVSDK_NGX_Parameter** OutParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_VULKAN_AllocateParameters(NVSDK_NGX_Parameter** OutParameters);

////////////////////////////////////
////
// NVSDK_NGX_GetCapabilityParameters
// -----
//
// OutParameters:
//     The parameters interface populated with NGX and feature capabilities
```

```

//
// DESCRIPTION:
//   This interface allows the app to create a new parameter map
//   pre-populated with NGX capabilities and available features.
//   The output parameter map can also be used for any purpose
//   parameter maps output by NVSDK_NGX_AllocateParameters can be used for
//   but it is not recommended to use NVSDK_NGX_GetCapabilityParameters
//   unless querying NGX capabilities and available features
//   due to the overhead associated with pre-populating the parameter map.
//   Parameter maps output by NVSDK_NGX_GetCapabilityParameters must NOT be freed using
//   the free/delete operator; to free a parameter map
//   output by NVSDK_NGX_GetCapabilityParameters, NVSDK_NGX_DestroyParameters should be
//   used.
//   Unlike with NVSDK_NGX_GetParameters, parameter maps allocated with
//   NVSDK_NGX_GetCapabilityParameters
//   must be destroyed by the app using NVSDK_NGX_DestroyParameters.
//   This function may return NVSDK_NGX_Result_FAIL_OutOfDate if an older driver, which
//   does not support this API call is being used. This function may only be called
//   after a successful call into NVSDK_NGX_Init.
//   If NVSDK_NGX_GetCapabilityParameters fails with NVSDK_NGX_Result_FAIL_OutOfDate,
//   NVSDK_NGX_GetParameters may be used as a fallback, to get a parameter map pre-
//   populated with NGX capabilities and available features.
//
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_D3D11_GetCapabilityParameters(NVSDK_NGX_Parameter** OutParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_D3D12_GetCapabilityParameters(NVSDK_NGX_Parameter** OutParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_VULKAN_GetCapabilityParameters(NVSDK_NGX_Parameter** OutParameters);

////////////////////////////////////
/////
// NVSDK_NGX_DestroyParameters
// -----
//
// InParameters:
//   The parameters interface to be destroyed
//
// DESCRIPTION:
//   This interface allows the app to destroy the parameter map passed in. Once
//   NVSDK_NGX_DestroyParameters is called on a parameter map, it
//   must not be used again.
//   NVSDK_NGX_DestroyParameters must not be called on any parameter map returned
//   by NVSDK_NGX_GetParameters; NGX will manage the lifetime of those
//   parameter maps.
//   This function may return NVSDK_NGX_Result_FAIL_OutOfDate if an older driver, which
//   does not support this API call is being used. This function may only be called
//   after a successful call into NVSDK_NGX_Init.
//
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_D3D11_DestroyParameters(NVSDK_NGX_Parameter* InParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_D3D12_DestroyParameters(NVSDK_NGX_Parameter* InParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV
NVSDK_NGX_VULKAN_DestroyParameters(NVSDK_NGX_Parameter* InParameters);

////////////////////////////////////
/////
// NVSDK_NGX_GetParameters
// -----
//

```

```

// OutParameters:
//     Parameters interface used to set any parameter needed by the SDK
//
// DESCRIPTION:
//     This interface allows simple parameter setup using named fields.
//     For example one can set width by calling Set(NVSDK_NGX_Parameter_Denoiser_Width,100)
//     or provide CUDA buffer pointer by calling
//     Set(NVSDK_NGX_Parameter_Denoiser_Color,cudaBuffer)
//     For more details please see sample code. Please note that allocated memory
//     will be freed by NGX so free/delete operator should NOT be called.
//     Parameter maps output by NVSDK_NGX_GetParameters are also pre-populated
//     with NGX capabilities and available features.
//     Unlike with NVSDK_NGX_AllocateParameters, parameter maps output by
//     NVSDK_NGX_GetParameters
//     have their lifetimes managed by NGX, and must not
//     be destroyed by the app using NVSDK_NGX_DestroyParameters.
//     NVSDK_NGX_GetParameters is deprecated and apps should move to using
//     NVSDK_NGX_AllocateParameters and NVSDK_NGX_GetCapabilityParameters when possible.
//     Nevertheless, due to the possibility that the user will be using an older driver
//     version, NVSDK_NGX_GetParameters may still be used as a fallback if
//     NVSDK_NGX_AllocateParameters
//     or NVSDK_NGX_GetCapabilityParameters return NVSDK_NGX_Result_FAIL_OutOfDate.
//
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV NVSDK_NGX_D3D11_GetParameters(NVSDK_NGX_Parameter
**OutParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV NVSDK_NGX_D3D12_GetParameters(NVSDK_NGX_Parameter
**OutParameters);
NVSDK_NGX_API NVSDK_NGX_Result NVSDK_CONV NVSDK_NGX_VULKAN_GetParameters(NVSDK_NGX_Parameter
**OutParameters);

```

The app should allocate a new parameter map pre-populated with the above-mentioned read-only parameters provided by NGX, using the NVSDK\_NGX\_GetCapabilityParameters interface. Note that if the user is using an older driver, NVSDK\_NGX\_GetCapabilityParameters may fail with NVSDK\_NGX\_Result\_FAIL\_OutOfDate. In that case, the app may fall back on using NVSDK\_NGX\_GetParameters to get a parameter map pre-populated with the above-mentioned read-only parameters. Note however, that NVSDK\_NGX\_GetParameters is deprecated, and its use as a fallback by apps is intended as a stopgap, until a new enough driver version is widely installed.

Sometimes NGX feature is denied for certain apps. It can be also queried using NVSDK\_NGX\_GetParameters with enum: NVSDK\_NGX\_Parameter\_SuperSampling\_FeatureInitResult.

**NOTE:** NVSDK\_NGX\_Parameter objects output by NVSDK\_NGX\_GetParameters are automatically released by NGX during the shutdown call. However, parameter objects output by NVSDK\_NGX\_GetCapabilityParameters must be destroyed by the app using NVSDK\_NGX\_DestroyParameters.

For example, to check if DLSS is available on the user's system when running in Vulkan, use the following:

```

int DLSS_Supported = 0;
int needsUpdatedDriver = 0;
unsigned int minDriverVersionMajor = 0;
unsigned int minDriverVersionMinor = 0;

```

```

NVSDK NGX_Parameter *Params = nullptr;
bool bShouldDestroyCapabilityParams = true;
NVSDK NGX_Result Result = NVSDK NGX_VULKAN_GetCapabilityParameters(&Params);

if(Result != NVSDK NGX_Result_Success)
{
    bShouldDestroyCapabilityParams = false;
    NVSDK NGX_VULKAN_GetParameters(&Params);
}

NVSDK NGX_Result ResultUpdatedDriver =
    Params->Get(NVSDK NGX_Parameter_SuperSampling_NeedsUpdatedDriver, &needsUpdatedDriver);

NVSDK NGX_Result ResultMinDriverVersionMajor =
    Params->Get(NVSDK NGX_Parameter_SuperSampling_MinDriverVersionMajor, &minDriverVersionMajor);
NVSDK NGX_Result ResultMinDriverVersionMinor =
    Params->Get(NVSDK NGX_Parameter_SuperSampling_MinDriverVersionMinor, &minDriverVersionMinor);

if (NVSDK NGX_SUCCEEDED(ResultUpdatedDriver))
{
    if (needsUpdatedDriver)
    {
        // NVIDIA DLSS cannot be loaded due to outdated driver.
        if (NVSDK NGX_SUCCEEDED(ResultMinDriverVersionMajor) &&
            NVSDK NGX_SUCCEEDED(ResultMinDriverVersionMinor))
        {
            // Min Driver Version required: minDriverVersionMajor.minDriverVersionMinor
        }
        // Fallback to default AA solution (TAA etc)
    }
    else
    {
        // driver update is not required - so application is not expected to
        // query minDriverVersion in this case
    }
}

NVSDK NGX_Result ResultDlssSupported =
    Params->Get(NVSDK NGX_Parameter_SuperSampling_Available,&DLSS_Supported);

if (NVSDK NGX_FAILED(ResultDlssSupported) || !DLSS_Supported )
{
    // NVIDIA DLSS not available on this hardware/platform.

    // Fallback to default AA solution (TAA etc)
}

ResultDlssSupported =
    Params->Get(NVSDK NGX_Parameter_SuperSampling_FeatureInitResult,&DLSS_Supported);

if (NVSDK NGX_FAILED(ResultDlssSupported) || !DLSS_Supported )
{
    // NVIDIA DLSS is denied on for this application.

    // Fallback to default AA solution (TAA etc)
}

if(bShouldDestroyCapabilityParams)
{
    NVSDK NGX_VULKAN_DestroyParameters(Params);
}

```

```
Params = nullptr;
}
```

## 5.2.7 Overriding Feature Denial

Application developers that are using DLSS should have the ability to override whether or not a feature is denied, in order to help them test what would happen in case we were to ever disable the feature for their application.

Overriding the feature denial mechanism will have to be supported via windows regkeys (similar to how most of the other overrides are supported in NGX). All regkeys for this override must be written to HKLM\SOFTWARE\NVIDIA Corporation\Global\NGXCore.

The various regkeys required for developing this override are:

### **OverrideFeatureDeny**

- a. Type: REG\_DWORD
- b. Values: whether or not to enable overriding - 0 = disable overriding, non-zero: enable overriding
- c. Default behavior: disable overriding

### **OverrideFeatureDeny\_CMSID**

- a. Type: REG\_SZ
- b. Values: CMS ID for the specific application being overridden; if app doesn't have a unique CMS ID or if app dev doesn't know the CMS ID for their app, do not create this regkey
- c. Default behavior: apply override behavior to all apps

### **OverrideFeatureDeny\_Feature**

- a. Type: REG\_SZ
- b. Values: feature name for the specific feature being overridden; do not create regkey if all features are to be overridden
- c. Default behavior: apply override behavior to all features

### **OverrideFeatureDeny\_Deny**

- a. Type: REG\_DWORD
- b. Values: whether or not to deny the feature - 0 = allow, 1 = deny
- c. Default behavior: allow

In Linux, overriding is not yet supported.

## 5.2.8 Obtaining the Optimal Settings for DLSS

Once DLSS is confirmed as available on the user's system, obtain the optimal render target size for DLSS. This size is based on various factors including the type of GPU and whether RTX (raytracing) is on or off.

To obtain the optimal resolution settings for DLSS issue the query below. The developer should confirm the returned `DLSSMode` for each combination of:

- Target display resolution size
- PerfQualityValue

**NOTE:** The `PerfQualityValue` is currently defined in the NGX DLSS header as having five possible values. All five `PerfQualityValue` values should be checked and if they are enabled, they should be selectable in the Game UI (and hidden if disabled). For more information on these values, see section 3.2.1.

### 5.2.8.1 Optimal resolution settings query:

```
// Assuming the game is looping through all combinations for the following:
//
// Resolution (TargetWidth, TargetHeight)
// PerfQualityValue
// [0 MaxPerformance, 1 Balance, 2 MaxQuality, 3 UltraPerformance, 4 UltraQuality]

unsigned int RenderWidth, RenderHeight;
float Sharpness = 0.0f; // Sharpening is deprecated, see section 3.11

DLSSMode = NGX_DLSS_GET_OPTIMAL_SETTINGS(
    Params,
    TargetWidth, TargetHeight,
    PerfQualityValue,
    &RecommendedOptimalRenderWidth, &RecommendedOptimalRenderHeight,
    &DynamicMaximumRenderSizeWidth, &DynamicMaximumRenderSizeHeight,
    &DynamicMinimumRenderSizeWidth, &DynamicMinimumRenderSizeHeight,
    &Sharpness);

if (RecommendedOptimalRenderWidth == 0 || RecommendedOptimalRenderHeight == 0)
(
{
    // This PerfQuality mode has not been made available yet.
    // Please request another PerfQuality mode.
}
else
{
    // Use DLSS for this combination
    // - Create feature with RecommendedOptimalRenderWidth, RecommendedOptimalRenderHeight
    // - Render to (RenderWidth, RenderHeight) between Min and Max inclusive
    // - Call DLSS to upscale to (TargetWidth, TargetHeight)
}
}
```

## 5.3 Feature Creation

When all necessary parameters are set, create the DLSS feature. The following code can be used to create the feature:

```
// For a reference - taken from nvngx_ngx_defs.h
typedef enum NVSDK NGX_DLSS_Feature_Flags
{
    NVSDK NGX_DLSS_Feature_Flags_IsInvalid      = 1 << 31,

    NVSDK NGX_DLSS_Feature_Flags_None          = 0,
    NVSDK NGX_DLSS_Feature_Flags_IsHDR         = 1 << 0,
    NVSDK NGX_DLSS_Feature_Flags_MVLowRes      = 1 << 1,
```



```

    NVSDK_NGX_DLSS_Feature_Flags_MVJittered    = 1 << 2,
    NVSDK_NGX_DLSS_Feature_Flags_DepthInverted = 1 << 3,
    NVSDK_NGX_DLSS_Feature_Flags_Reserved_0   = 1 << 4,
    NVSDK_NGX_DLSS_Feature_Flags_AutoExposure = 1 << 6,
} NVSDK_NGX_DLSS_Feature_Flags;

typedef struct NVSDK_NGX_Feature_Create_Params
{
    unsigned int InWidth;           // Obtained via NGX_DLSS_GET_OPTIMAL_SETTINGS
    unsigned int InHeight;          // Obtained via NGX_DLSS_GET_OPTIMAL_SETTINGS
    unsigned int InTargetWidth;     // Target width (final resolution)
    unsigned int InTargetHeight;    // Target height (final resolution)
    NVSDK_NGX_PerfQuality_Value InPerfQualityValue;
    // User selection in UI: MaxPerf, Balanced, MaxQuality, UltraPerformance, UltraQuality
} NVSDK_NGX_Feature_Create_Params;

typedef struct NVSDK_NGX_DLSS_Create_Params
{
    NVSDK_NGX_Feature_Create_Params Feature;
    /*** OPTIONAL ***/
    int InFeatureCreateFlags; // Combination of NVSDK_NGX_DLSS_Feature_Flags
    bool InEnableOutputSubrects; // Whether to use subrects in the output resource
} NVSDK_NGX_DLSS_Create_Params;

NGX_D3D11_CREATE_DLSS_EXT(
CommandCtx, // Command context
&FeatureHandle[Node], // Handle for the new feature
Params, // Parameters obtained with NVSDK_NGX_AllocateParameters
&DlssCreateParams // Parameters in NVSDK_NGX_DLSS_Create_Params struct
);

NGX_D3D12_CREATE_DLSS_EXT(
CommandList[Node], // Command list for current GPU node
CreationNodeMask, // Multi GPU only (default 1)
VisibilityNodeMask // Multi GPU only (default 1)
&FeatureHandle[Node], // Handle for the new feature
Params, // Parameters obtained with NVSDK_NGX_AllocateParameters
&DlssCreateParams // Parameters in NVSDK_NGX_DLSS_Create_Params struct
);

NGX_VULKAN_CREATE_DLSS_EXT(
VkCommandBuffer, // Vulkan Command Buffer
CreationNodeMask, // Multi GPU only (default 1)
VisibilityNodeMask // Multi GPU only (default 1)
&FeatureHandle[Node], // Handle for the new feature
Params, // Parameters obtained with NVSDK_NGX_AllocateParameters
&DlssCreateParams // Parameters in NVSDK_NGX_DLSS_Create_Params struct
);

```

**NOTE:** If `NVSDK_NGX_AllocateParameters` may fail with `NVSDK_NGX_Result_FAIL_OutOfDate`, if the user is using an older driver version. In that case, the app should fall back on using `NVSDK_NGX_GetParameters` to get a parameter map to use in the above functions. Note however, that `NVSDK_NGX_GetParameters` is soon to be deprecated, and its use as a fallback by apps is intended as a stopgap, until a new enough driver version is widely installed.

**Limitation:** `InTargetWidth` and `InTargetHeight` currently have a limitation on their minimum size. They must be at least 64 pixels for the width and 32 pixels for the height. The call to `Create` or `Evaluate` the feature may fail as a result of this limitation.

## 5.4 Feature Evaluation

Features are evaluated by executing an inference call on a specific algorithm and deep learning model. For DLSS the evaluation calls are:

```
// D3D12      - NVSDK NGX_D3D12_Feature_Eval_Params
// VULKAN     - NVSDK NGX_VK_Feature_Eval_Params
typedef struct NVSDK NGX_D3D11_Feature_Eval_Params
{
    ID3D11resource* pInColor;           // Color buffer
    ID3D11resource* pInOutput;         // Output buffer
    /*** OPTIONAL for DLSS ***/
    float           InSharpness;       // Deprecated, see section 3.11
} NVSDK NGX_D3D11_Feature_Eval_Params

typedef enum NVSDK NGX_ToneMapperType
{
    NVSDK NGX_TONEMAPPER_STRING = 0,
    NVSDK NGX_TONEMAPPER_REINHARD,
    NVSDK NGX_TONEMAPPER_ONEOVERLUMA,
    NVSDK NGX_TONEMAPPER_ACES,
    NVSDK NGX_TONEMAPPERTYPE_NUM
} NVSDK NGX_ToneMapperType;

typedef enum NVSDK NGX_GBufferType
{
    NVSDK NGX_GBUFFER_ALBEDO = 0,
    NVSDK NGX_GBUFFER_ROUGHNESS,
    NVSDK NGX_GBUFFER_METALLIC,
    NVSDK NGX_GBUFFER_SPECULAR,
    NVSDK NGX_GBUFFER_SUBSURFACE,
    NVSDK NGX_GBUFFER_NORMALS,
    // unique identifier for drawn object or how the object is drawn
    NVSDK NGX_GBUFFER_SHADINGMODELID,
    NVSDK NGX_GBUFFER_MATERIALID, // unique identifier for material
    NVSDK NGX_GBUFFERTYPE_NUM = 16
} NVSDK NGX_GBufferType;

// D3D12      - D3D12_GBuffer
// VULKAN     - VK_GBuffer
typedef struct NVSDK NGX_D3D11_GBuffer
{
    ID3D11Resource* pInAttrib[GBUFFERTYPE_NUM];
} NVSDK NGX_D3D11_GBuffer;

typedef struct NVSDK NGX_Coordinates
{
    unsigned int X;
    unsigned int Y;
} NVSDK NGX_Coordinates;

// D3D12      - NVSDK NGX_D3D12_DLSS_Eval_Params
// VULKAN     - NVSDK NGX_VK_DLSS_Eval_Params
typedef struct NVSDK NGX_D3D11_DLSS_Eval_Params
{
    NVSDK NGX_D3D11_Feature_Eval_Params Feature;
    ID3D11Resource* pInDepth;           // Depth buffer
    ID3D11Resource* pInMotionVectors;  // MVs buffer
}
```

```

/* Jitter Offsets in pixel space */
float          InJitterOffsetX;
float          InJitterOffsetY;
NVSDK_NGX_Dimensions  InRenderSubrectDimensions;
/** OPTIONAL **/
int           InReset;// Resets history buffer for scene transitions.
float        InMVScaleX;           // MotionVector Scale X
float        InMVScaleY;           // MotionVector Scale Y
ID3D11Resource*  pInTransparencyMask;
ID3D11Resource*  pInExposureTexture; // Exposure texture 1x1
NVSDK_NGX_Coordinates  InColorSubrectBase;// Offsets into input/output buffers
NVSDK_NGX_Coordinates  InDepthSubrectBase;
NVSDK_NGX_Coordinates  InMVSubrectBase;
NVSDK_NGX_Coordinates  InTranslucencySubrectBase;
NVSDK_NGX_Coordinates  InOutputSubrectBase;
float        InPreExposure;// Pre-exposure if applicable
/** OPTIONAL - only for research purposes **/
/* per pixel mask identifying alpha-blended objects like particles etc. */
NVSDK_NGX_D3D11_GBuffer  GBufferSurface;
NVSDK_NGX_ToneMapperType  InToneMapperType;
ID3D11Resource*  pInMotionVectors3D;
ID3D11Resource*  pInIsParticleMask;
ID3D11Resource*  pInAnimatedTextureMask;
ID3D11Resource*  pInDepthHighRes;
ID3D11Resource*  pInPositionViewSpace;
float        InFrameTimeDeltaInMsec;
ID3D11Resource*  pInRayTracingHitDistance;
ID3D11Resource*  pInMotionVectorsReflections;
} NVSDK_NGX_D3D11_DLSS_Eval_Params;

NGX_D3D11_EVALUATE_DLSS_EXT(
Context,          // Command context
FeatureHandle,   // Handle for the new feature
Params,          // Parameters obtained with NVSDK_NGX_AllocateParameters
D3D11DlssEvalParams // Parameters in NVSDK_NGX_D3D11_DLSS_Eval_Params struct
);

NGX_D3D12_EVALUATE_DLSS_EXT(
CommandList[Node], // Command list for GPU node
FeatureHandle[Node], // Handle for the new feature
Params,          // Parameters obtained with NVSDK_NGX_AllocateParameters
D3D12DlssEvalParams // Parameters in NVSDK_NGX_D3D12_DLSS_Eval_Params struct
);

NGX_VULKAN_EVALUATE_DLSS_EXT(
VkCommandBuffer, // Vulkan Command Buffer
&FeatureHandle[Node], // Handle for the feature
Params,          // Parameters obtained with NVSDK_NGX_AllocateParameters
VkDlssEvalParams // Parameters in NVSDK_NGX_VK_DLSS_Eval_Params struct
);

```

**IMPORTANT:** NGX modifies the Vulkan and D3D12 command list states. The calling process must save and restore its own Vulkan or D3D12 state before and after making the NGX evaluate feature calls.

**NOTE:** If NVSDK\_NGX\_AllocateParameters may fail with NVSDK\_NGX\_Result\_FAIL\_OutOfDate, if the user is using an older driver version. In that case, the app should fall back on using NVSDK\_NGX\_GetParameters to get a parameter map to use in the above functions. Note

however, that NVSDK NGX\_GetParameters is soon to be deprecated, and its use as a fallback by apps is intended as a stopgap, until a new enough driver version is widely installed.

### 5.4.1 Vulkan Resource Wrapper

A resource wrapper is used to pass metadata which is otherwise not available. This wrapper structure must be used as an argument instead of directly passing in Vulkan resources and can be used for VkImageView and VkBuffer resources. At present, only VkImageView resources are used as parameters to NGX. The following is the wrapper struct, and creation function signature:

```
typedef enum NVSDK NGX_Resource_VK_Type
{
    NVSDK NGX_RESOURCE_VK_TYPE_VK_IMAGEVIEW,
    NVSDK NGX_RESOURCE_VK_TYPE_VK_BUFFER
} NVSDK NGX_Resource_VK_Type;

typedef struct NVSDK NGX_ImageViewInfo_VK {
    VkImageView ImageView;
    VkImage Image;
    VkImageSubresourceRange SubresourceRange;
    VkFormat Format;
    unsigned int Width;
    unsigned int Height;
} NVSDK NGX_ImageViewInfo_VK;

typedef struct NVSDK NGX_BufferInfo_VK {
    VkBuffer Buffer;
    unsigned int SizeInBytes;
} NVSDK NGX_BufferInfo_VK;

typedef struct NVSDK NGX_Resource_VK {
    union {
        NVSDK NGX_ImageViewInfo_VK ImageViewInfo;
        NVSDK NGX_BufferInfo_VK BufferInfo;
    } Resource;
    NVSDK NGX_Resource_VK_Type Type;
    bool ReadWrite; // True if the resource is available for read and write access.
                   // For VkImage: VkImageUsageFlags for the associated VkImage includes
                   // VK_IMAGE_USAGE_STORAGE_BIT
} NVSDK NGX_Resource_VK;

static NVSDK NGX_Resource_VK NVSDK NGX_Create_ImageView_Resource_VK(VkImageView imageView,
VkImage image, VkImageSubresourceRange subresourceRange, VkFormat format, unsigned int width,
unsigned int height, bool readWrite);
```

## 5.5 Feature Disposal

When a feature is no longer needed, it should be released by calling the following method:

```
// NVSDK NGX_Release
// -----
//
// InHandle:
//     Handle to feature to be released
//
```

```

// DESCRIPTION:
//     Releases feature with a given handle.
//     Handles are not reference counted so
//     after this call it is invalid to use provided handle.
//

NVSDK NGX_API NVSDK NGX_Result NVSDK_CONV NVSDK NGX_D3D11_ReleaseFeature(NVSDK NGX_Handle
*InHandle);

NVSDK NGX_API NVSDK NGX_Result NVSDK_CONV NVSDK NGX_D3D12_ReleaseFeature(NVSDK NGX_Handle
*InHandle);

NVSDK NGX_API NVSDK NGX_Result NVSDK_CONV NVSDK NGX_VULKAN_ReleaseFeature(NVSDK NGX_Handle
*InHandle);

```

Once released, the feature handle cannot be used any longer.

A feature handle should only be released once the command lists (Direct3D) or command buffers (Vulkan) that were used in Evaluate\_XXX() calls are no longer in flights as that command list could still reference internal states and resources associated with the feature.

## 5.6 Shutdown

To release the NGX SDK instance and all resources allocated with it, use the following method:

```

// NVSDK NGX_Shutdown
// -----
//
// DESCRIPTION:
//     Shuts down the current SDK instance and releases all resources.
//
NVSDK NGX_API NVSDK NGX_Result NVSDK_CONV NVSDK NGX_D3D11_Shutdown();
NVSDK NGX_API NVSDK NGX_Result NVSDK_CONV NVSDK NGX_D3D12_Shutdown();
NVSDK NGX_API NVSDK NGX_Result NVSDK_CONV NVSDK NGX_VULKAN_Shutdown(void);

```

The Shutdown() function should only be called once when all associated features have been released. That also means no work associated with those features is still in flight.

## 5.7 Init and Shutdown More than Once

Starting from SDK version 0x15 we support multiple devices. This means you can call Init() more than once – once per device. Legacy Shutdown() call does not have device pointer – so it will shut down NGX on ALL devices. To support shutting down NGX on one device, but not on others - new API called Shutdown1(Device) is introduced.

# 6 Resource Management

DLSS requires certain internal resources to be created. If a game requires full control over the NGX resource lifecycle and VRAM allocation, it is possible to register specific callbacks for resource creation

and destruction. As well, parameter maps allocated using `NVSDK_NGX_AllocateParameters` or `NVSDK_NGX_GetCapabilityParameters` must be destroyed by the app using `NVSDK_NGX_DestroyParameters`. This can be achieved by doing the following:

## 6.1 D3D11 Specific

Registering callbacks:

```
void NGXBufferAllocCallback(D3D11_BUFFER_DESC *InDesc, ID3D11Buffer **OutResource)
{
    *OutResource = nullptr;
    HRESULT hr = MyDevice->CreateBuffer(InDesc, nullptr, OutResource);
    if (hr != S_OK)
    {
        // Handle error;
    }
}

Params->Set(NVSDK_NGX_Parameter_BufferAllocCallback, NGXBufferAllocCallback);
```

Destroying a parameter map:

```
NVSDK_NGX_D3D11_DestroyParameters(Params); // Note: Params must
// have been allocated using NVSDK_NGX_D3D11_AllocateParameters
// or NVSDK_NGX_D3D11_GetCapabilityParameters, NOT the soon to be deprecated
// NVSDK_NGX_D3D12_GetParameters. Parameter maps allocated
// using NVSDK_NGX_D3D11_GetParameters will have their memory managed by NGX.
```

## 6.2 D3D12 Specific

Registering callbacks:

```
void NGXResourceAllocCallback(D3D12_RESOURCE_DESC *InDesc, int InState,
CD3DX12_HEAP_PROPERTIES *InHeap, ID3D12Resource **OutResource)
{
    *OutResource = nullptr;
    // Or obtain matching resource from the cache etc
    HRESULT hr = MyDevice->CreateCommittedResource(InHeap, D3D12_HEAP_FLAG_NONE,
        InDesc, (D3D12_RESOURCE_STATES)InState,
        nullptr, IID_PPV_ARGS(OutResource));
    if (hr != S_OK)
    {
        // Handle error
    }
}

Params->Set(NVSDK_NGX_Parameter_ResourceAllocCallback, NGXResourceAllocCallback);
```

Destroying a parameter map:

```
NVSDK_NGX_D3D12_DestroyParameters(Params); // Note: Params must
// have been allocated using NVSDK_NGX_D3D12_AllocateParameters
// or NVSDK_NGX_D3D12_GetCapabilityParameters, NOT the soon to be deprecated
// NVSDK_NGX_D3D12_GetParameters. Parameter maps allocated
```

```
// using NVSDK NGX_D3D12_GetParameters will have their memory managed by NGX.
```

## 6.3 Vulkan Specific

Destroying a parameter map:

```
NVSDK NGX_VULKAN_DestroyParameters(Params); // Note: Params must  
// have been allocated using NVSDK NGX_VULKAN_AllocateParameters  
// or NVSDK NGX_VULKAN_GetCapabilityParameters, NOT the soon to be deprecated  
// NVSDK NGX_VULKAN_GetParameters. Parameter maps allocated  
// using NVSDK NGX_VULKAN_GetParameters will have their memory managed by NGX.
```

## 6.4 Common

```
void NGXResourceReleaseCallback(IUnknown *InResource)  
{  
    // Delay release as needed or manage based on use case  
    SAFE_RELEASE(InResource);  
}  
  
Params->Set(NVSDK NGX_Parameter_ResourceReleaseCallback,  
           NGXResourceReleaseCallback);
```

**NOTE:** NGX does not hold a reference to any DirectX resource passed to it from the client side.

# 7 Multi GPU Support

## 7.1 Linked Mode

When creating DLSS feature in linked mode, one must specify Node on which DLSS feature is created. For that use CreationNodeMask. VisibilityNodeMask used during feature creation refers to resources created by DLSS feature internally.

By default, DLSS feature will be evaluated on the GPU where it has been created. It is possible to evaluate DLSS feature on any node which was included in the VisibilityNodeMask. To evaluate DLSS feature on another node, use NVSDK NGX\_EParameter\_EvaluationNode parameter.

The code example below, shows how to use DLSS in Linked mode

```
UINT NodeCount = Device->GetNodeCount();  
UINT VisibilityMask = (1 << NodeCount) - 1;  
UINT CreationNodeMask = (1 << Node);  
  
Status = NGX_D3D12_CREATE_DLSS(&FeatureHandle[Node], Params,  
                               MyCommandList[Node], Width, Height, PerfQualityValue,  
                               RTXValue, CreationNodeMask, VisibilityNodeMask);  
  
// evaluate on default node  
Status = NGX_D3D12_EVALUATE_DLSS(FeatureHandle[Node], Params,  
                                 MyCommandList[Node], Color, MV, Output, PrevOutput, Depth);
```

```

if (NVSDK NGX_FAILED(Status)) { // Handle error };

// evaluate on non-default node
if (Node + 1 < NodeCount)
{
    Params->Set(NVSDK NGX_EParameter_EvaluationNode, Node + 1);
    Status = NGX_D3D12_EVALUATE_DLSS(FeatureHandle[Node], Params,
        MyCommandList[Node + 1], Color, MV, Output, PrevOutput, Depth);
    if (NVSDK NGX_FAILED(Status)) { // Handle error };
}

```

**NOTE:** When using D3D11 basic multi-GPU/SLI (Alternate Frame Rendering - AFR), multi-GPU support is provided directly by the NVIDIA driver and there are no additional integration requirements.

## 7.2 Unlinked mode

In the unlinked mode each GPU is independent, so one can call `NGX_Init()` on each GPU independently of others. It's important to note here that we have several ways of shutting NGX down.

- `NGX_Shutdown()` call will shutdown NGX on ALL GPUs;
- `NGX_Shutdown1(Device *)` API will shutdown NGX just on single device that was passed as parameter;
- `NGX_Shutdown1(nullptr)` call works identically to `NGX_Shutdown()` call;

Another API relevant to this case is `NGX_VULKAN_CreateFeature1()`. This API is specifically introduced to create feature in unlinked mode for VULKAN. The reason that VULKAN is different here is that VULKAN does not allow inferring Device pointer from command buffer pointer. D3D11 and D3D12 do allow that so for them `NGX_CreateFeature()` will work fine in unlinked mode.

**Note:** this is supported only on 470+ drivers and only if you explicitly specify NGX API Version  $\geq 0x15$  when you call `NGX_Init()`

# 8 Troubleshooting

## 8.1 Common Issues Causing Visual Artifacts

1. Incorrect motion vectors: make sure you can always visualize and validate motion vectors (see the DLSS debug overlay section below).
  - a. Make sure the motion vectors are pointing in a direction indicating how to get the pixel in screen space from the current frame to its position in the previous frame in screen space. So, if the game is running at 1080p and the object has moved from the left edge of the screen to the right edge, then the x value of the motion vector for that pixel on the right edge will be -1080.0.
  - b. Make sure the motion vectors are expressed in 16-bit or 32-bit floating point values. Using integer values will not take sub-pixel values into account.



- c. Make sure motion vectors are in screen space and take dynamic object movements into account.
  - d. Make sure all objects visible on screen have motion vectors calculated correctly. Common places to miss out motion vectors include animated foliage, the sky.
2. Wrong or out of sync jitter pattern: make sure you are using the sequence provided in section 3.7. The jitter pattern must match regardless of frame time etc.
3. Disabling TAA often changes the way the engine renders (jitter, depth, motion etc.) which can consequently break DLSS. When integrating DLSS, the TAA rendering pass should be replaced with DLSS but **everything else** in the rendering pipeline that is activated when TAA is turned on, must still be executed as if TAA is still active.
  - a. Ensure that all input to DLSS is properly jittered. This includes secondary passes that might otherwise have not been jittered (e.g. object highlighting).
4. Incorrect exposure / or pre-exposure (see section 3.9): make sure you always pass in the correct exposure texture or pre-exposure value to avoid:
  - a. Ghosting of moving objects.
  - b. Blurriness, banding, or pixilation of the final frame or it being too dark or too bright.
  - c. Aliasing especially of moving objects.
  - d. A pronounced lag in the scene brightness changing when going from a dark scene to a bright scene (or vice versa).
5. In low VRAM scenarios, the game may crash if DLSS is invoked while required resources (Color, Motion Vectors etc.) are evicted from the GPU. If this happens please make sure all resources are made resident before using DLSS.
6. Use the on-screen debug text (see section 3.8) to verify the resolution of the buffers that are passed into the DLSS module.
7. Incorrect resource setup: make sure you create the buffers passed to DLSS with the requires usage flags (see chapter 3.4). Otherwise, the output may be black without further indication as to what went wrong.

## 8.2 DLSS Debug Overlay

The DLSS SDK development library includes a debugging overlay which allows you to visualize the inputs used by DLSS. To enable and cycle through the various debug layers, use the CTRL+ALT+F12 hotkey. The debug layer appears as an overlay in the top right side of the screen and includes several different states including:

1. Current input color buffer
2. Current frame's motion vectors

3. Current frame's depth buffer (black is the near plane passing through blue, purple, pink with white being the far plane)
4. The history of submitted jitter offsets in an XY scatter plot [-1, 1] (green is the current offset, white and red represent old offsets that are within the correct boundary [-0.5, 0.5] and outside it, respectively). If old, interior offsets are colored yellow, it means that the recommended number of phases has not been met yet (see section 3.7 for more information)
5. Current frame Exposure scale texture
6. A pattern that helps diagnose bad exposure texture being passed to DLSS.

To toggle the debug visualization between an overlay window in the top right of the screen and fullscreen, use the CTRL+ALT+F11 hotkey.

**NOTE:** The DLSS production library does **not** include the Debug Overlay.


## 8.3 DLSS Debug Accumulation Mode

The DLSS SDK library includes a special mode that permanently accumulates all input. This can be useful when debugging issues with motion vector and jitter by examining static scenes. When enabled, a static scene should resolve *perfectly* with no aliasing, blurring or unclear areas. The static scene should look identical to the same scene rendered at full resolution without DLSS (and other AA and post).

To enable accumulation mode, press the CTRL+ALT+F6 hotkey.

The CTRL+ALT+F6 key will cycle between three modes :

- JITTER\_DEBUG\_NONE : normal DLSS display
- JITTER\_DEBUG\_ACCUMULATION : simple accumulation mode
- JITTER\_DEBUG\_JITTER : special advanced jitter debugging mode. See section **Error!** Reference source not found. below for details.

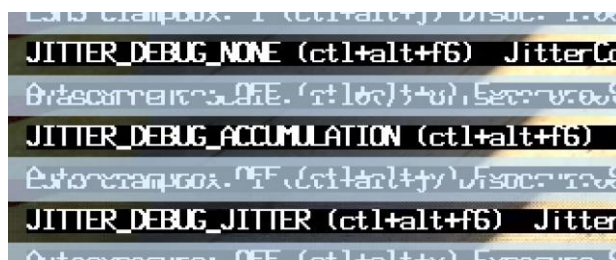

**NOTE:** If accumulation mode is enabled and anything in the scene moves or if the camera moves, you will see *heavy* ghosting and trails. That is expected.

## 8.4 Jitter Troubleshooting

As explained in section 3.7, DLSS requires sub-pixel jitter to properly resolve high-resolution output from lower resolution rendered frames. Different rendering engines implement sub-pixel jitter in different

ways. Some flip or scale the amount of the offset, some apply jitter only when the camera is static, some add jitter to motion vectors. These differences can lead to graphical corruption when DLSS is applied to a frame. In such cases, try the following to debug the issue.

### 8.4.1 Initial Jitter Debugging

1. Use the jitter offset debug overlay to ensure the jitter offset values are **always** between -0.5 and +0.5 (inside the blue border and there are no red pixels). Also ensure that the distribution coverage and number of phases is sufficient for the target and render resolution by comparing with first “# Jitter Offsets” value against the second (see section 3.7 for more information).
2. Turn off all in-engine AA and turn off all post processing (or just render the albedo from the gbuffer).
3. With a static scene and no motion, the output from DLSS should match the same scene rendered at native full resolution (with no AA and no post processing).
4. Add a debug hotkey to the game or engine to toggle between:
  - a. DLSS on with 50% rendering (typically called “DLSS Performance Mode”); and
  - b. full resolution rendering with no AA (and DLSS disabled).
5. Use the in-built Microsoft Windows "Screen Magnifier" utility to zoom-in while the game is running and toggle back and forth between native rendering and DLSS.
  - a. Screen Magnifier enable hotkey: Windows logo key + Plus sign (+) on the keyboard
  - b. Screen Magnifier disable hotkey: Windows logo key + Esc
  - c. Go into the Screen Magnifier settings and DISABLE "Smooth edges of images and text"
  - d. Full information is available here: <https://support.microsoft.com/en-us/help/11542/windows-use-magnifier-to-make-things-easier-to-see>
6. When rendering a static scene or when looking at static objects in a scene, if the output from DLSS looks blurry or flickers or is otherwise misaligned, something is off between the renderer and DLSS.
  - a. Confirm the jitter offset values are **always** between -0.5 and +0.5. They should **never** be outside this range. If they do go beyond that range, the renderer is moving the viewport outside the pixel (which will usually result in full screen shaking with DLSS on and off; or heavy blurriness when DLSS is on).
  - b. Try exchanging the jitter X and Y offsets using the CTRL+ALT+F10 hotkey built into the DLSS SDK library (see section 3.8 for more information).
    - i. If exchanging the axes resolves the issue, in the game or engine, exchange the jitter offsets before calling DLSS.
  - c. Try negating and scaling the jitter input values using the CTRL+ALT+F9 hotkey built into the DLSS SDK library (see section 3.8 for more information).

- i. If negating or scaling one or both axes resolves the issue, in the game or engine, negate or scale the value of the appropriate component (or components) before calling DLSS.
- d. Use the DLSS Debug Overlay (see section 8.2 above), or another method, to confirm that motion vectors are [0.0,0.0] for the entire screen (or at least on all static objects and areas of the screen where there is no movement).
  - i. If motion vectors are not correct, fix them for the material, object, terrain or other system as required. DLSS assumes the engine provides accurate per-pixel motion vectors every frame.

## 8.4.2 In-depth Jitter Debugging

If the simple debugging steps above do not fix the issue, a more in-depth process may be required. The first step is to implement a configurable jitter pattern in the rendering engine.


1. First, add a “1 quadrant jitter” where the renderer always jitters to a specific quadrant every frame with a hotkey to cycle all four quadrants in order.
  - a. If possible, add an on-screen indicator or debug text indicating the quadrant to which the renderer is currently jittering.
2. Second, add a “4 quadrant jitter” where the renderer jitters one frame to each quadrant cycling each quadrant in order automatically.

### 8.4.2.1 Single quadrant jitter debugging

1. Enable JITTER\_DEBUG\_JITTER mode using the CTRL+ALT+F6 hotkey (for more information, see section 8.3 above).
2. Ensure the output of DLSS is shown at 1:1 ratio on the screen. This debug mode will not be useful if ANY amount of scale change happens after DLSS is applied, either through the engine own upscaling or through the engine window being resized.
3. Find a static scene in the game and render the scene with the renderer jittering to a known and fixed quadrant.
4. Examine the screen output and use Screen Magnifier to better examine individual pixels.
5. If the renderer is correctly jittering, you should see groups of four pixels with one pixel in each group colored and three pixels that are completely black.
  - a. Cycle through each jitter quadrant and confirm the color moves to the correct quadrant **and** three pixels become completely black.
  - b. If there are less than three black pixels in each grouping, the amount of jitter, the scale of the jitter or the sign of jitter being sent is incorrect.



*Example output with single quadrant jitter.*

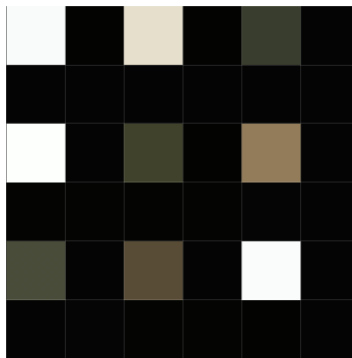

*Single quadrant jitter output under full zoom with correct jitter.  
Note the groups of four pixels; three black and one colored/filled.*

6. If the test in step 3 shows that the jitter is incorrect, try exchanging, negating or scaling the jitter vector components using the DLSS debug hotkeys (see section 8.4.1 above).
7. If changing the jitter scale or negating a component does not resolve the issue, find a static scene and:
  - a. Capture one screenshot while the renderer jitters to each quadrant (resulting in four screenshots total).
  - b. Turn on full resolution rendering, no AA, no post, no DLSS and capture one screenshot.

- c. Combine the four DLSS screenshots (using Adobe Photoshop or another tool) and examine the resulting image (which **will** show heavy aliasing – that is expected). Compare the combined DLSS image against the full resolution screen capture. Look for more aliasing in one direction or if the aliasing is more pronounced vertically or horizontally. In such case, check the amount of jitter applied in the rendering engine to the projection matrix:
  - i. If there is more vertical aliasing, check the Y axis jitter.
  - ii. Similarly, if there is more horizontal aliasing, check the X axis.

#### 8.4.2.2 *Four quadrant jitter debugging*

1. Enable DLSS JITTER\_DEBUG\_JITTER mode using the CTRL+ALT+F6 hotkey (for more information, see section 8.3 above).
2. Ensure the output of DLSS is shown at 1:1 ratio on the screen. This debug mode will not be useful if ANY amount of scale change happens after DLSS is applied, either through the engine own upscaling or through the engine window being resized.
3. Examine the screen output, using the Screen Magnifier to better examine individual pixels.
4. With the renderer cycling jitter to each of the four quadrants and DLSS enabled, the final image will be aliased and should match full resolution rendering with no AA, no DLSS and no post-processing.
  - a. It is easiest to compare simple static flat objects like planks of wood, tree trunks, metal posts, fence posts or other objects with straight edges.
  - b. Do NOT compare particles, transparent objects, or shadows.
5. If the test in step 3 shows differences in what DLSS displays versus native rendering, try exchanging, negating or scaling the jitter vector components using the DLSS debug hotkeys (see section 8.4.1 above).
6. If changing the jitter scale or negating a component does not resolve the issue, find a static scene and look for more aliasing in one direction or if the aliasing is more pronounced vertically or horizontally. In such case, check the amount of jitter applied in the rendering engine to the projection matrix:
  - a. If there is more vertical aliasing, check the Y axis jitter.
  - b. Similarly, if there is more horizontal aliasing, check the X axis.

## 8.5 Linux

For Linux, keypress Ctrl+Alt+F<NR> can switch terminals. In this case, keypress can be overridden with a config file named settings.ngxconfig and placed in ~/ngx/. For example, we can have it like in /root/ngx/settings.ngxconfig. An example of settings.ngxconfig:

```
| - dlss_debug
```

```
debug_accumulation_key = "ctl+alt+f6",          ;
debug_jitter_config_rotate_key = "ctl+alt+f9",   ;
debug_jitter_swap_coordinates_key = "ctl+alt+f10", ;
debug_visualization_size_key = "ctl+alt+fu",    ; instead of ctl+alt+f11 example
debug_visualization_mode_key = "ctl+alt+fv",    ; instead of ctl+alt+f12 example
```

## 8.6 Known Tooling Issues

1. RenderDoc does not support DLSS applications.

## 8.7 Error Codes

If an error is detected during NGX execution, NGX returns one of the following error codes:

- NVSDK NGX Result FAIL FeatureNotSupported  
Feature is not supported on current hardware.
- NVSDK NGX Result FAIL PlatformError  
Platform error - for example - check d3d12 debug layer log for more information.
- NVSDK NGX Result FAIL FeatureAlreadyExists  
Feature with given parameters already exists.
- NVSDK NGX Result FAIL FeatureNotFound  
Feature with provided handle does not exist.
- NVSDK NGX Result FAIL InvalidParameter  
Invalid parameter was provided.
- NVSDK NGX Result FAIL NotInitialized  
SDK was not initialized properly.
- NVSDK NGX Result FAIL UnsupportedInputFormat  
Unsupported format used for input/output buffers.
- NVSDK NGX Result FAIL RWFlagMissing  
Feature input/output needs RW access (UAV) (d3d11/d3d12 specific).
- NVSDK NGX Result FAIL MissingInput  
Feature was created with specific input, but none is provided at evaluation.
- NVSDK NGX Result FAIL UnableToInitializeFeature  
Feature is misconfigured or not available on the system.

- NVSDK\_NGX\_Result\_FAIL\_OutOfDate  
NGX runtime libraries are old and need an update. Inform user to install latest display driver provided by NVIDIA.
- NVSDK\_NGX\_Result\_FAIL\_OutOfGPUMemory  
Feature requires more GPU memory than is available on the system.
- NVSDK\_NGX\_Result\_FAIL\_UnsupportedFormat  
Format used in input buffer(s) is not supported by feature.
- NVSDK\_NGX\_Result\_FAIL\_UnableToWriteToAppDataPath  
Path provided in InApplicationDataPath cannot be written to
- NVSDK\_NGX\_Result\_FAIL\_UnsupportedParameter  
Unsupported parameter was provided (e.g. specific display size or mode is unsupported)
- NVSDK\_NGX\_Result\_FAIL\_Denied  
The feature or application was denied (contact NVIDIA for further details)



## 9 Appendix

### 9.1 Transitioning from DLSS 2.1.x to 3.1.x

Moving from DLSS version 2.1.x to 3.1.x should be a seamless process with the two being binary compatible. There are several new features available in v3.1.x:

1. Preset Updates via OTA (see section 2.4\_)
2. Model Selection API (see section 3.12)
3. Querying for Feature Support Requirements (see section 2.3)
4. Querying for Vulkan Extension Requirements (see section 2.3.1)
5. Deprecation of DLSS sharpening (see section 3.11)

### 9.2 Transitioning from DLSS 2.0.x to 2.1.x

Moving from DLSS version 2.0.x to 2.1 should also be a seamless process with the two being binary compatible. There are several new features available in v2.1.x:

1. Dynamic resolution support (see section 3.2.2)
2. Additional DLSS execution modes “Ultra-Performance” and “Ultra-Quality” (see section 3.2.1)
3. VR support (see section 3.14)
4. A pre-exposure factor is now supported if the renderer requires it (see section 3.9.2)

### 9.3 Minor Revision Updates

This section highlights the main updates for each minor revision:

1. 2.1.x to 2.2.x - Auto Exposure (see section 3.10)
2. 2.2.x to 2.3.x - Model improvement and opening DLSS publicly for all developers
3. 2.3.x to 2.4.x - Streamline Integration (see section 3.19)

### 9.4 Future DLSS Parameters

DLSS is a rolling suite of algorithms and neural networks that are under constant research and development by various groups at NVIDIA. As part of this research, NVIDIA is examining ways to use different data generated by the rendering engine to improve the overall image quality and performance of DLSS.

The following is a list of rendering engine resources that the DLSS library can optionally accept, and which may be used in future DLSS algorithms. If the developer can include some, or all, of these parameters, it can assist NVIDIA's ongoing research and may allow future improved algorithms to be used without game or engine code changes.

For details on how to pass these resources, please see the DLSS header files and if needed, discuss with your NVIDIA technical contact. Please also check that there is no undue performance impact when preparing and providing these resources to the DLSS library.

1. G-Buffer:
  - a. Albedo (supported format – 8-bit integer)
  - b. Roughness (supported format – 8-bit integer)
  - c. Metallic (supported format – 8-bit integer)
  - d. Specular (supported format – 8-bit integer)<sup>1</sup>
  - e. Subsurface (supported format – 8-bit integer)
  - f. Normals (supported format – RGB10A2, Engine-dependent)
  - g. Shading Model ID / Material ID : unique identifier for drawn object / material, essentially a segmentation mask for objects - common use case is to not accumulate, if the warped nearest material identifier is different from the current, (supported format – 8-bit or 16-bit integer, Engine-dependent)
2. HDR Tonemapper type: String, Reinhard, OneOverLuma or ACES
3. 3D motion vectors - (supported format – 16-bit or 32-bit floating-point)
4. Is-particle mask: to identify which pixels contains particles, essentially that are not drawn as part of base pass (supported format – 8-bit integer)
5. Animated texture mask: A binary mask covering pixels occupied by animated textures (supported format – 8-bit integer)
6. High Resolution depth: (supported format – D24S8)
7. View-space position: (supported format – 16-bit or 32-bit floating-point)
8. Frame time delta (in milliseconds): helps in determining the amount to denoise or anti-alias based on the speed of the object from motion vector magnitudes and fps as determined by this delta
9. Ray tracing hit distance: For Each effect - good approximation to the amount of noise in a ray-traced color (supported format – 16-bit or 32-bit floating-point)
10. Motion vector for reflections: motion vectors of reflected objects like for mirrored surfaces (supported format – 16-bit or 32-bit floating-point)

## 9.5 Notices

The information provided in this specification is believed to be accurate and reliable as of the date provided. However, NVIDIA Corporation (“NVIDIA”) does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information. NVIDIA shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This publication supersedes and replaces all other specifications for the product that may have been previously supplied.

NVIDIA reserves the right to make corrections, modifications, enhancements, improvements, and other changes to this specification, at any time and/or to discontinue any product or service without notice. Customer should obtain the latest relevant specification before placing orders and should verify that such information is current and complete.

NVIDIA products are sold subject to the NVIDIA standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NVIDIA and customer. NVIDIA hereby expressly objects to applying any customer general terms and conditions with regard to the purchase of the NVIDIA product referenced in this specification.

NVIDIA products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of the NVIDIA product can reasonably be expected to result in personal injury, death or property or environmental damage. NVIDIA accepts no liability for inclusion and/or use of NVIDIA products in such equipment or applications and therefore such inclusion and/or use is at customer's own risk.

NVIDIA makes no representation or warranty that products based on these specifications will be suitable for any specified use without further testing or modification. Testing of all parameters of each product is not necessarily performed by NVIDIA. It is customer's sole responsibility to ensure the product is suitable and fit for the application planned by customer and to do the necessary testing for the application in order to avoid a default of the application or the product. Weaknesses in customer's product designs may affect the quality and reliability of the NVIDIA product and may result in additional or different conditions and/or requirements beyond those contained in this specification. NVIDIA does not accept any liability related to any default, damage, costs or problem which may be based on or attributable to: (i) the use of the NVIDIA product in any manner that is contrary to this specification, or (ii) customer product designs.

No license, either expressed or implied, is granted under any NVIDIA patent right, copyright, or other NVIDIA intellectual property right under this specification. Information published by NVIDIA regarding third-party products or services does not constitute a license from NVIDIA to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property rights of the third party, or a license from NVIDIA under the patents or other intellectual property rights of NVIDIA. Reproduction of information in this specification is permissible only if reproduction is approved by NVIDIA in writing, is reproduced without alteration, and is accompanied by all associated conditions, limitations, and notices.

ALL NVIDIA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." NVIDIA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Notwithstanding any damages that customer might incur for any reason whatsoever, NVIDIA's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the NVIDIA terms and conditions of sale for the product.

## 9.5.1 Trademarks

NVIDIA and the NVIDIA logo are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

## 9.5.2 Copyright

© 2018-2020 NVIDIA Corporation. All rights reserved.

[www.nvidia.com](http://www.nvidia.com)

# 9.6 3rd Party Software

## 9.6.1 CURL

### COPYRIGHT AND PERMISSION NOTICE

Copyright © 1996 - 2018, Daniel Stenberg, [daniel@haxx.se](mailto:daniel@haxx.se), and many contributors, see the THANKS file.

All rights reserved.

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

## 9.6.2 8x13 BITMAP FONT

<https://courses.cs.washington.edu/courses/cse457/98a/tech/OpenGL/font.c>

```
* (c) Copyright 1993, Silicon Graphics, Inc.  
* ALL RIGHTS RESERVED  
* Permission to use, copy, modify, and distribute this software for  
* any purpose and without fee is hereby granted, provided that the above  
* copyright notice appear in all copies and that both the copyright notice  
* and this permission notice appear in supporting documentation, and that  
* the name of Silicon Graphics, Inc. not be used in advertising  
* or publicity pertaining to distribution of the software without specific,  
* written prior permission.  
*
```

```
* THE MATERIAL EMBODIED ON THIS SOFTWARE IS PROVIDED TO YOU "AS-IS"  
* AND WITHOUT WARRANTY OF ANY KIND, EXPRESS, IMPLIED OR OTHERWISE,  
* INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR  
* FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT SHALL SILICON  
* GRAPHICS, INC. BE LIABLE TO YOU OR ANYONE ELSE FOR ANY DIRECT,  
* SPECIAL, INCIDENTAL, INDIRECT OR CONSEQUENTIAL DAMAGES OF ANY  
* KIND, OR ANY DAMAGES WHATSOEVER, INCLUDING WITHOUT LIMITATION,  
* LOSS OF PROFIT, LOSS OF USE, SAVINGS OR REVENUE, OR THE CLAIMS OF  
* THIRD PARTIES, WHETHER OR NOT SILICON GRAPHICS, INC. HAS BEEN  
* ADVISED OF THE POSSIBILITY OF SUCH LOSS, HOWEVER CAUSED AND ON  
* ANY THEORY OF LIABILITY, ARISING OUT OF OR IN CONNECTION WITH THE  
* POSSESSION, USE OR PERFORMANCE OF THIS SOFTWARE.
```

## 9.6.3 d3dx12.h

<https://github.com/microsoft/DirectX-Graphics-Samples/blob/master/Samples/Desktop/D3D12Multithreading/src/d3dx12.h>

```
* Copyright © 2017 NVIDIA Corporation. All rights reserved.  
*  
* NOTICE TO USER:  
*  
* This software is subject to NVIDIA ownership rights under U.S. and international Copyright laws.  
*  
* This software and the information contained herein are PROPRIETARY and CONFIDENTIAL to NVIDIA  
* and are being provided solely under the terms and conditions of an NVIDIA software license agreement  
* and / or non-disclosure agreement. Otherwise, you have no rights to use or access this software in any manner.  
*  
* If not covered by the applicable NVIDIA software license agreement:  
* NVIDIA MAKES NO REPRESENTATION ABOUT THE SUITABILITY OF THIS SOFTWARE FOR ANY PURPOSE.  
* IT IS PROVIDED "AS IS" WITHOUT EXPRESS OR IMPLIED WARRANTY OF ANY KIND.  
* NVIDIA DISCLAIMS ALL WARRANTIES WITH REGARD TO THIS SOFTWARE,  
* INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY, NONINFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.  
* IN NO EVENT SHALL NVIDIA BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES,  
* OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT,  
* NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOURCE CODE.  
*  
* U.S. Government End Users.  
* This software is a "commercial item" as that term is defined at 48 C.F.R. 2.101 (OCT 1995),  
* consisting of "commercial computer software" and "commercial computer software documentation"  
* as such terms are used in 48 C.F.R. 12.212 (SEPT 1995) and is provided to the U.S. Government only as a commercial  
end item.  
* Consistent with 48 C.F.R.12.212 and 48 C.F.R. 227.7202-1 through 227.7202-4 (JUNE 1995),  
* all U.S. Government End Users acquire the software with only those rights set forth herein.  
*  
* Any use of this software in individual and commercial software must include,  
* in the user documentation and internal comments to the code,  
* the above Disclaimer (as applicable) and U.S. Government End Users Notice.  
*  
* Original code by Microsoft Corporation was obtained from  
* https://github.com/Microsoft/DirectX-Graphics-Samples/tree/master/Samples/Desktop/D3D12Multithreading  
* and licensed under MIT license (below)  
* NVIDIA license applies to changes made relative to original code.  
*  
* Copyright (c) Microsoft. All rights reserved.  
* This code is licensed under the MIT License (MIT).  
* THIS CODE IS PROVIDED *AS IS* WITHOUT WARRANTY OF  
* ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING ANY  
* IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR  
* PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT.
```

## 9.6.4 xml

<https://pugixml.org/license.html>

```
* This library is available to anybody free of charge, under the terms of MIT License:
```

```
* Copyright (c) 2006-2018 Arseny Kapoulkine
* Permission is hereby granted, free of charge, to any person obtaining a copy of this
* software and associated documentation files (the "Software"), to deal in the Software
* without restriction, including without limitation the rights to use, copy, modify, merge,
* publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons
* to whom the Software is furnished to do so, subject to the following conditions:
* The above copyright notice and this permission notice shall be included in all copies or
* substantial portions of the Software.
* THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED,
* INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR
* PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE
* FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR
* OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER
* DEALINGS IN THE SOFTWARE.
* This means that you can freely use pugixml in your applications, both open-source and
* proprietary. If you use pugixml in a product, it is sufficient to add an acknowledgment
* like this to the product distribution:
* This software is based on pugixml library (http://pugixml.org). pugixml is Copyright (C) *
2006-2018 Arseny Kapoulkine.
```

## 9.6.5 npy

<https://github.com/llhse/libnpy>

<https://github.com/llhse/libnpy/blob/master/LICENSE>

```
* MIT License

* Copyright (c) 2021 Leon Merten Lohse

* Permission is hereby granted, free of charge, to any person obtaining a copy
* of this software and associated documentation files (the "Software"), to deal
* in the Software without restriction, including without limitation the rights
* to use, copy, modify, merge, publish, distribute, sublicense, and/or sell
* copies of the Software, and to permit persons to whom the Software is
* furnished to do so, subject to the following conditions:

* The above copyright notice and this permission notice shall be included in all
* copies or substantial portions of the Software.

* THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
* IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
* FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
* AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
* LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
* OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE
* SOFTWARE.
```

## 9.6.6 stb

<https://github.com/nothings/stb/blob/master/LICENSE>

```
/*
* ALTERNATIVE A - MIT License
* Copyright (c) 2017 Sean Barrett
* Permission is hereby granted, free of charge, to any person obtaining a copy of
* this software and associated documentation files (the "Software"), to deal in
```

```
* the Software without restriction, including without limitation the rights to
* use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies
* of the Software, and to permit persons to whom the Software is furnished to do
* so, subject to the following conditions:
* The above copyright notice and this permission notice shall be included in all
* copies or substantial portions of the Software.
* THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR
* IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY,
* FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE
* AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER
* LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM,
* OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE
* SOFTWARE.
*/
```

## 9.6.7 DirectX-Graphics-Samples

<https://github.com/Microsoft/DirectX-Graphics-Samples/tree/master/Samples/Desktop/D3D12Multithreading>

```
/*
* Copyright (c) Microsoft. All rights reserved.
* This code is licensed under the MIT License (MIT).
* THIS CODE IS PROVIDED *AS IS* WITHOUT WARRANTY OF
* ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING ANY
* IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR
* PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT.
*/
```

## 9.7 Linux driver compatibility

The Linux driver no longer adheres to a strict minimum driver version compatibility model that can be queried by `NVSDK_NGX_Parameter_SuperSampling_MinDriverVersionMajor`.

Any NVIDIA Linux driver released starting 22 March 2022 (for instance, NVIDIA Linux driver 510.60.02) will only support DLSS snippets version  $\geq 2.4.0$ .

Any NVIDIA Linux driver released prior to that date will only support DLSS snippets version  $< 2.4.0$ .

Applications can support both old and new drivers by shipping with two snippets (one  $< 2.4.0$ , and one  $\geq 2.4.0$ ). In that case the application must have the paths to both snippets in `NVSDK_NGX_PathListInfo` (first – to the older snippet, then – to a newer snippet). The driver will access those snippets in order and use the first snippet it is able to load.

Windows versions of DLSS snippets (including those running on Steam Play Proton) are not affected by this restriction.