



MONASH
University

MONASH
BUSINESS
SCHOOL

Forecast Multivariate Time Series Using Lower Dimensional Components


Yangzhuoran Fin Yang

Rob J Hyndman


George Athanasopoulos

Anastasios Panagiotelis

What people do

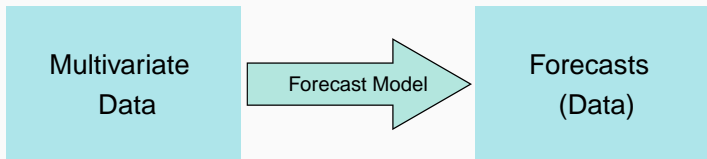

What we do

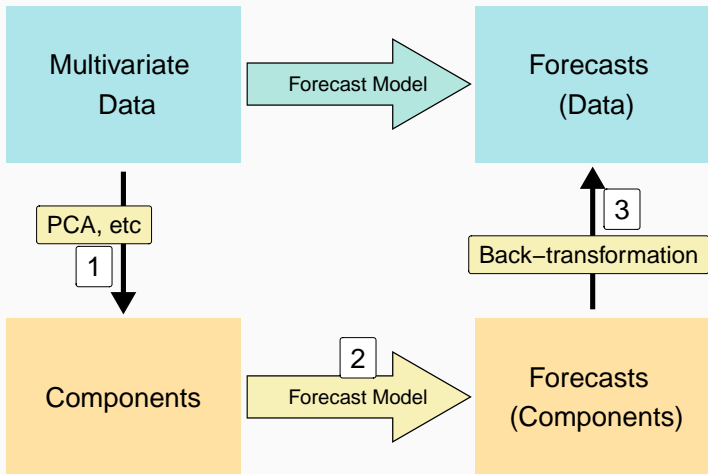


Australian tourism data

- The data include tourism information on seven states and territories which can be divided into 77 regions
 - ▶ For example, Melbourne, Sydney, East Coast


Visitor nights

The total number of nights spent by Australians away from home recorded monthly

Total and Region

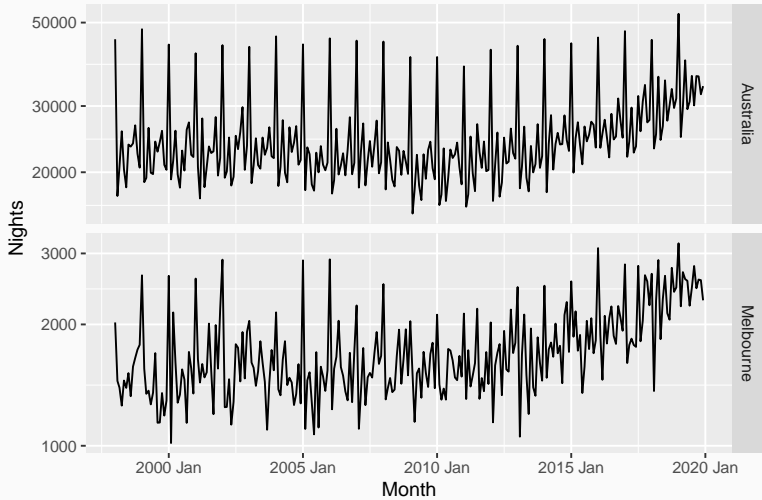

Melbourne and Sydney

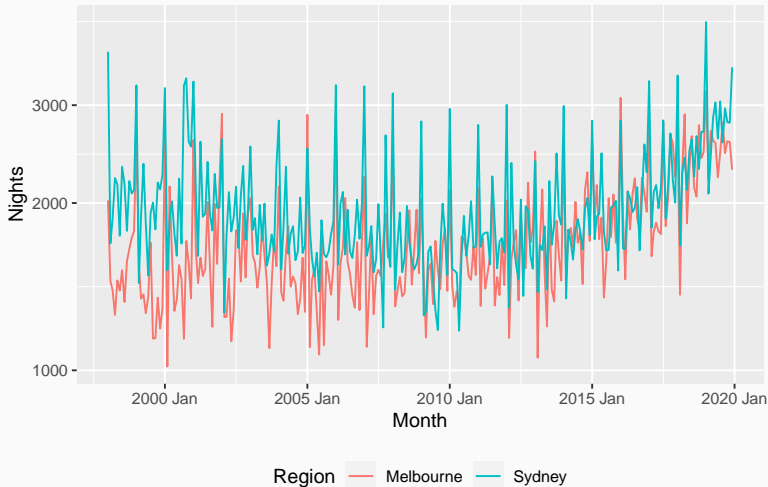

Intuition

Observation

1. Better signal-noise ratio in the linear combination.

Intuition

Observation

1. Better signal-noise ratio in the linear combination.
2. Similar patterns are shared by different series.

Intuition

Observation

1. Better signal-noise ratio in the linear combination.
2. Similar patterns are shared by different series.

One step further

Finding components that have better signal-noise ratio:

1. Easy to forecast;
2. Capturing the common signals;
3. Improving forecast of original series.

Literature

Factor model (Bai and Ng, 2008)

- 1 Linear transformation
- 2 VAR models


Dynamic Factor Machine Learning (DFML, De Stefani and Bontempi, 2021)

- 1 Nonlinear transformations with an inherent two-way mapping
 - ▶ Autoencoder
- 2 Machine learning forecast methods


Our differences

- 1 Allowing nonlinear transformations
- 2 Allowing transformations without an inverse function
- 3 Mappings between forecasts of the components and forecasts of the original series
- 4 Arbitrary forecast models

Overview

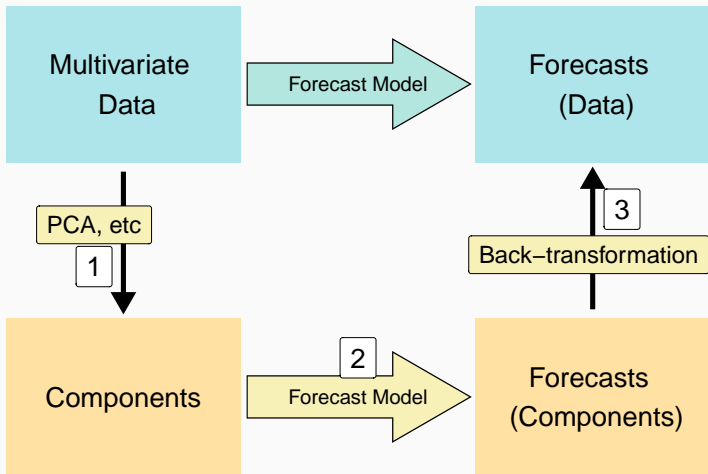

Overview

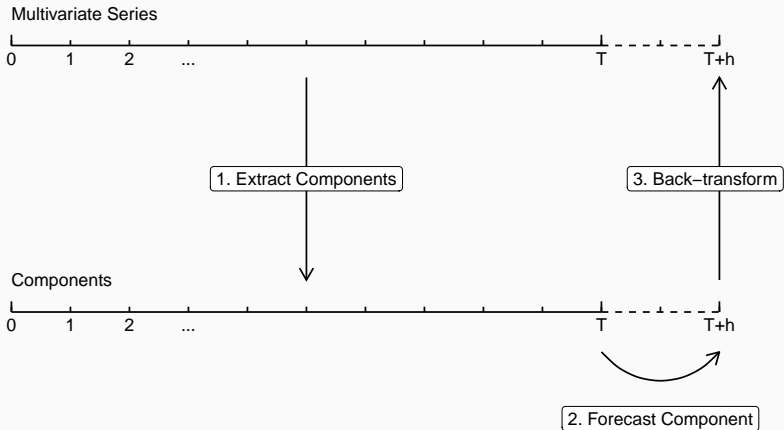

1. Components: Linear

Taking the first q linear combinations

$$\underset{T \times k}{\mathbf{Y}} \underset{k \times q}{\mathbf{W}} = \underset{T \times q}{\mathbf{C}},$$


where \mathbf{C} is the first q components, \mathbf{W} is the weighting matrix.

Principal Component Analysis (PCA)

Finding the weights matrix so that the resulting components **maximise variance**

Forecastable Component (ForeC)

Forecastable components (Goerg, 2013) maximise **forecastability**, finding linear combinations with **most regular patterns**

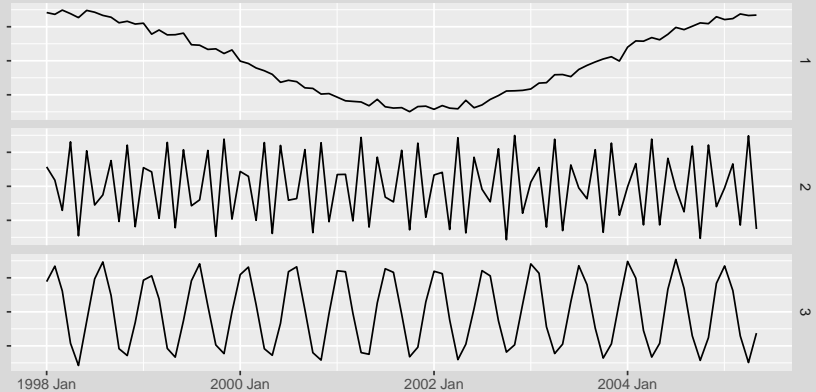

1. Component: Nonlinear

Manifold learning

Nonlinear dimension reduction that preserves the distances between points (relative locations of points) on a manifold

- Isomap, Laplacian Eigenmaps
- No back-transformation methods available

2. Forecast model


Arbitrary choice of forecast models

- ARIMA
- Exponential smoothing
- Dynamic regression models
- Machine learning methods
- etc

3. Back-transformation

- 1 Construct a training set
 - ▶ Bootstrap to increase the sample size
 - ▶ Expanding window to cover more sample values
 - ▶ Redo Component Extraction and Component Forecast on each bootstrapped set
- 2 Fit a back-transformation model using the above as the sample

Construct Training Set

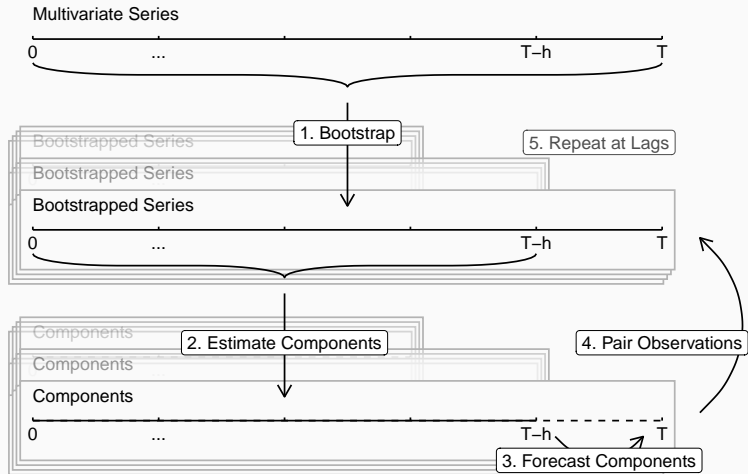


Bergmeir et al. (2016)

- 1 Box Cox Transformation
 - ▶ Stabilising variance
- 2 Seasonal and Trend decomposition using Loess (STL)
 - ▶ Separating series into trend, seasonality and the stationary remainder
- 3 Moving Block Bootstrap (MBB)
 - ▶ Bootstrapping stationary remainder
- 4 Adding back trend and seasonality.
Reversing Box Cox transformation.


STL Decomposition

STL decomposition


value = trend + season_year + remainder

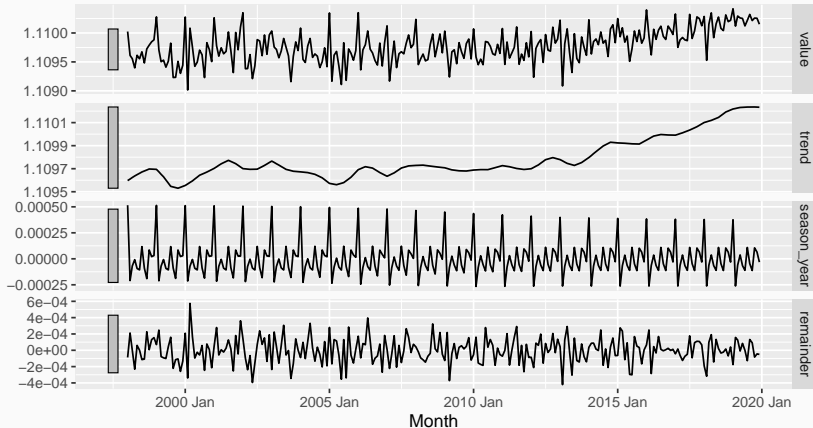

MMB on the remainder

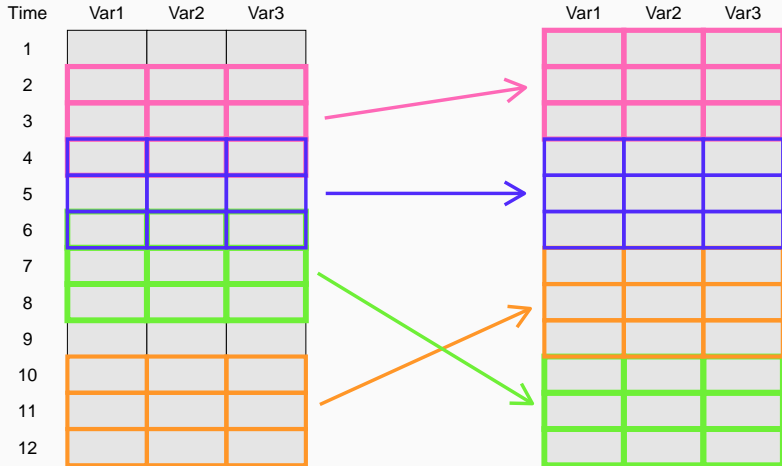

Overview

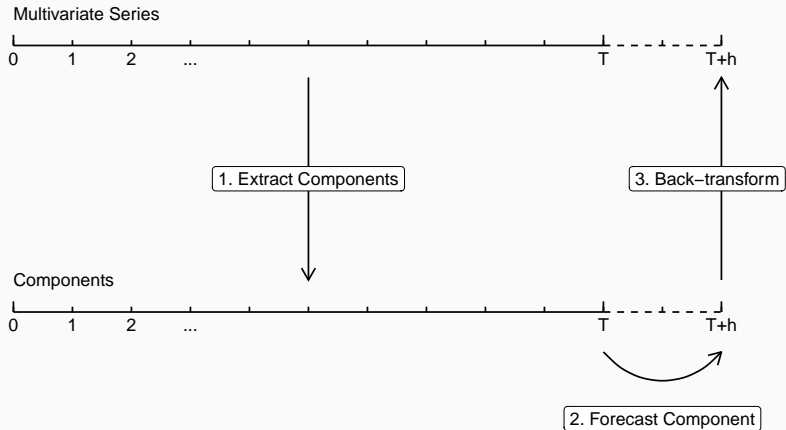

Results

Performance Measure (cross-validation)

$$mRMSSE = \frac{1}{Mk} \sum_j^M \sum_i^k \sqrt{\frac{(y_{T-j+h,i} - \hat{y}_{T-j,h,i})^2}{\frac{1}{T-j-\nu} \sum_{t=1+\nu}^{T-j} (y_{ti} - y_{t-\nu,i})^2}}$$


Multiple Comparisons with the Best (MCB)

Compare Average ranks of mRMSSE in cross-validations (Koning et al., 2005)

Forecast model

Automatically selected Exponential Smoothing (ETS) model using AICc

Australian tourism

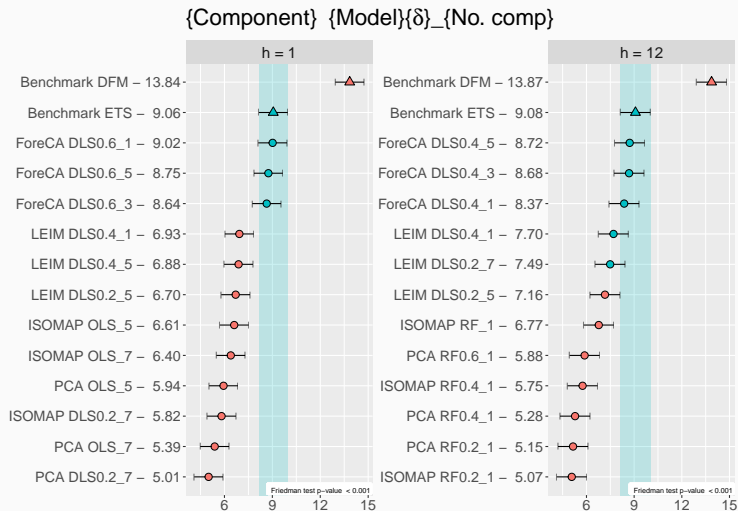

Outcome

- Generic method to forecast using lower dimensional components with arbitrary choices of components and forecast models
- Robust to the number of components
- PCA and ISOMAP are most competitive
- Random forest works best for longer term forecast. Linear models work best for short term forecast.

Appendix



Isomap

- 1 Construct Nearest Neighbour Graph
- 2 Estimate the Geodesic distances (distances along a manifold)
- 3 Apply Classical MDS
 - ▶ Input distances
 - ▶ Output coordinates in a lower dimension with similar distances



Other Components

Laplacian Eigenmaps, etc

Isomap

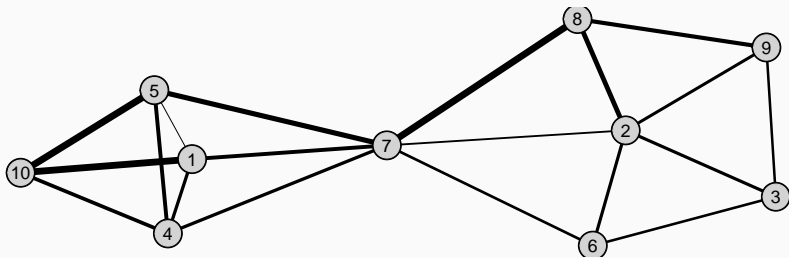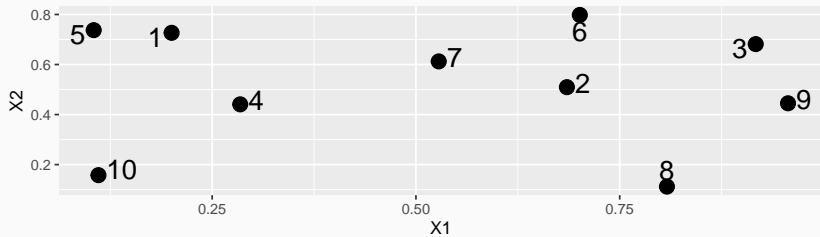

Isomap

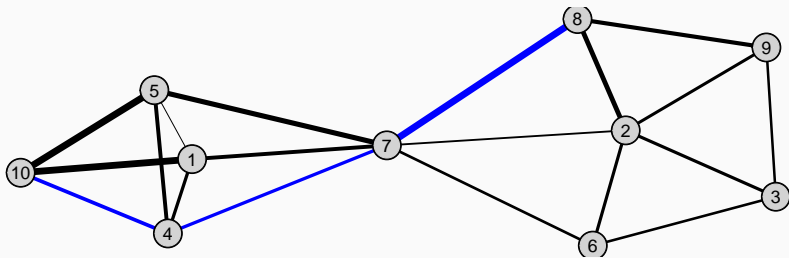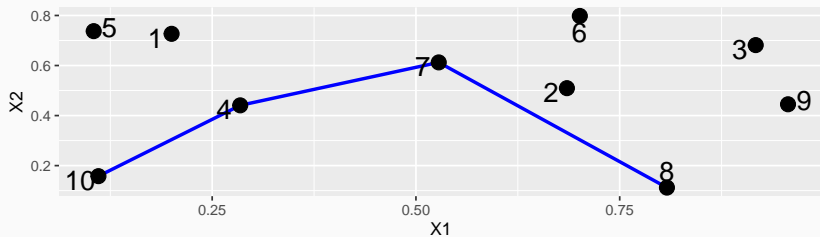


Components Clustering

Problem

- Some components do not have order.
 - ▶ e.g. ForeCA
- Components from the bootstraps should provide similar information about the future

Components Clustering: Before

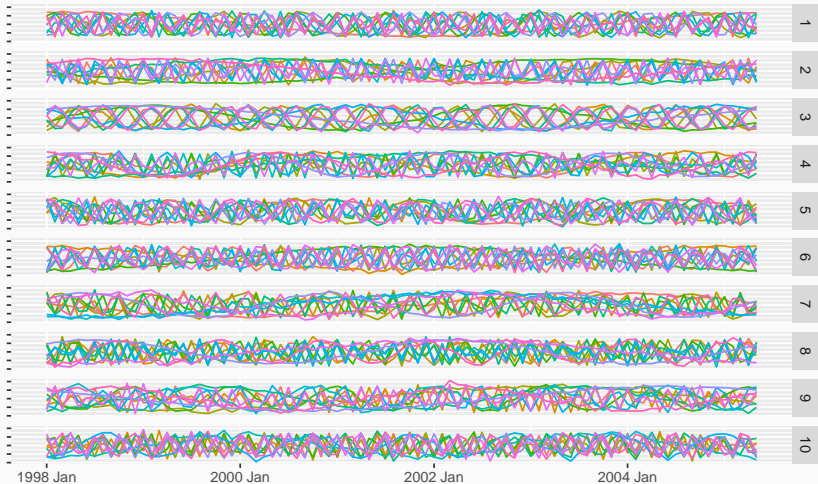


Components Clustering


Solution: Feature-based clustering

- 1 Calculate features from each component
 - ▶ Highly comparative time-series analysis:
Fulcher and Jones (2017)
 - ▶ Talagala et al. (2023)
- 2 Cluster the features
 - ▶ K-means with cannot-link constraints: COP
kmeans Wagstaff et al. (2001)


Components Clustering: After

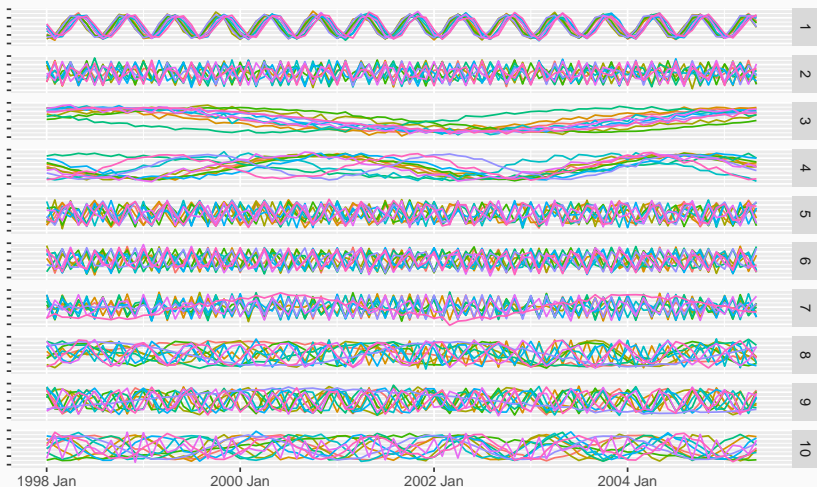

Overview

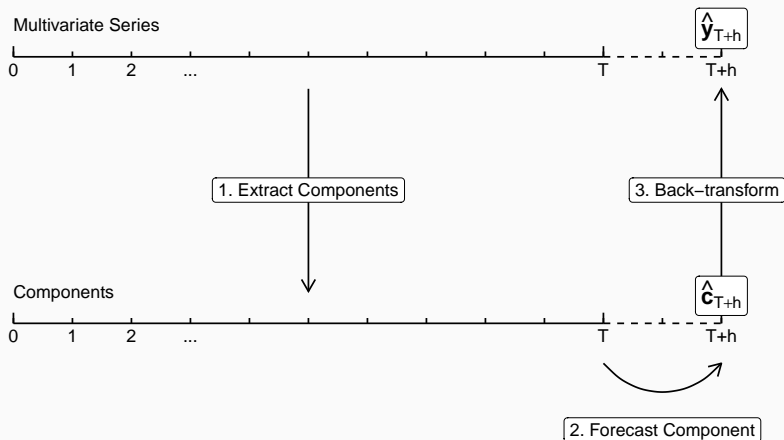

Construct Training Set

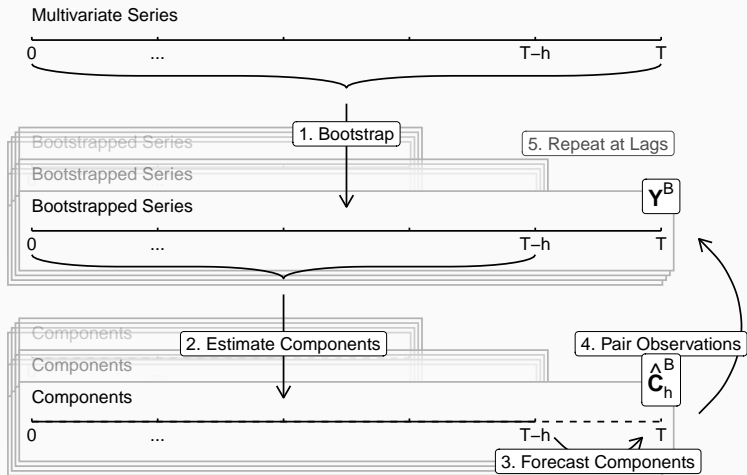

Back-transformation Model

- $\hat{\mathbf{C}}_h^B$: h -step-ahead forecasts of components from different bootstraps at different lags
- \mathbf{Y}^B : the corresponding “real” values of the original series from bootstraps
- $\hat{\mathbf{c}}_{T+h}$: h -step-ahead forecasts of components of the original series
- $\hat{\mathbf{y}}_{T+h}$: h -step-ahead forecasts of the original series
- \mathbf{S} : collection of seasonal dummies corresponding to $\hat{\mathbf{C}}_h^B$
- \mathbf{s}_{T+h} : seasonal dummies at time $T + h$
- $\mathbf{X} = \begin{bmatrix} \hat{\mathbf{C}}_h^B & \mathbf{S} \end{bmatrix}$

Back-transformation Model

$$\hat{\mathbf{y}}_{T+h} = f(\hat{\mathbf{c}}_{T+h}, \mathbf{s}_{T+h})$$


Discounted Least Squares (DLS)

$$\hat{\mathbf{y}}_{T+h} = \hat{\mathbf{B}}' \begin{bmatrix} \hat{\mathbf{c}}_{T+h} \\ \mathbf{s}_{T+h} \end{bmatrix}$$


$$\hat{\mathbf{B}} = (\mathbf{X}'\mathbf{U}\mathbf{X})^{-1}\mathbf{X}'\mathbf{U}\mathbf{Y}^{\mathbf{B}},$$

Discounted Least Squares (DLS)

$$u = \delta(1 - \delta)^{\text{YearLag}}$$

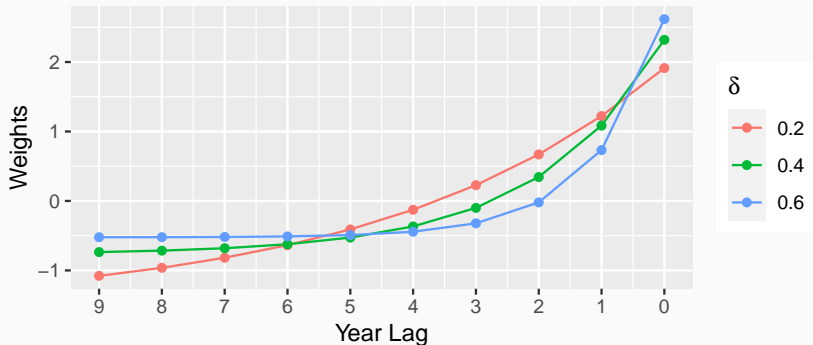

Australian tourism: PCA

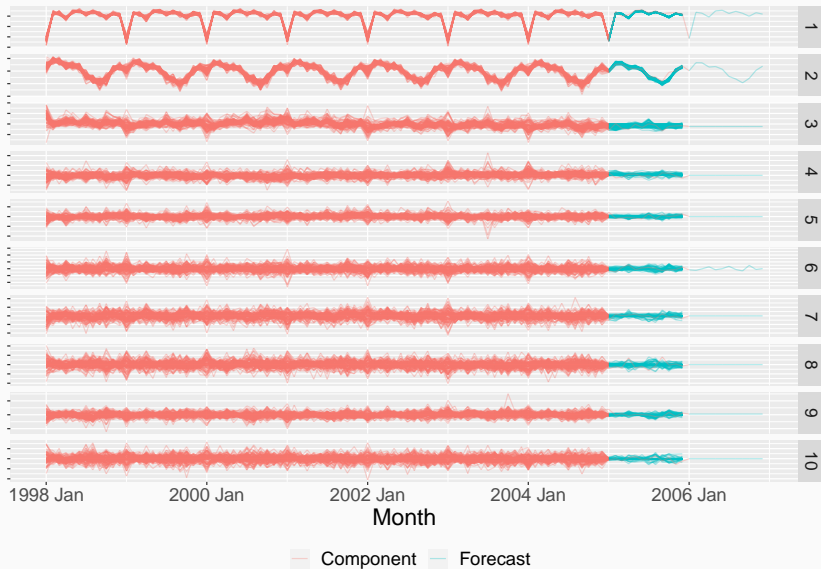

Box Cox Transformation


Modified version of Bickel and Doksum (1981)

$$w_t = \begin{cases} \log(y_t) & \text{if } \lambda = 0; \\ (\text{sign}(y_t)|y_t|^\lambda - 1)/\lambda & \text{otherwise,} \end{cases}$$

Reverse transformation

$$y_t = \begin{cases} \exp(w_t) & \text{if } \lambda = 0; \\ \text{sign}(\lambda w_t + 1)|\lambda w_t + 1|^{1/\lambda} & \text{otherwise.} \end{cases}$$

Box Cox Transformation

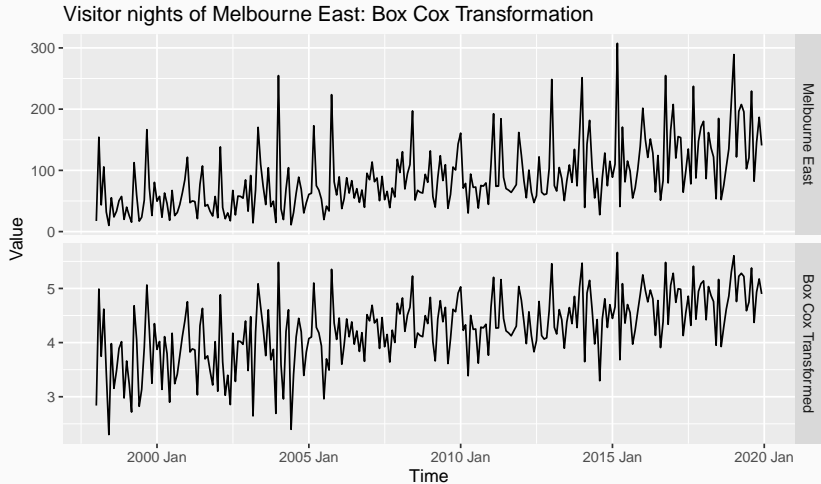

References i

- Jushan Bai and Serena Ng. Large dimensional factor analysis. *Foundations and Trends® in Econometrics*, 3(2):89–163, 2008. ISSN 1551-3076. doi: 10.1561/0800000002. URL <http://dx.doi.org/10.1561/0800000002>.
- Christoph Bergmeir, Rob J Hyndman, and José M Benítez. Bagging exponential smoothing methods using STL decomposition and Box–Cox transformation. *International J Forecasting*, 32(2):303–312, 1 April 2016. ISSN 0169-2070. doi: 10.1016/j.ijforecast.2015.07.002. URL <https://www.sciencedirect.com/science/article/pii/S0169207015001120>.
- Peter J Bickel and Kjell A Doksum. An analysis of transformations revisited. *J. American Statistical Association*, 76(374):296–311, June 1981. ISSN 0162-1459, 1537-274X. doi: 10.1080/01621459.1981.10477649. URL <https://www.tandfonline.com/doi/abs/10.1080/01621459.1981.10477649>.

References ii

- Jacopo De Stefani and Gianluca Bontempi. Factor-Based framework for multivariate and multi-step-ahead forecasting of large scale time series. *Frontiers in Big Data*, 4:690267, 10 September 2021. ISSN 2624-909X. doi: 10.3389/fdata.2021.690267. URL <http://dx.doi.org/10.3389/fdata.2021.690267>.
- Ben D Fulcher and Nick S Jones. hctsa: A computational framework for automated Time-Series phenotyping using massive feature extraction. *Cell Systems*, 5(5):527–531.e3, 22 November 2017. ISSN 2405-4712. doi: 10.1016/j.cels.2017.10.001. URL <http://dx.doi.org/10.1016/j.cels.2017.10.001>.
- Georg Goerg. Forecastable component analysis. In *Proceedings of the 30th International Conference on Machine Learning*, pages 64–72, Atlanta, Georgia, 2013. URL <http://proceedings.mlr.press/v28/goerg13.pdf>.

References iii

- Alex J Koning, Philip Hans Franses, Michèle Hibon, and H O Stekler. The M3 competition: Statistical tests of the results. *International J. Forecasting*, 21 (3):397–409, 1 July 2005. ISSN 0169-2070. doi: 10.1016/j.ijforecast.2004.10.003. URL <https://www.sciencedirect.com/science/article/pii/S0169207004000810>.
- Thiyanga S Talagala, Rob J Hyndman, and George Athanasopoulos. Meta-learning how to forecast time series. *J Forecasting*, 2023. doi: 10.1002/for.2963. URL <https://doi.org/10.1002/for.2963>.
- Kiri Wagstaff, Claire Cardie, Seth Rogers, and Stefan Schrödl. Constrained k-means clustering with background knowledge. In *Proceedings of the 18th International Conference on Machine Learning*, pages 577–584, 2001. URL <https://web.cse.msu.edu/~cse802/notes/ConstrainedKmeans.pdf>.