

# Multi-variable Quantification of BDDs in External Memory using Nested Sweeping

---

**Steffan Christ Sølvesten**, Jaco van de Pol


TACAS 2025






1986

# Binary Decision Diagrams



**(a)**  $(x_0 \wedge x_1 \wedge x_3) \vee (x_2 \oplus x_3)$

# Binary Decision Diagrams




(a)  $(x_0 \wedge x_1 \wedge x_3) \vee (x_2 \oplus x_3)$

## Theorem (Bryant '86)


*Given a fixed variable order, a (Reduced Ordered) Binary Decision Diagram is a unique canonical representation of a Boolean function.*

# Binary Decision Diagrams



**(a)**  $(x_0 \wedge x_1 \wedge x_3) \vee (x_2 \oplus x_3)$

# Binary Decision Diagrams



(a)  $(x_0 \wedge x_1 \wedge x_3) \vee (x_2 \oplus x_3)$

## Theorem (Bryant '86)

Given BDDs  $\phi$  and  $\psi$ ,  $\phi \odot \psi$  is computable in  $\mathcal{O}(|\phi| \cdot |\psi|)$  time.

## Theorem (Bryant '86)

Given BDD  $\phi$  and Boolean  $b$ ,  $\phi[x_i \mapsto b]$  is computable in  $\mathcal{O}(|\phi|)$  time.

## Corollary

Given BDD  $\phi$ ,  $\exists x_i. \phi(x)$  requires  $\mathcal{O}(|\phi|^2)$  time.

## Proof.


$\exists x_i. \phi(x_i) \equiv \phi[x_i \mapsto \perp] \vee \phi[x_i \mapsto \top]$

□




1996

$\exists x_i. \phi(x_i)$







$\exists x_i. \phi(x_i) : \text{Apply}$

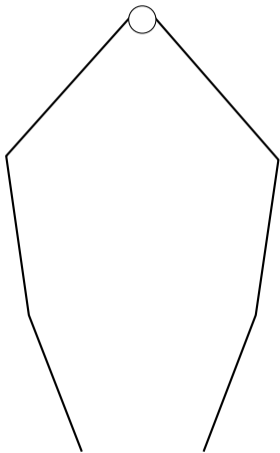


$\exists x_i. \phi(x_i) : \text{Apply}$

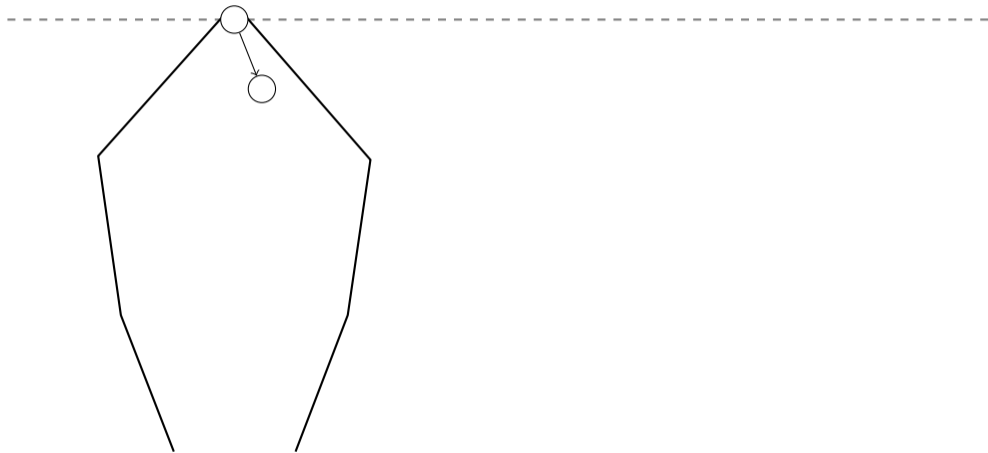


$\exists x_i. \phi(x_i) : \text{Apply}$

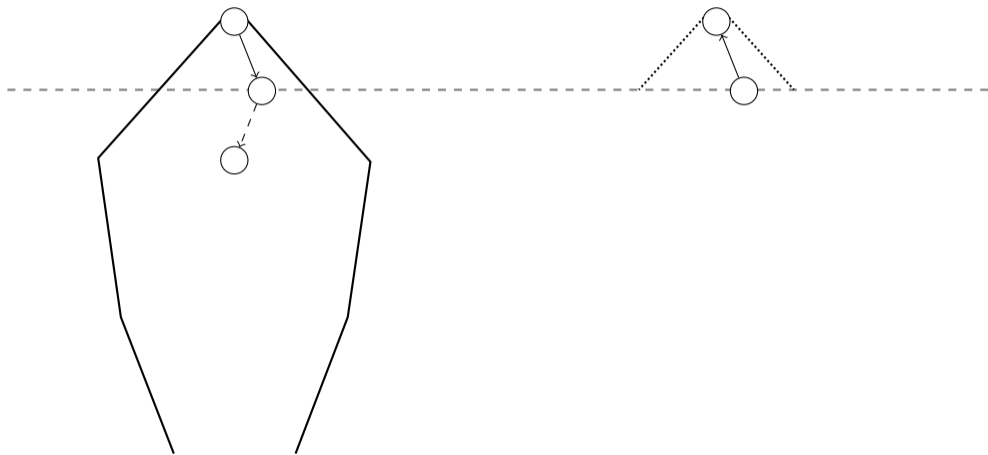


$\exists x_i. \phi(x_i) : \text{Apply}$

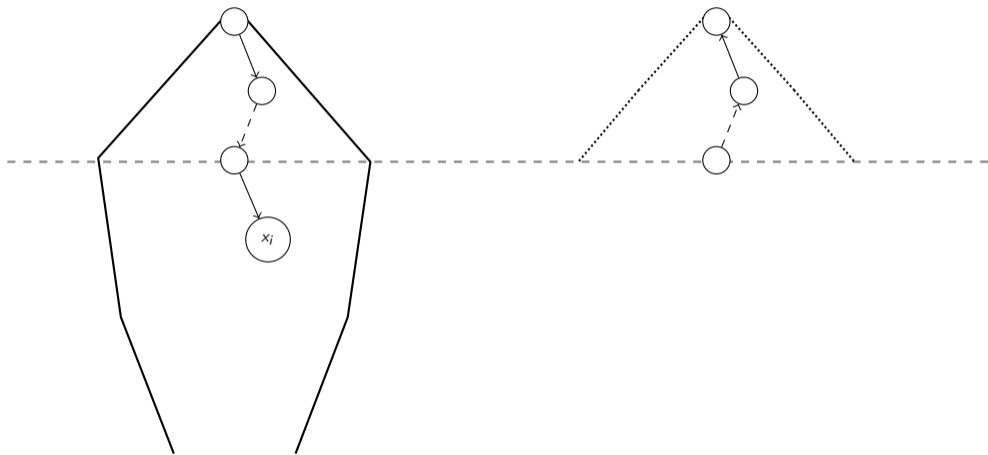


$\exists x_i. \phi(x_i) : \text{Apply}$

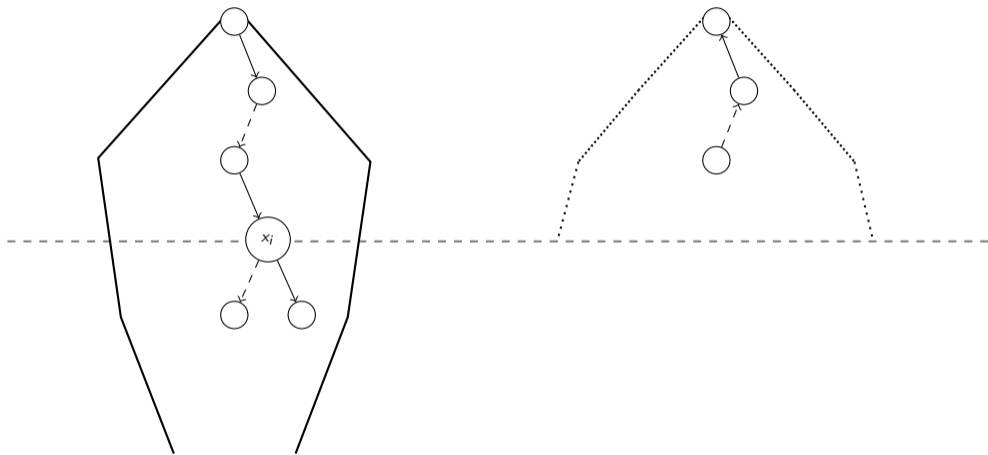



$\exists x_i. \phi(x_i) : \text{Apply}$

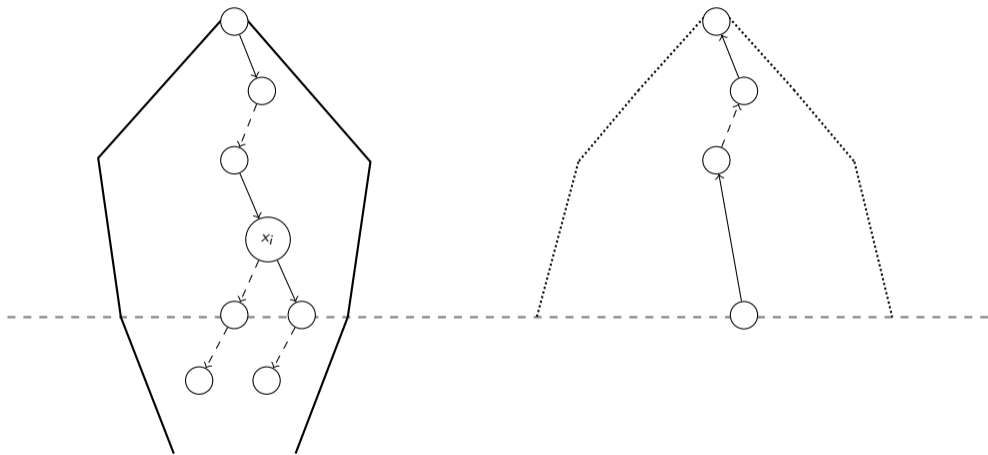

$\exists x_i. \phi(x_i) : \text{Apply}$

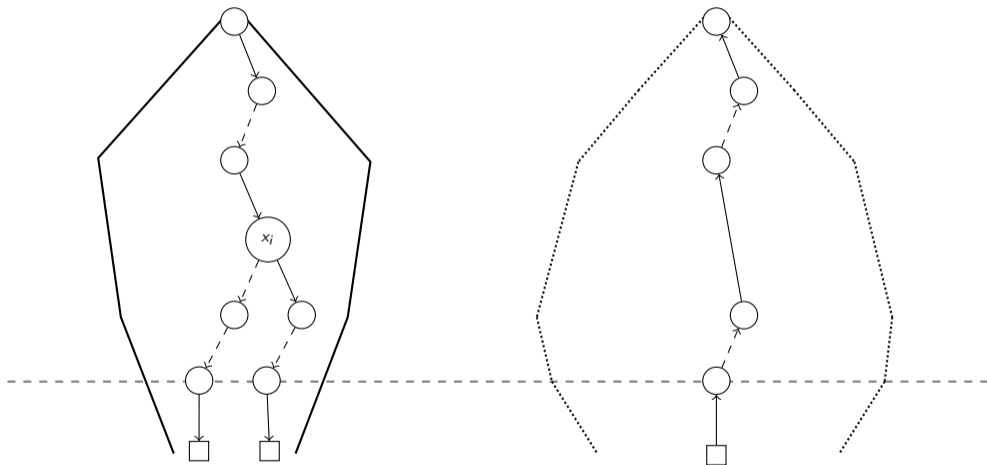


$\exists x_i. \phi(x_i) : \text{Apply}$

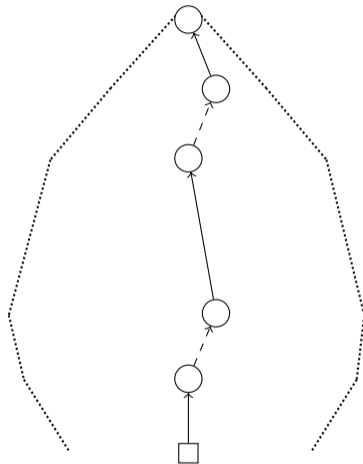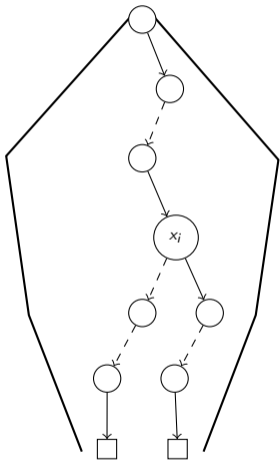





$\exists x_i. \phi(x_i) : \text{Reduce}$

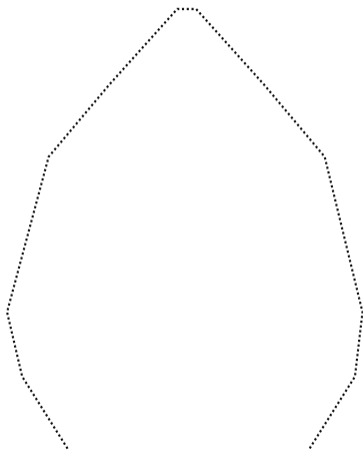


$\exists x_i. \phi(x_i) : \text{Reduce}$

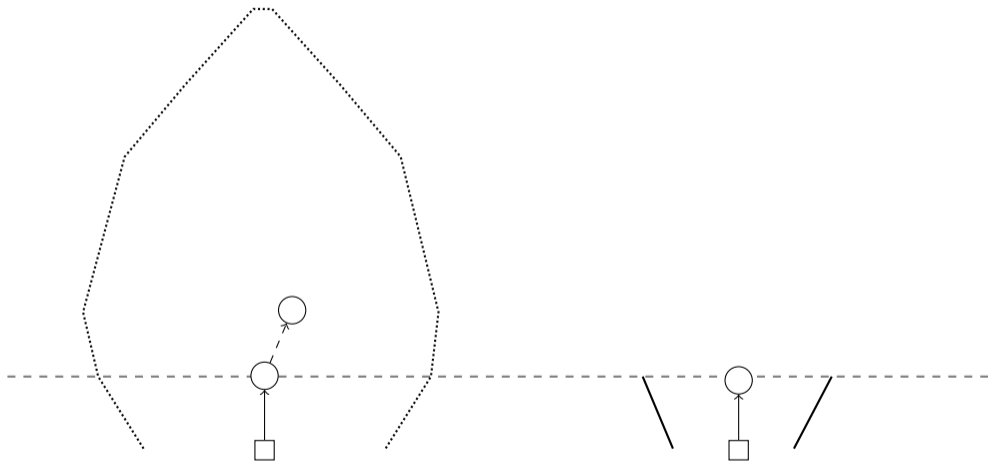


$\exists x_i. \phi(x_i) : \text{Reduce}$

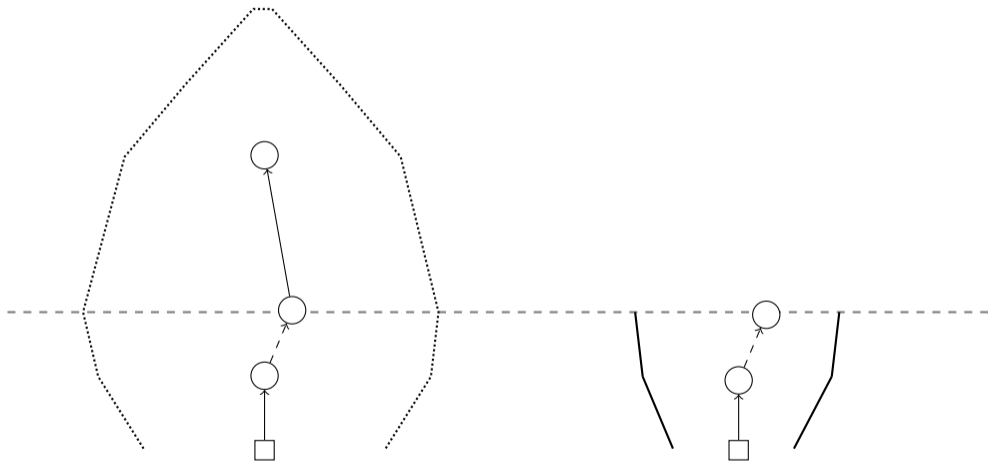


$\exists x_i. \phi(x_i) : \text{Reduce}$

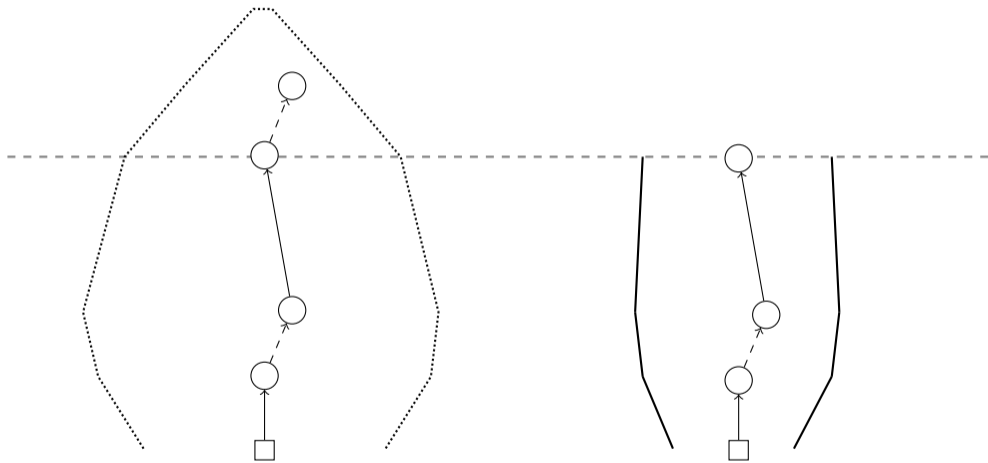

$\exists x_i. \phi(x_i) : \text{Reduce}$

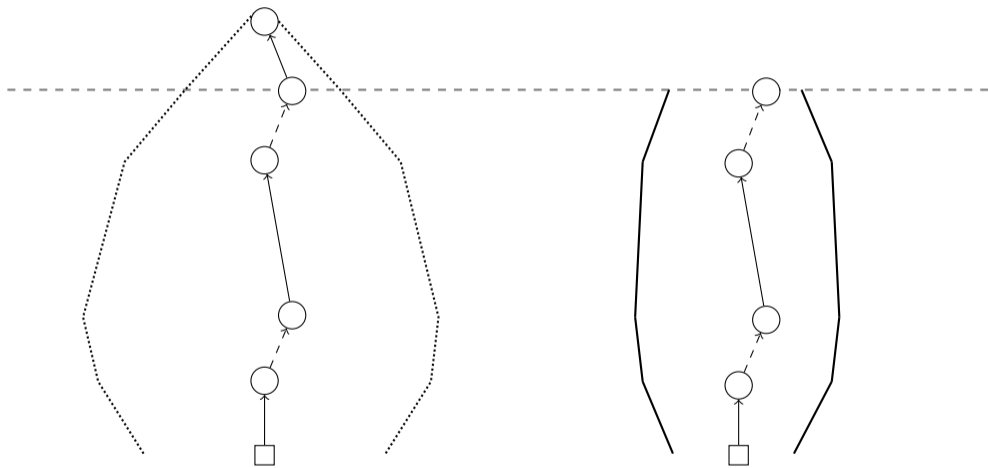

$\exists x_i. \phi(x_i) : \text{Reduce}$

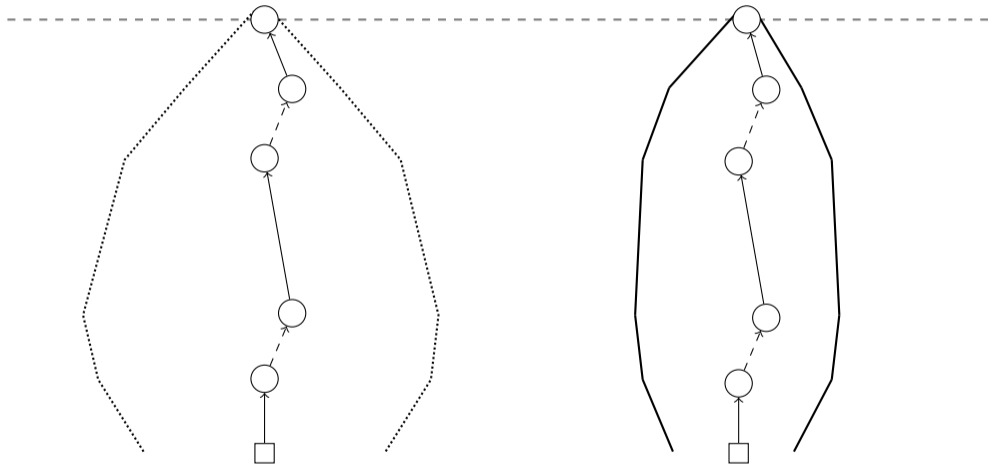

$\exists x_i. \phi(x_i)$

**Theorem (Lars Arge '96)**

*Given BDDs  $\phi$  and  $\psi$ ,  $\phi \odot \psi$  is computable in  $\mathcal{O}(\text{sort}(|\phi| \cdot |\psi|))$  time and I/Os.*

**Theorem (Sølvsten et al. '22)**

*Given BDD  $\phi$  and Boolean  $b$ ,  $\phi[x_i \mapsto b]$  is computable in  $\mathcal{O}(\text{sort}(|\phi|))$  time and I/Os.*

$\exists x_i. \phi(x_i)$

**Theorem (Lars Arge '96)**

Given BDDs  $\phi$  and  $\psi$ ,  $\phi \odot \psi$  is computable in  $\mathcal{O}(\text{sort}(|\phi| \cdot |\psi|))$  time and I/Os.

**Theorem (Sølvsten et al. '22)**

Given BDD  $\phi$  and Boolean  $b$ ,  $\phi[x_i \mapsto b]$  is computable in  $\mathcal{O}(\text{sort}(|\phi|))$  time and I/Os.

**Corollary (Sølvsten et al. '22)**

Given BDD  $\phi$ , the time and I/O complexity of quantification is

- $\mathcal{O}(\text{sort}(|\phi|^2))$  for a single variable.
- $\mathcal{O}(\text{sort}(|\phi|^{2^k}))$  for  $k$  variables.





2022

# Adiar

*I/O-efficient Decision Diagrams*


---

[github.com/ssoelvsten/adiar](https://github.com/ssoelvsten/adiar)




2025


$\exists \vec{x}. \phi(\vec{x})$

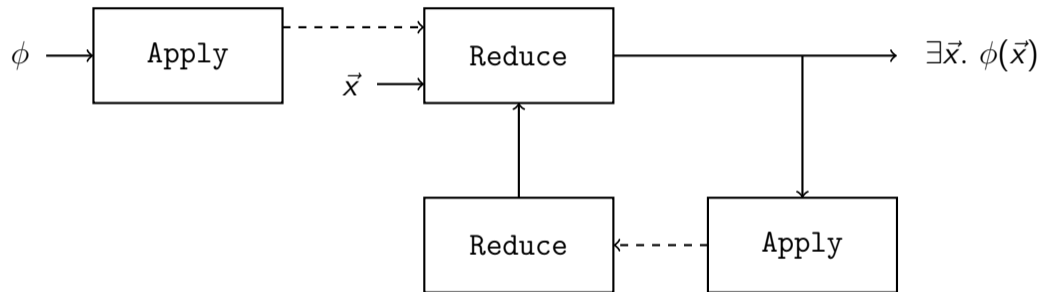


$\exists \vec{x}. \phi(\vec{x})$

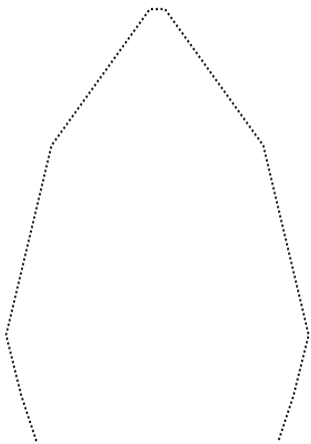


$\exists \vec{x}. \phi(\vec{x})$

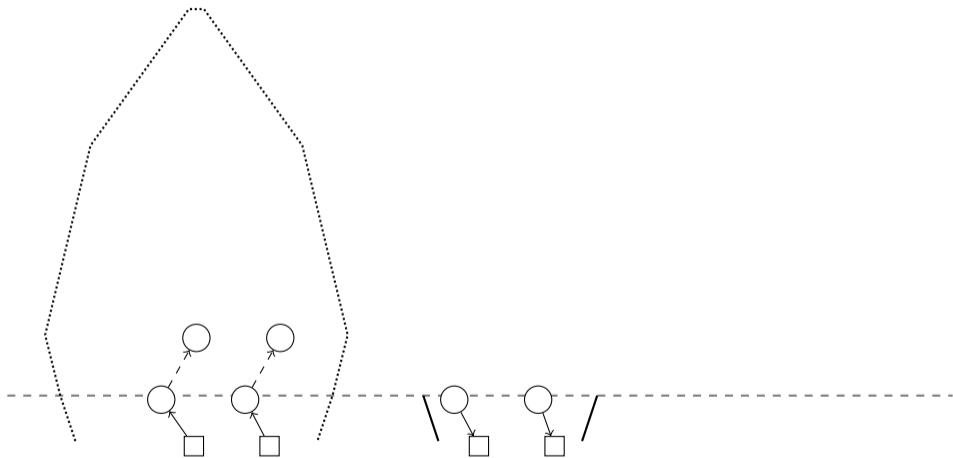

$\exists \vec{x}. \phi(\vec{x})$

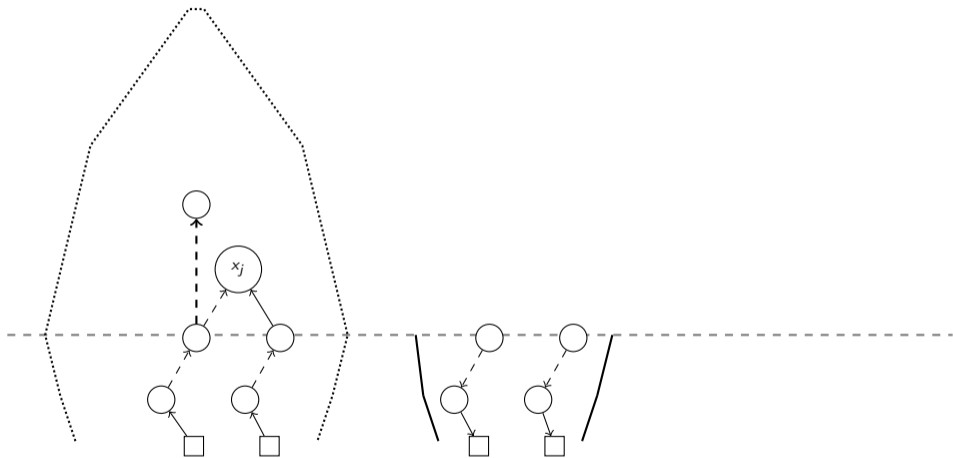


$\exists \vec{x}. \phi(\vec{x})$

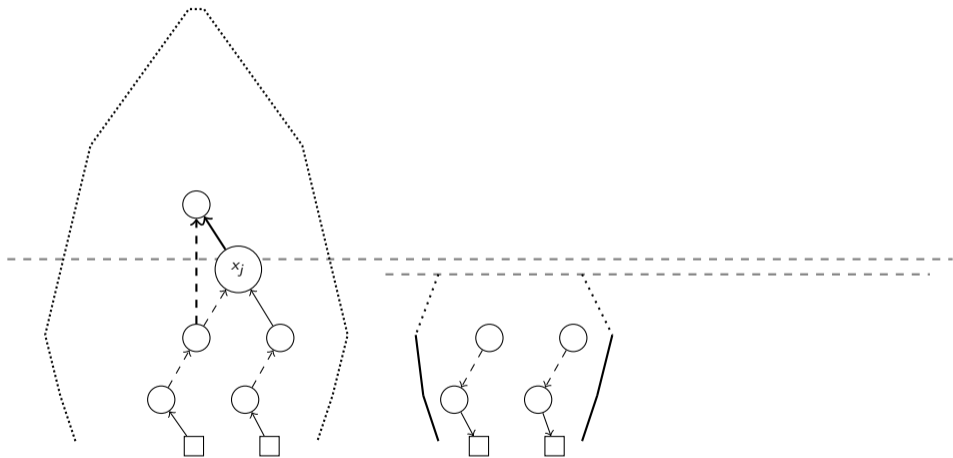





$\exists \vec{x}. \phi(\vec{x})$

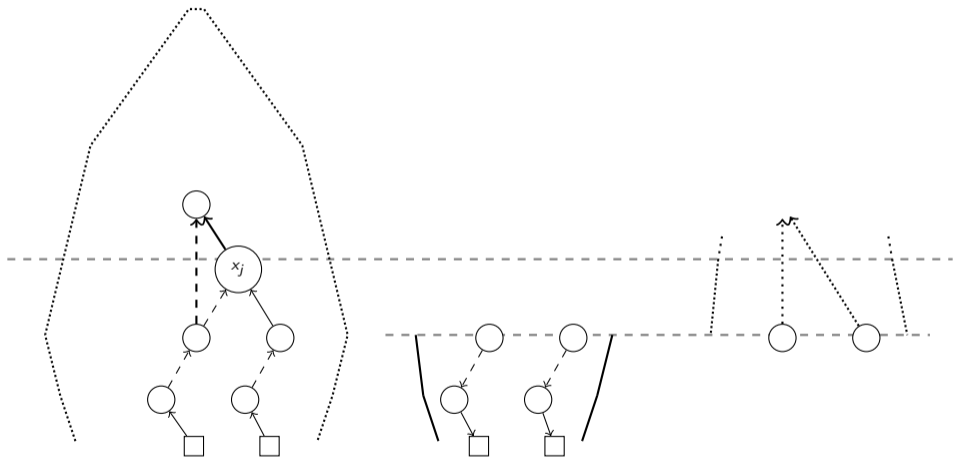


$\exists \vec{x}. \phi(\vec{x})$

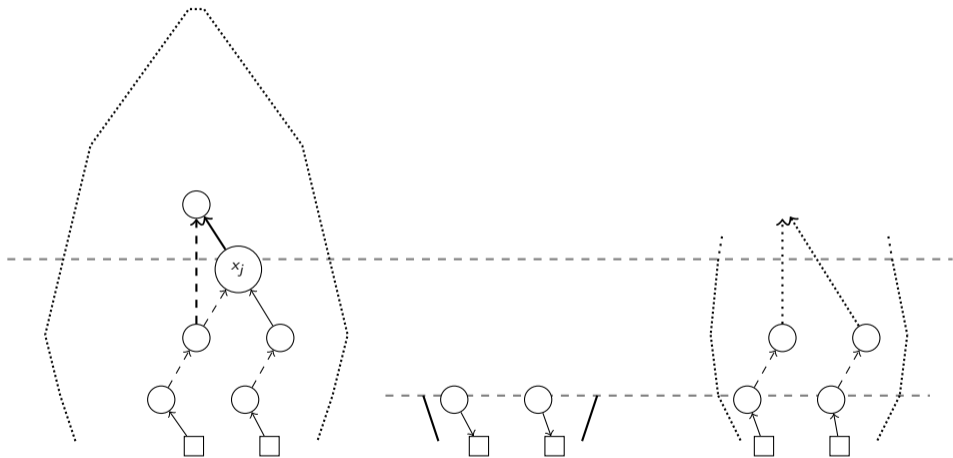


$\exists \vec{x}. \phi(\vec{x})$

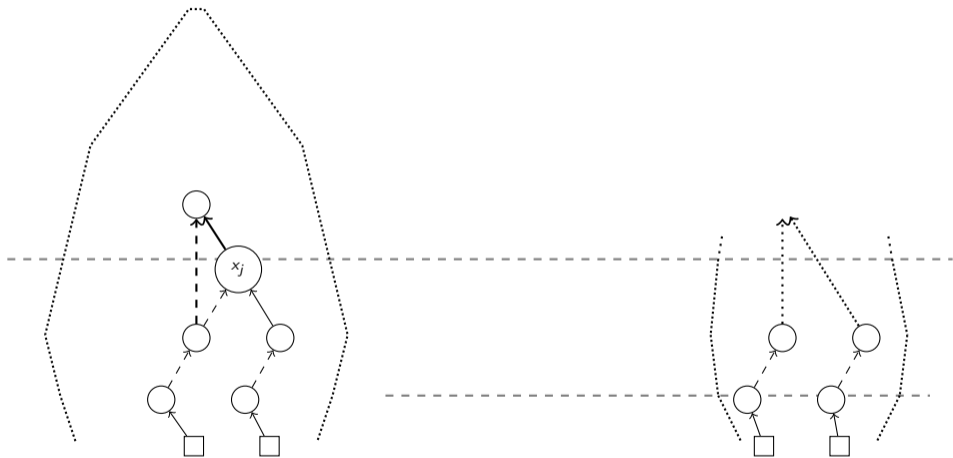


$\exists \vec{x}. \phi(\vec{x})$

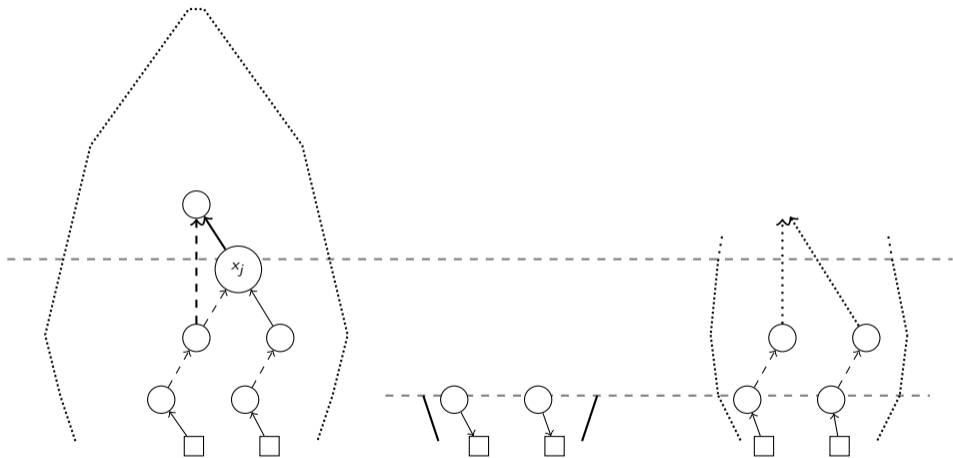


$\exists \vec{x}. \phi(\vec{x})$

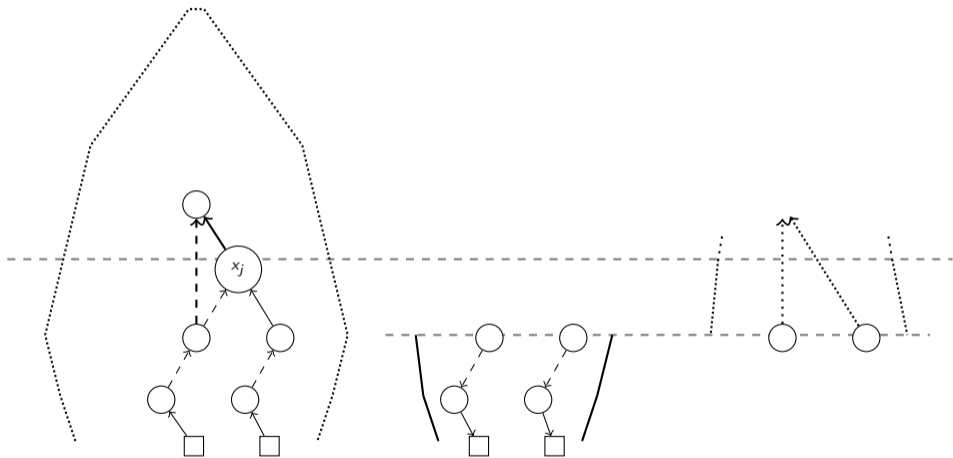


$\exists \vec{x}. \phi(\vec{x})$

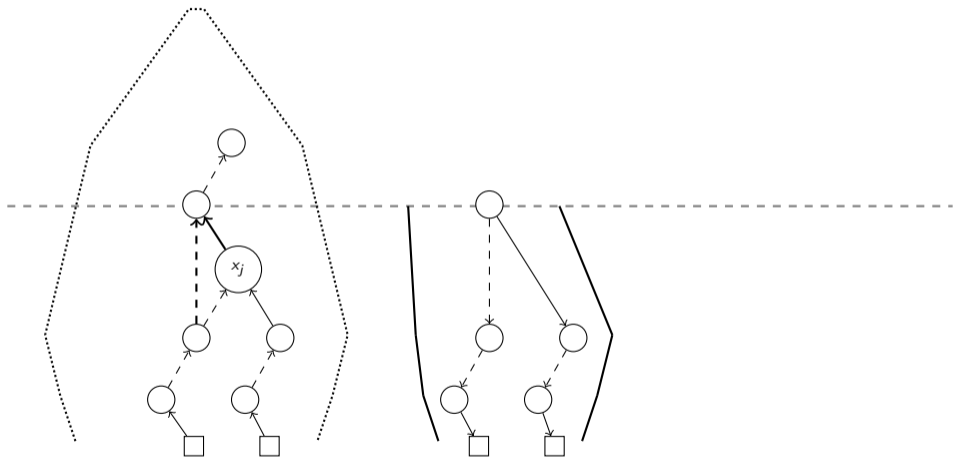

$\exists \vec{x}. \phi(\vec{x})$

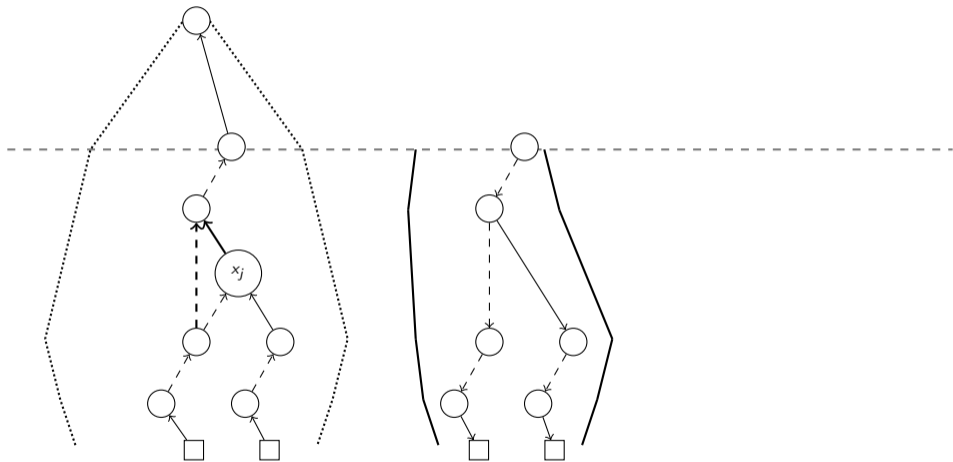


$\exists \vec{x}. \phi(\vec{x})$

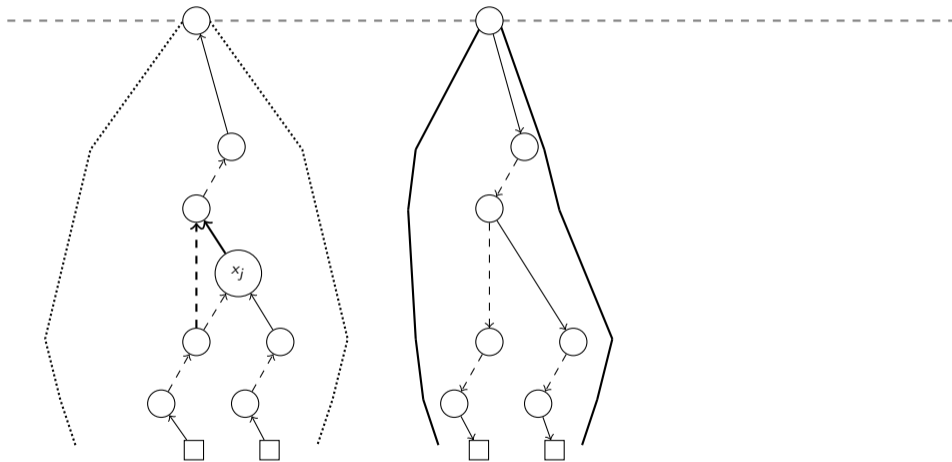



$\exists \vec{x}. \phi(\vec{x})$

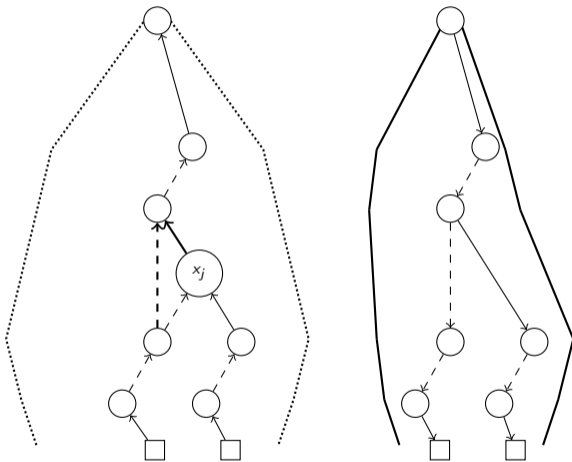

$\exists \vec{x}. \phi(\vec{x})$

## Theorem (Sølvsten et al. '25)

Given BDD  $\phi$ , the quantification of  $k$  variables,  $\exists \vec{x}. \phi(\vec{x})$ , is computable in  $\mathcal{O}(\text{sort}(|\phi|^{2^k}))$  time and I/Os.

# Benchmarks


## Garden-of-Eden

Given dimensions  $N_1, N_2 \in \mathbb{N}$ , determine whether there exists in Conway's *Game of Life* an initial state of size  $N_1 \times N_2$  that is a *Garden of Eden*, i.e. is otherwise unreachable.


## Quantified Boolean Formula

Determine whether a Boolean formula  $\exists \vec{x}_1 \forall \vec{x}_2 \dots \exists \vec{x}_k. \phi(\vec{x}_1, \vec{x}_2, \dots, \vec{x}_k)$  (or any order of quantifiers) evaluates to  $\top$  or  $\perp$ . For inputs, we use the two-player games from: Irfansha Shaik and Jaco van de Pol: "*Concise QBF encodings for games on a grid (extended version)*". arXiv (2023).


## Benchmarks : Single vs. Nested Quantification

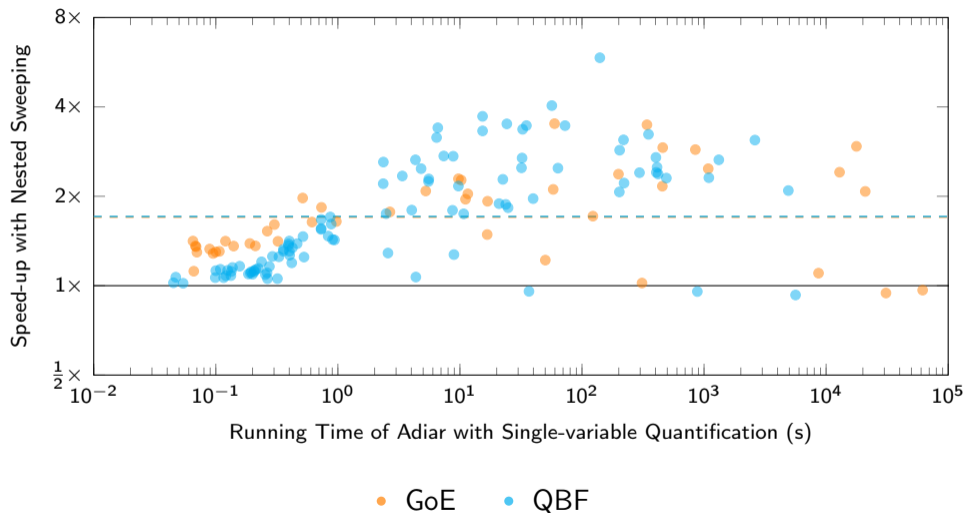


## Benchmarks : Comparison to CAL

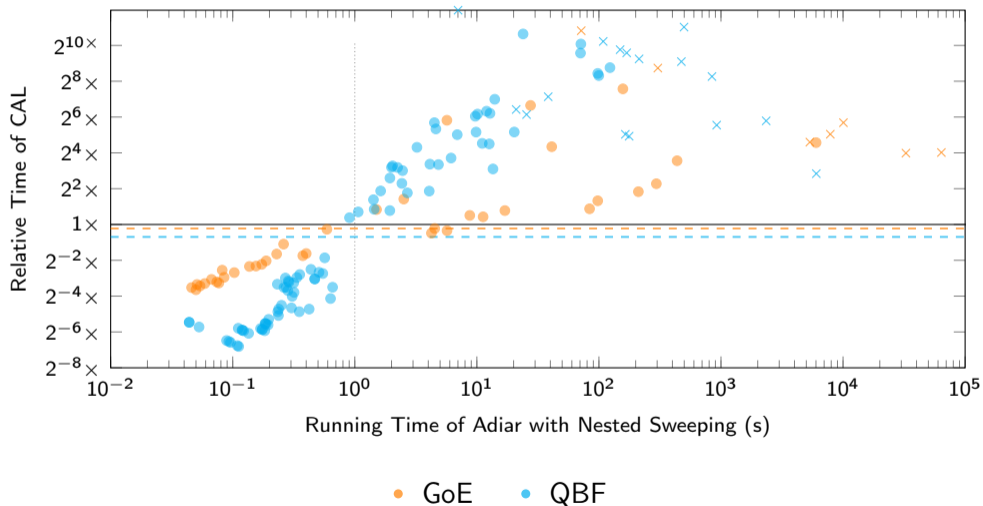

# Benchmarks : Comparison to BuDDy and CUDD

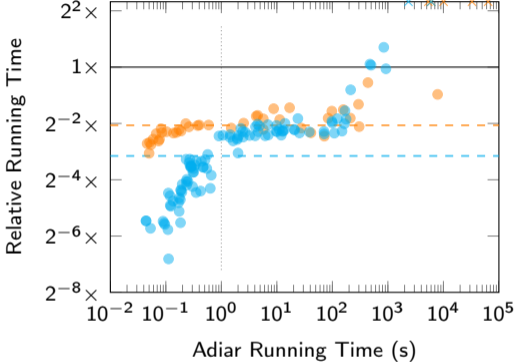

(a) BuDDy

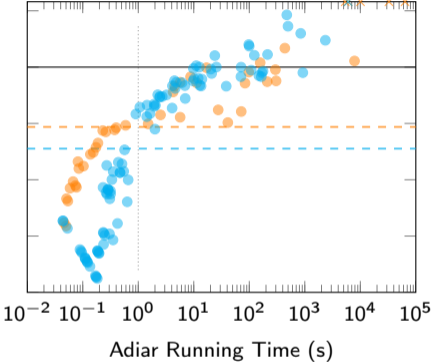

(b) CUDD

• GoE • QBF

## Steffan Christ Sølvsten

---

✉ [soelvsten@cs.au.dk](mailto:soelvsten@cs.au.dk)

🌐 [ssoelvsten.github.io](https://ssoelvsten.github.io)

## Adiar

---

📄 [github.com/ssoelvsten/adiar](https://github.com/ssoelvsten/adiar)

📖 [ssoelvsten.github.io/adiar](https://ssoelvsten.github.io/adiar)



## Nested Sweeping Framework

---

New BDD algorithms:

- ☑ Multi-variable Quantification
- ☑ Relational Product
- Functional Composition
- Variable Reordering

Other Decision Diagrams:

- Quantum Multi-valued Decision Diagrams
- Polynomial Boolean Rings

	Single Quantification		Nested Sweeping	
	LOC	# Tests	LOC	# Tests
nested_sweeping.h	–	–	1287	104
quantify	548	84	1152	152
core/...	326	–	904	–
bdd/...	122	64	157	108
zdd/...	100	20	20	44



